




OIL ANALYSIS REPORT

Sample Rating Trend

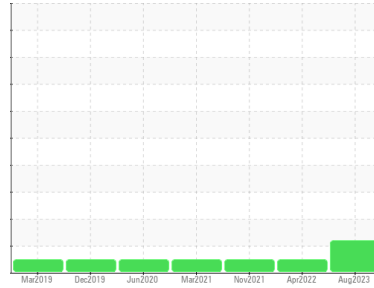

ISO



Area
METRO
 Machine Id
METRO 20018
 Component
Rear Differential
 Fluid
GEAR OIL SAE 75W90 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0843198	WC0692970	WC0631733
Sample Date	Client Info		18 Aug 2023	27 Apr 2022	03 Nov 2021
Machine Age	mls	Client Info	411974	300478	256336
Oil Age	mls	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			ABNORMAL	NORMAL	NORMAL

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >500	254	269	252
Chromium	ppm	ASTM D5185m >10	2	2	2
Nickel	ppm	ASTM D5185m >10	<1	<1	<1
Titanium	ppm	ASTM D5185m	<1	<1	<1
Silver	ppm	ASTM D5185m	<1	<1	2
Aluminum	ppm	ASTM D5185m >25	6	5	5
Lead	ppm	ASTM D5185m >25	0	0	0
Copper	ppm	ASTM D5185m >100	2	2	2
Tin	ppm	ASTM D5185m >10	0	0	0
Antimony	ppm	ASTM D5185m >5	---	---	0
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	<1

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 400	334	404	347
Barium	ppm	ASTM D5185m 200	3	2	3
Molybdenum	ppm	ASTM D5185m 12	0	<1	<1
Manganese	ppm	ASTM D5185m	4	4	4
Magnesium	ppm	ASTM D5185m 12	2	2	4
Calcium	ppm	ASTM D5185m 150	10	11	11
Phosphorus	ppm	ASTM D5185m 1650	1708	1875	1830
Zinc	ppm	ASTM D5185m 125	<1	12	10
Sulfur	ppm	ASTM D5185m 22500	26471	23605	20926

CONTAMINANTS






	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >75	80	78	76
Sodium	ppm	ASTM D5185m	7	9	9
Potassium	ppm	ASTM D5185m >20	3	1	3
Water	%	ASTM D6304 >.2	0.066	0.039	0.078
ppm Water	ppm	ASTM D6304 >2000	660.0	398.7	780.7

FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>20000	▲ 113568	---	---
Particles >6µm	ASTM D7647	>5000	▲ 9164	---	---
Particles >14µm	ASTM D7647	>640	18	---	---
Particles >21µm	ASTM D7647	>160	3	---	---
Particles >38µm	ASTM D7647	>40	0	---	---
Particles >71µm	ASTM D7647	>10	0	---	---
Oil Cleanliness	ISO 4406 (c)	>21/19/16	▲ 24/20/11	---	---

FLUID DEGRADATION


	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 2.00	2.83	2.64	3.115

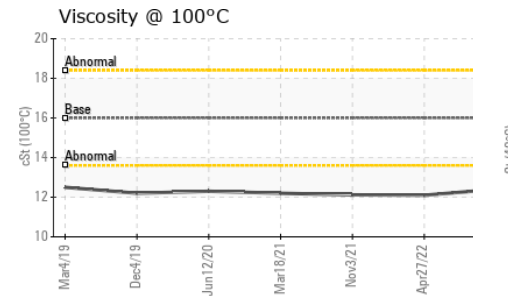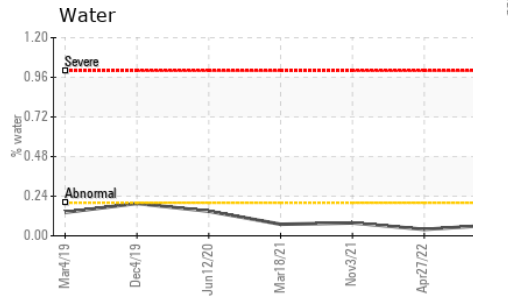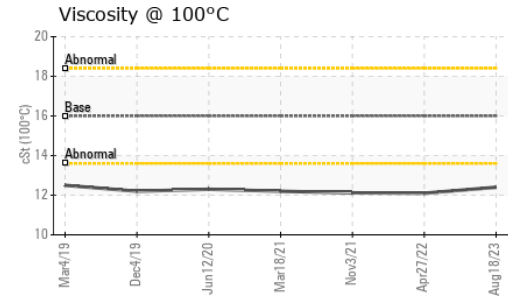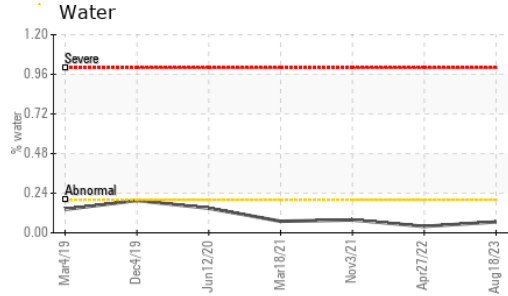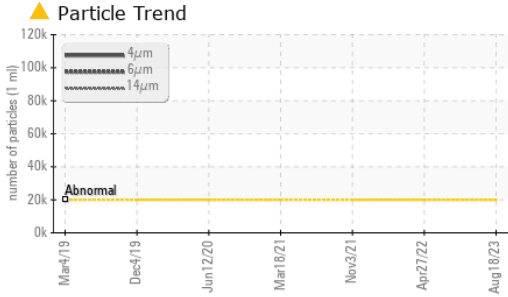






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	VLITE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	109	80.2	74.9
Visc @ 100°C	cSt	ASTM D445	16.0	12.4	12.1
Viscosity Index (VI)	Scale	ASTM D2270	157	152	158

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

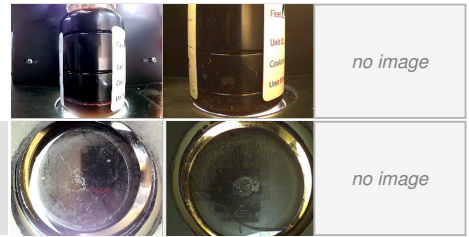

GRAPHS

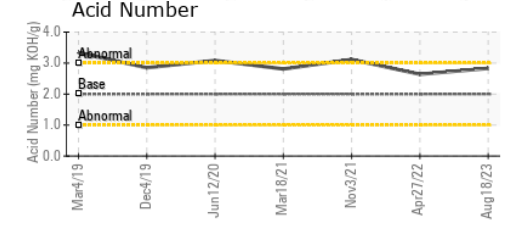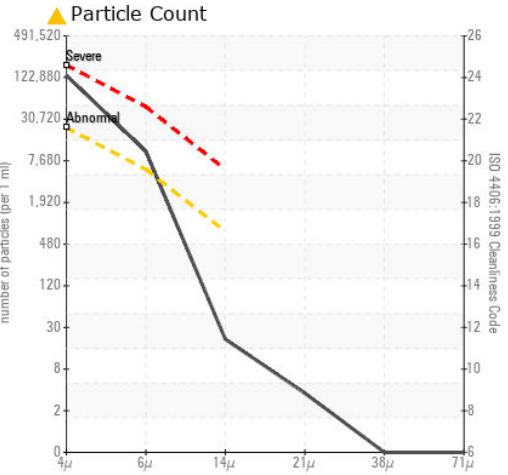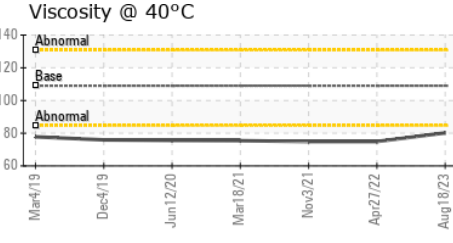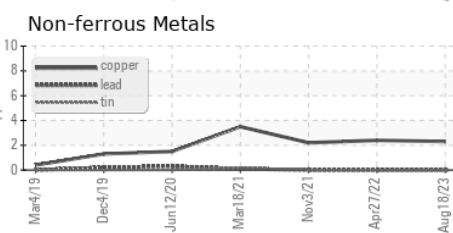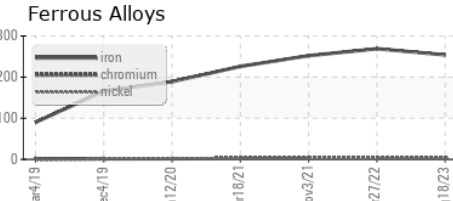

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0843198 **Received** : 28 Aug 2023
Lab Number : 05936666 **Diagnosed** : 29 Aug 2023
Unique Number : 10621937 **Diagnostician** : Angela Borella
Test Package : MOB 2 (Additional Tests: KF, KV100, PrtCount, VI)
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

BASF - GIANNA CREDAROLI
 500 WHITE PLAINS RD
 TARRYTOWN, NY
 US 10591
 Contact: GIANNA CREDAROLI
 gianna.credaroli@basf.com
 T:
 F: