

OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id **1439790 (S/N 7600942)** Component

Compressor Fluid

KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.


ATION hrs hrs hrs ppm ppm ppm ppm ppm ppm ppm ppm ppm pp	Client Info Client Info Client Info Client Info Client Info Client Info ASTM D5185m ASTM D5185m	>3 >3 >2 >10 >10	current KCPA005933 08 Aug 2023 76137 0 N/A NORMAL current 0 <1 0 <1 0 <1 0 <1 0 <1 0 <tr< th=""><th>history1 KCP44382 28 Apr 2022 70073 3000 Changed ATTENTION 0 0 0 0 0 01 0 0 0 0 21 0 21 0 22 0 23 0 24 0 25 0 26 10 27 0 28 00 20 21 02 21 22 30 300 300 300 300 300 300 300 300 300 300 300 300 300</th><th>history2 KCP33667 20 May 2021 65475 0 Changed ABNORMAL D 0 - - - - - - 0 - - - - - - -</th></tr<>	history1 KCP44382 28 Apr 2022 70073 3000 Changed ATTENTION 0 0 0 0 0 01 0 0 0 0 21 0 21 0 22 0 23 0 24 0 25 0 26 10 27 0 28 00 20 21 02 21 22 30 300 300 300 300 300 300 300 300 300 300 300 300 300	history2 KCP33667 20 May 2021 65475 0 Changed ABNORMAL D 0 - - - - - - 0 - - - - - - -
hrs ppm ppm ppm ppm ppm ppm ppm ppm ppm pp	Client Info Client Info Client Info Client Info Client Info ASTM D5185m ASTM D5185m	>50 >10 >3 >2 >10 >10 >50 >10 >50 >10 S0 >10	08 Aug 2023 76137 0 N/A NORMAL Current <1 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	28 Apr 2022 70073 3000 Changed ATTENTION 0 0 0 0 0 0 01 0	20 May 2021 65475 0 Changed ABNORMAL 0 0 0 <1 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
hrs ppm ppm ppm ppm ppm ppm ppm ppm ppm pp	Client Info Client Info Client Info Client Info ASTM D5185m ASTM D5185m	>50 >10 >3 >2 >10 >10 >50 >10 >50 >10 S0 >10	76137 0 N/A NORMAL Current <1 0 0 0 0 0 1 0 0 3 0 0 3 0 0 3 0 0 0 0	70073 3000 Changed ATTENTION 0 0 0 0 0 0 1 2 0 0 2 0 0 2 0 0 0 0 0 0	65475 0 Changed ABNORMAL 0 0 0 <1 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
hrs ppm ppm ppm ppm ppm ppm ppm ppm ppm pp	Client Info Client Info Client Info ASTM D5185m ASTM D5185m	>50 >10 >3 >2 >10 >10 >50 >10 >50 >10 S0 >10	0 N/A NORMAL current <1 0 0 0 0 0 (1 0 0 3 0 0 3 0 0 3 0 0 0 0 0 0 0 0 0 0	3000 Changed ATTENTION 0 0 0 0 0 0 1 0 1 2 0 0 2 0 0 2 0 0 0 0	0 Changed ABNORMAL 0 0 0 3 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	Client Info method ASTM D5185m ASTM D5185m	>50 >10 >3 >2 >10 >10 >50 >10 >50 >10 S0 >10	N/A NORMAL Current <1 0 0 0 0 - - 1 0 3 0 - - 0 0 0 0 - - 0 0 0 - - 0 0 0 - - - 0 0 - - - - - - - - - - - - -	Changed ATTENTION history1 0 0 0 0 0 0 1 1 1 0 2 0 0 2 0 0 2 0 0 0 0	Changed ABNORMAL 0 0 0 3 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m	>50 >10 >3 >2 >10 >10 >50 >10 >50 >10 S0 >10	NORMAL current <1 0 0 0 0 1 0 3 0 3 0 3 0 0 0 0 0 0 0 0 0 0 0 0 0	ATTENTION history1 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	ABNORMAL history2 0 0 1 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m	>50 >10 >3 >2 >10 >10 >50 >10 >50 >10 S0 >10	<1	history1 0 0 0 0 0 <1	history2 0 0
ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m	>50 >10 >3 >2 >10 >10 >50 >10 >50 >10 S0 >10	<1 0 0 0 0 <1 0 3 0 3 0 0 0 0 0 0 0 0 0 0 0 0 0 0	0 0 0 <1 <1 2 0 2 0 0 0 0 0 history1 <1 0	0 0 <1 0 0 0 0 3 0 0 0 0 0 0 0 0 0 0 1 0 0 0 0 0 0 0 0 0 0 0 0 0
ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m	>10 >3 >3 >2 >10 >10 >50 >10 >50 >10 S50 >10 S0 S0 S0 S0 S0 S0 S0 S0 S0 S0 S0 S0 S0	0 0 0 () 0 3 0 3 0 0 0 0 0 0 0 0 0 0 0	0 0 () () () () () () () () () () () () ()	0 <1 0 0 0 0 3 0 0 0 0 0 0 0 0 0 0 0 0 0 0
ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m	>3 >3 >2 >10 >10 >50 >10 >10 	0 0 0 <1 0 3 0 0 0 0 0 0 0 0 0 0 0	0 0 <1 <1 2 0 2 0 0 0 0 0 0 history1 <1 0	<1 0 0 0 0 3 0 0 0 0 0 0 0 0 0 0 0 0 0 0
ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m	>3 >2 >10 >50 >10 >50 >10 Imit/base	0 0 <1 0 3 0 0 0 0 0 0 0 0 0 0 0	0 <1 <1 0 2 0 0 0 0 0 history1 <1 0	0 0 0 3 0 0 0 0 0 0 0 0 0 0 1 0 0 1 0 0 1 1 0
ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m	>2 >10 >50 >10 >10 limit/base 0 90	0 <1 0 3 0 0 0 0 0 0 0 0 0	<1 <1 0 2 0 0 0 0 history1 <1 0	0 0 0 3 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m	>10 >10 >50 >10 !imit/base 0 90	<1 0 3 0 0 0 0 0 Current 0 0 0 0	<1 0 2 0 0 0 0 0 history1 <1 0	0 0 3 0 0 0 0 0 0 0 0 0 0 1 0 0 1 0 0
ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	>10 >50 >10 limit/base 0 90	0 3 0 0 0 0 <u>current</u> 0 0 0	0 2 0 0 0 0 history1 <1 0	0 3 0 0 0 0 0 0 history2 <1 0
ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	>10 >50 >10 limit/base 0 90	0 3 0 0 0 0 <u>current</u> 0 0 0	0 2 0 0 0 0 history1 <1 0	0 3 0 0 0 0 0 0 history2 <1 0
ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	>50 >10 limit/base 0 90	3 0 0 0 0 <u>current</u> 0 0 0	2 0 0 0 0 <u>history1</u> <1 0	3 0 0 0 0 0 0 history2 <1 0
ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m Method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	>10 limit/base 0 90	0 0 0 0 current 0 0 0 0	0 0 0 0 <u>history1</u> <1 0	0 0 0 0 history2 <1 0
ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m Method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	limit/base 0 90	0 0 current 0 0 0	 0 0 history1 <1 0	0 0 0 history2 <1 0
ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m Method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 90	0 0 current 0 0 0	0 0 history1 <1 0	0 0 history2 <1 0
ppm ppm ppm ppm ppm ppm	ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 90	0 current 0 0 0	0 history1 <1 0	0 history2 <1 0
ppm ppm ppm ppm ppm	method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 90	current 0 0 0	history1 <1 0	history2 <1 0
ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 90	0 0 0	<1 0	<1 0
ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m	90	0	0	0
ppm ppm ppm	ASTM D5185m ASTM D5185m		0		
ppm ppm	ASTM D5185m	0	-	0	0
ppm					0
			<1	0	0
	ASTM D5185m	100	0	0	<1
ppm	ASTM D5185m	0	0	0	0
ppm	ASTM D5185m	0	1	3	<1
ppm	ASTM D5185m	0	6	20	0
ppm	ASTM D5185m	23500	23914	16377	16072
5	method	limit/base	current	history1	history2
ppm	ASTM D5185m	>25	<1	<1	0
ppm	ASTM D5185m		<1	0	0
ppm		>20	0	0	<1
%	ASTM D6304	>0.05	0.004	0.002	0.010
ppm	ASTM D6304	>500	48.2	20.1	107.7
IESS	method	limit/base	current	history1	history2
	ASTM D7647		2814	9494	
	ASTM D7647	>1300	618	<u> </u>	
	ASTM D7647	>80	32	1 42	
			9	<u> </u>	
	ASTM D7647	>4	0	4	
		>/17/13	0 19/16/12	▲ 18/14	
	100 4400 (0)				
	()	limit/base	current	historv1	history2
ATION mg KOH/g	method ASTM D8045	limit/base	current 0.55	history1 0.53	history2 0.519
		ESS method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	ESS method limit/base ASTM D7647 >1300 ASTM D7647 >1300 ASTM D7647 >80 ASTM D7647 >20 ASTM D7647 >4 ASTM D7647 >3	ESS method limit/base current ASTM D7647 2814 ASTM D7647 >1300 618 ASTM D7647 >80 32 ASTM D7647 >20 9 ASTM D7647 >4 0 ASTM D7647 >3 0	ESS method limit/base current history1 ASTM D7647 2814 9494 ASTM D7647 >1300 618 2018 ASTM D7647 >80 32 142 ASTM D7647 >20 9 39 ASTM D7647 >4 0 4 ASTM D7647 >3 0 0


Report Id: ONAMIL [WUSCAR] 05936707 (Generated: 08/29/2023 19:15:43) Rev: 1


Contact/Location: Service Manager - ONAMIL



OIL ANALYSIS REPORT

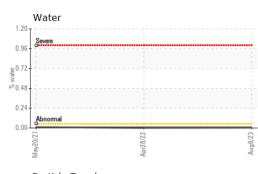



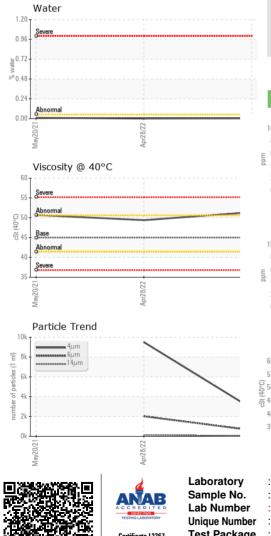

VISUAL		method	limit/base	ourropt	history1	bioton/2
VISUAL		method	iiiiii/base	current	nistory i	history2
White Metal	scalar	*Visual	NONE	LIGHT	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT	🔺 MODER
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	ΓIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45	51.4	49.4	50.7
SAMPLE IMAGES	S	method	limit/base	current	history1	history2
Color						
Bottom						(CARA

