




# PROBLEM SUMMARY

Sample Rating Trend

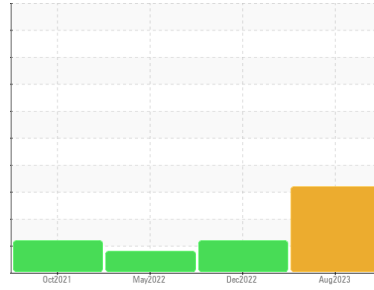



**WATER**



Machine Id  
**7208443 (S/N 1474)**

Component  
**Compressor**  
Fluid  
**KAESER SIGMA (OEM) S-460 (--- GAL)**

## COMPONENT CONDITION SUMMARY

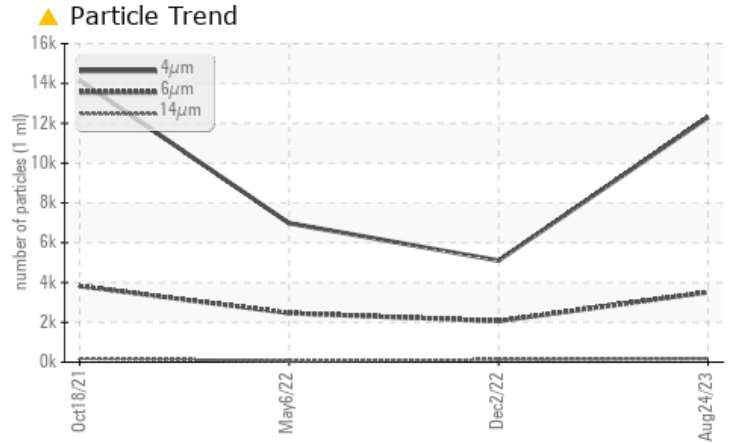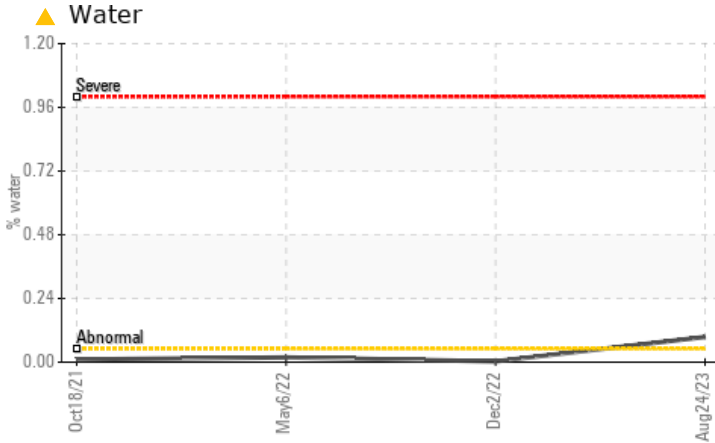

## RECOMMENDATION

The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

## PROBLEMATIC TEST RESULTS

Sample Status				<b>ABNORMAL</b>	ATTENTION	ATTENTION
Water	%	ASTM D6304	>0.05	<b>▲ 0.095</b>	0.003	0.018
ppm Water	ppm	ASTM D6304	>500	<b>▲ 951.8</b>	39.4	184.3
Particles >6µm		ASTM D7647	>1300	<b>▲ 3515</b>	▲ 2066	▲ 2461
Particles >14µm		ASTM D7647	>80	<b>▲ 168</b>	▲ 123	55
Particles >21µm		ASTM D7647	>20	<b>▲ 50</b>	21	7
Oil Cleanliness		ISO 4406 (c)	>--/17/13	<b>▲ 21/19/15</b>	▲ 20/18/14	▲ 20/18/13

Customer Id: ADVAUROH  
Sample No.: KC121446  
Lab Number: 05936745  
Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
Angela Borella +1 800-237-1369  
[angela.borella@wearcheckusa.com](mailto:angela.borella@wearcheckusa.com)

To change component or sample information:  
Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

*There are no recommended actions for this sample.*

## HISTORICAL DIAGNOSIS

### 02 Dec 2022 Diag: Angela Borella

ISO



Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a moderate amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



### 06 May 2022 Diag: Angela Borella

ISO



The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a moderate amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



### 18 Oct 2021 Diag: Jonathan Hester

ISO




Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



# OIL ANALYSIS REPORT

Sample Rating Trend

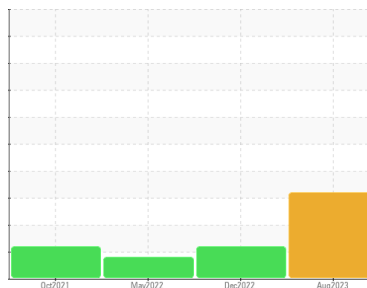

**WATER**



Machine Id  
**7208443 (S/N 1474)**

Component  
**Compressor**  
Fluid  
**KAESER SIGMA (OEM) S-460 (--- GAL)**

## DIAGNOSIS

### ▲ Recommendation

The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### ▲ Contamination

There is a high amount of particulates present in the oil. There is a light concentration of water present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>KC121446</b>	KC107697	KC96223
Sample Date	Client Info			<b>24 Aug 2023</b>	02 Dec 2022	06 May 2022
Machine Age	hrs	Client Info		<b>24375</b>	21029	17723
Oil Age	hrs	Client Info		<b>0</b>	6100	2800
Oil Changed	Client Info			<b>N/A</b>	Changed	Not Chngd
Sample Status				<b>ABNORMAL</b>	ATTENTION	ATTENTION

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<b>&lt;1</b>	<1	<1
Chromium	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Nickel	ppm	ASTM D5185m	>3	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	<1
Lead	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>50	<b>15</b>	22	4
Tin	ppm	ASTM D5185m	>10	<b>0</b>	0	<1
Antimony	ppm	ASTM D5185m		<b>---</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0






ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>0</b>	0	<1
Barium	ppm	ASTM D5185m	90	<b>0</b>	0	38
Molybdenum	ppm	ASTM D5185m		<b>0</b>	0	0
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	1
Magnesium	ppm	ASTM D5185m	90	<b>23</b>	5	57
Calcium	ppm	ASTM D5185m	2	<b>0</b>	0	1
Phosphorus	ppm	ASTM D5185m		<b>2</b>	0	5
Zinc	ppm	ASTM D5185m		<b>14</b>	18	12

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>11</b>	2	2
Sodium	ppm	ASTM D5185m		<b>8</b>	3	10
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	0
Water	%	ASTM D6304	>0.05	<b>▲ 0.095</b>	0.003	0.018
ppm Water	ppm	ASTM D6304	>500	<b>▲ 951.8</b>	39.4	184.3

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		<b>12303</b>	5105	6979
Particles >6µm		ASTM D7647	>1300	<b>▲ 3515</b>	▲ 2066	▲ 2461
Particles >14µm		ASTM D7647	>80	<b>▲ 168</b>	▲ 123	55
Particles >21µm		ASTM D7647	>20	<b>▲ 50</b>	21	7
Particles >38µm		ASTM D7647	>4	<b>5</b>	2	0
Particles >71µm		ASTM D7647	>3	<b>0</b>	0	0
Oil Cleanliness		ISO 4406 (c)	>--/17/13	<b>▲ 21/19/15</b>	▲ 20/18/14	▲ 20/18/13

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	<b>0.33</b>	0.42	0.42


# OIL ANALYSIS REPORT

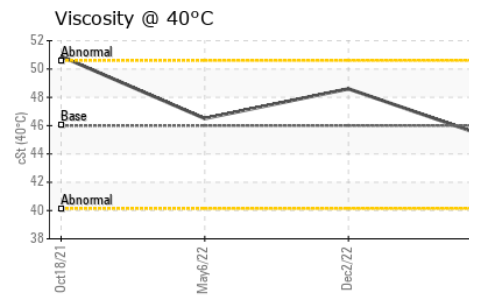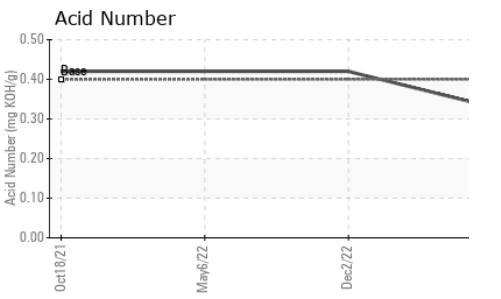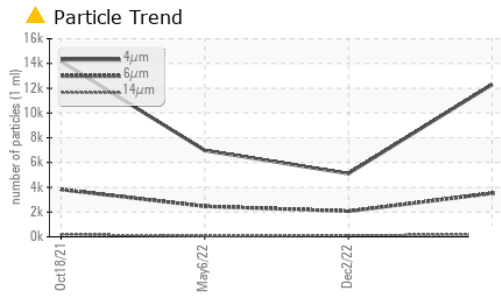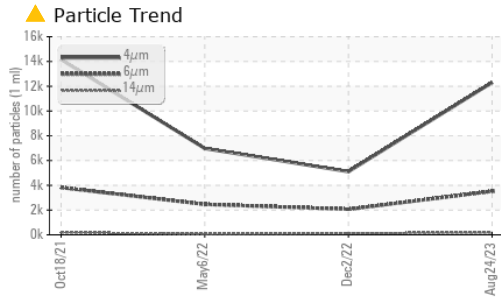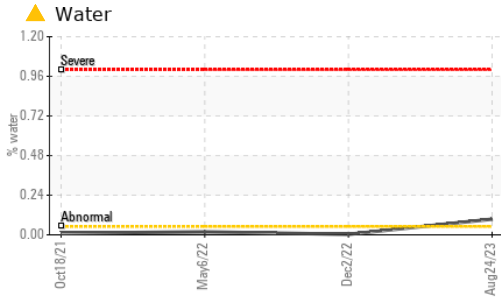





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 46	45.1	48.6	46.5

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

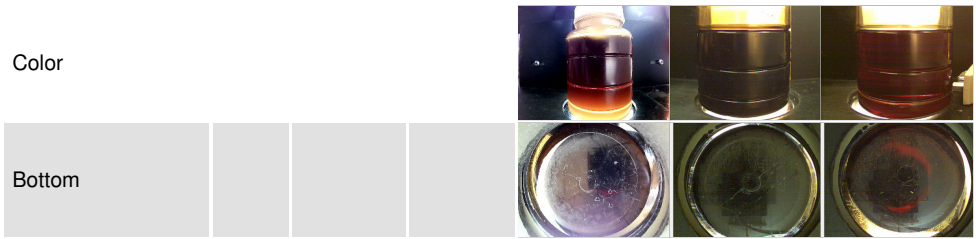

## GRAPHS

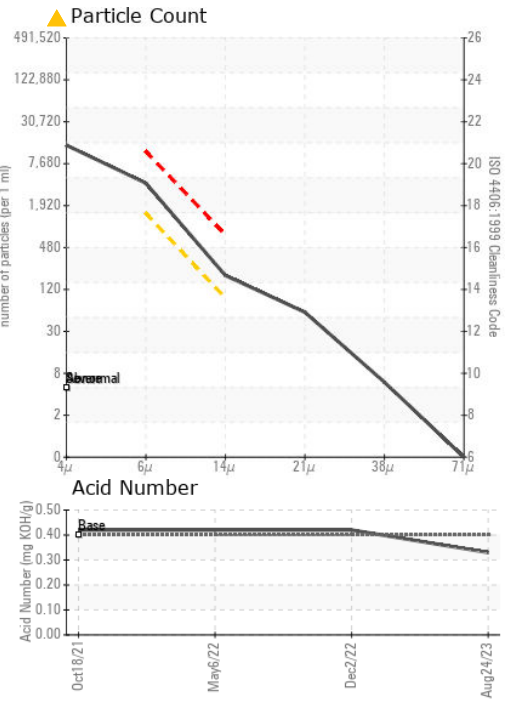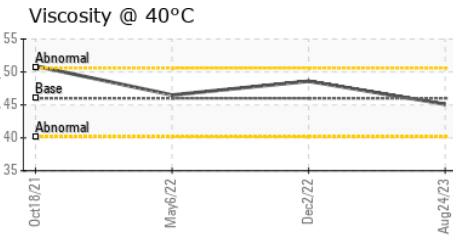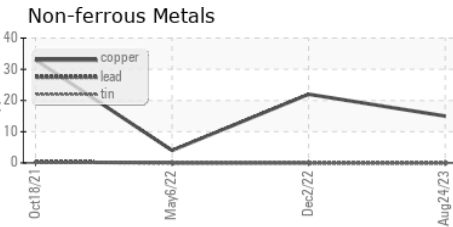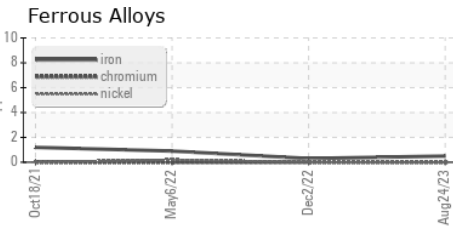

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KC121446 **Received** : 28 Aug 2023  
**Lab Number** : 05936745 **Diagnosed** : 29 Aug 2023  
**Unique Number** : 10622016 **Diagnostician** : Angela Borella  
**Test Package** : IND 2

**ADVANCED INNOVATIVE MFG**  
 116 LENA DR  
 AURORA, OH  
 US 44202  
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: