




# OIL ANALYSIS REPORT

Sample Rating Trend

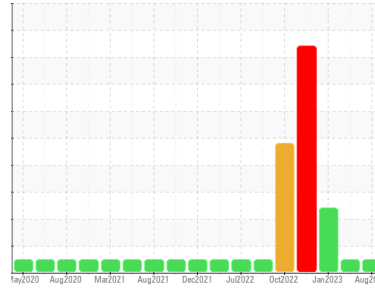

**NORMAL**



Machine Id  
**PETERBILT 96**

Component  
**Diesel Engine**

Fluid  
**DIESEL ENGINE OIL SAE 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>RW0004500</b>	RW0004394	RW0004334
Sample Date	Client Info	<b>12 Aug 2023</b>	03 Jun 2023	30 Jan 2023
Machine Age	hrs	<b>5361</b>	5033	4647
Oil Age	hrs	<b>328</b>	259	247
Oil Changed	Client Info	<b>Changed</b>	Changed	Changed
Sample Status		<b>NORMAL</b>	NORMAL	ABNORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method	<b>NEG</b>	NEG	0.0

## WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >100	<b>14</b>	18	10
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >4	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m	<b>0</b>	<1	0
Silver	ppm	ASTM D5185m >3	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>6</b>	6	2
Lead	ppm	ASTM D5185m >40	<b>0</b>	0	0
Copper	ppm	ASTM D5185m >330	<b>47</b>	35	17
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 250	<b>5</b>	8	<1
Barium	ppm	ASTM D5185m 10	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 100	<b>65</b>	69	79
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 450	<b>1027</b>	964	821
Calcium	ppm	ASTM D5185m 3000	<b>1225</b>	1179	1022
Phosphorus	ppm	ASTM D5185m 1150	<b>1121</b>	1082	954
Zinc	ppm	ASTM D5185m 1350	<b>1420</b>	1334	1100
Sulfur	ppm	ASTM D5185m 4250	<b>3979</b>	3842	2603

## CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >25	<b>4</b>	4	4
Sodium	ppm	ASTM D5185m >158	<b>10</b>	50	▲ 186
Potassium	ppm	ASTM D5185m >20	<b>13</b>	15	▲ 38

## INFRA-RED



method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844 >3	<b>0.4</b>	0.5	0.3
Nitration	Abs/cm	*ASTM D7624 >20	<b>8.4</b>	9.2	7.7
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>19.4</b>	20.3	18.7

## FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>15.2</b>	16.5	14.3
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	<b>11.15</b>	10.11	10.44











# OIL ANALYSIS REPORT

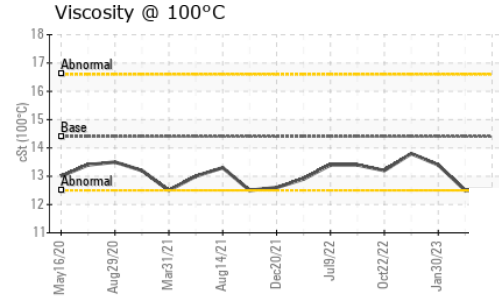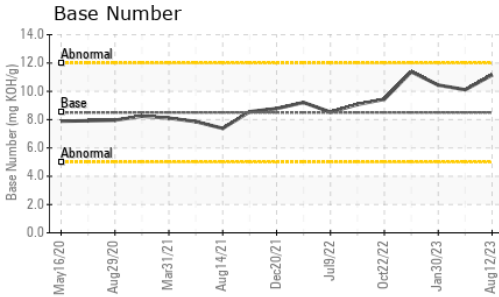

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	<b>LIGHT</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual		<b>NEG</b>	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	<b>12.5</b>	12.5	13.4

## GRAPHS

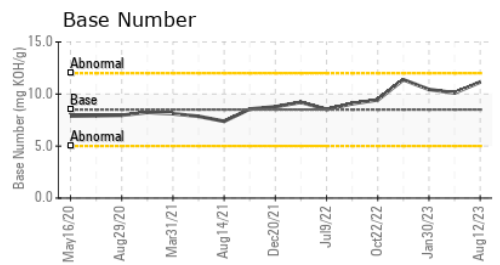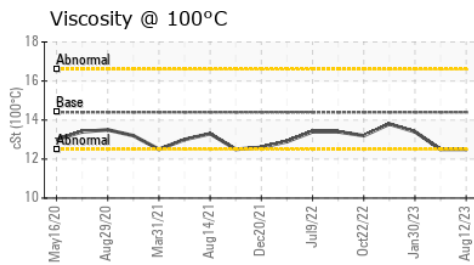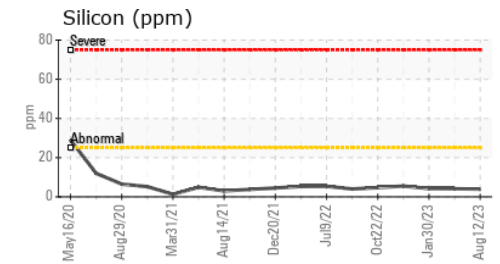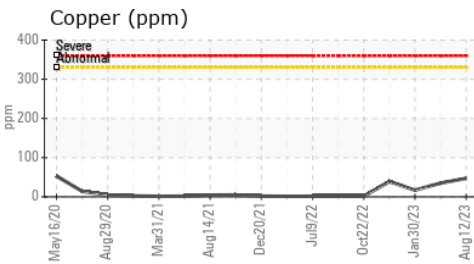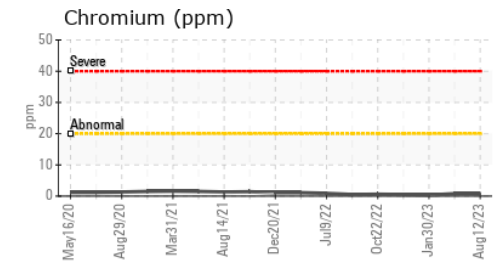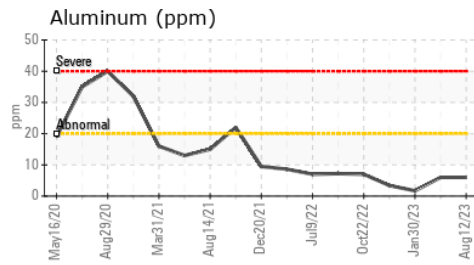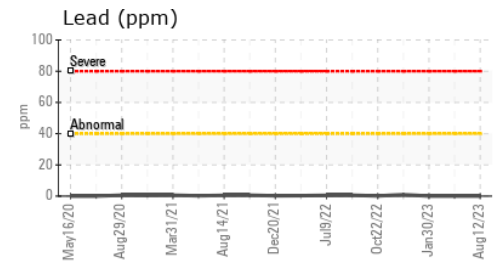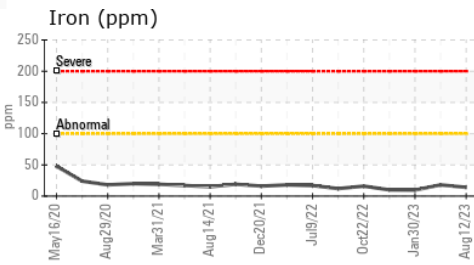

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : RW0004500 **Received** : 28 Aug 2023  
**Lab Number** : 05936818 **Diagnosed** : 29 Aug 2023  
**Unique Number** : 10622089 **Diagnostician** : Wes Davis  
**Test Package** : MOB 2

**HALLACK CONTRACTING, INC.**  
 4223 W POLK  
 HART, MI  
 US 49420  
 Contact: DAN HALLACK KARL BUTCHER  
 shop@hallackcontracting.com  
 T: (231)873-5081  
 F: (231)873-2889

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)