

PROBLEM SUMMARY

Sample Rating Trend

WATER

Machine Id


KAESER BSD 50 6723709 (S/N 2021)

Component

Compressor

KAESER SIGMA (OEM) S-460 (--- QTS)

COMPONENT CONDITION SUMMARY

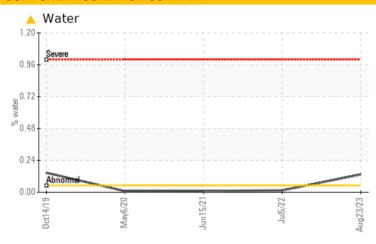

RECOMMENDATION

The filter change at the time of sampling has been noted. We were unable to perform a particle count due to a high concentration of particles present in this sample. We advise that you stop the unit and follow the water drain-off procedure for this component. We recommend an early resample in 500 hours to monitor this condition.

PROBLEMATIC TEST RESULTS									
Sample Status				ABNORMAL	NORMAL	NORMAL			
Water	%	ASTM D6304	>0.05	△ 0.134	0.014	0.010			
ppm Water	ppm	ASTM D6304	>500	1340	144.0	101.4			
Debris	scalar	*Visual	NONE	▲ MODER	NONE	NONE			
Emulsified Water	scalar	*Visual	>0.05	0.2%	NEG	NEG			
Free Water	scalar	*Visual		1.0	NEG	NEG			

Customer Id: SKACOM Sample No.: KC05937248 Lab Number: 05937248 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:

Don Baldridge +1 don.b505@comcast.net

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Alert			?	We were unable to perform a particle count due to a high concentration of particles present in this sample.

HISTORICAL DIAGNOSIS

05 Jul 2022 Diag: Jonathan Hester

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



15 Jun 2021 Diag: Jonathan Hester

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



06 May 2020 Diag: Don Baldridge

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





OIL ANALYSIS REPORT

Sample Rating Trend



WATER

KAESER BSD 50 6723709 (S/N 2021)

Compressor

KAESER SIGMA (OEM) S-460 (--- QTS)

DIAGNOSIS

Recommendation

The filter change at the time of sampling has been noted. We were unable to perform a particle count due to a high concentration of particles present in this sample. We advise that you stop the unit and follow the water drain-off procedure for this component. We recommend an early resample in 500 hours to monitor this condition.

All component wear rates are normal.

Contamination

Moderate concentration of visible dirt/debris present in the oil. There is a light concentration of water present in the oil. Free water present.

Fluid Condition

The AN level is acceptable for this fluid.

		Oct2019	May2020	Jun2021 Jul2022	Aug2023	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KC05937248	KC05592601	KC05291269
Sample Date		Client Info		23 Aug 2023	05 Jul 2022	15 Jun 2021
Machine Age	hrs	Client Info		34126	19988	17052
Oil Age	hrs	Client Info		0	0	9242
Oil Changed		Client Info		N/A	Changed	Changed
Sample Status				ABNORMAL	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<1	0	<1
Chromium	ppm	ASTM D5185m	>10	<1	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	<1	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	0	<1	0
Lead	ppm	ASTM D5185m	>10	<1	0	0
Copper	ppm	ASTM D5185m	>50	8	6	6
Tin	ppm	ASTM D5185m	>10	<1	0	0
Antimony	ppm	ASTM D5185m				0
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		<1	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	13
Barium	ppm	ASTM D5185m	90	0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		<1	0	0
Magnesium	ppm	ASTM D5185m	90	5	0	0
Calcium	ppm	ASTM D5185m	2	0	0	0
Phosphorus	ppm	ASTM D5185m		2	7	4
Zinc	ppm	ASTM D5185m		12	0	0
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	10	5	4
Sodium	ppm	ASTM D5185m		2	<1	<1
Potassium	ppm	ASTM D5185m	>20	2	0	0
Water	%	ASTM D6304	>0.05	△ 0.134	0.014	0.010
ppm Water	ppm	ASTM D6304	>500	1340	144.0	101.4
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647			385	1766
Particles >6µm		ASTM D7647	>1300		174	414
Particles >14µm		ASTM D7647	>80		45	48
Particles >21µm		ASTM D7647	>20		18	19
Particles >38μm		ASTM D7647	>4		4	1
Particles >71µm		ASTM D7647	>3		0	0
Oil Cleanliness		ISO 4406 (c)	>/17/13		16/15/13	16/13
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (ANI)	ma 1/011/a	ACTM DODAE	0.4	0.44	0.40	0.417

0.44

Acid Number (AN)


mg KOH/g ASTM D8045 0.4

0.46

0.417



OIL ANALYSIS REPORT

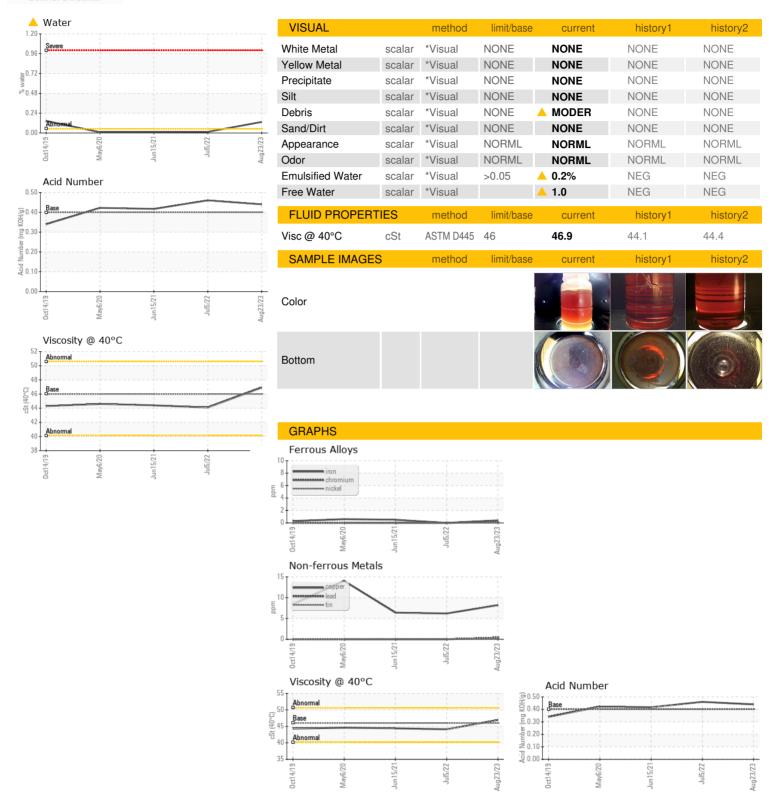





Certificate L2367

Laboratory Sample No. Lab Number **Unique Number** Test Package

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : 05937248

: KC05937248 : 10622519

Received Diagnosed Diagnostician

: 29 Aug 2023 : 30 Aug 2023 : Don Baldridge

SKAPS INDUSTRIES 571 INDUSTRIAL HWY COMMERCE, GA US 30529

Contact:

T: F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

: IND 2

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)