




# PROBLEM SUMMARY

Sample Rating Trend

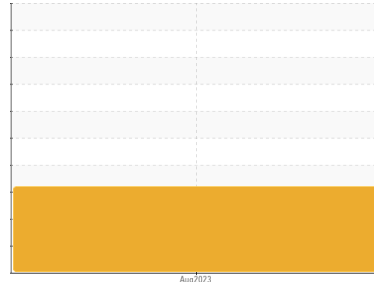


**WATER**



Machine Id  
**KAESER BSD 50 8630685 (S/N 1424)**  
 Component  
**Compressor**  
 Fluid  
**KAESER SIGMA (OEM) M-460 (--- GAL)**

## COMPONENT CONDITION SUMMARY

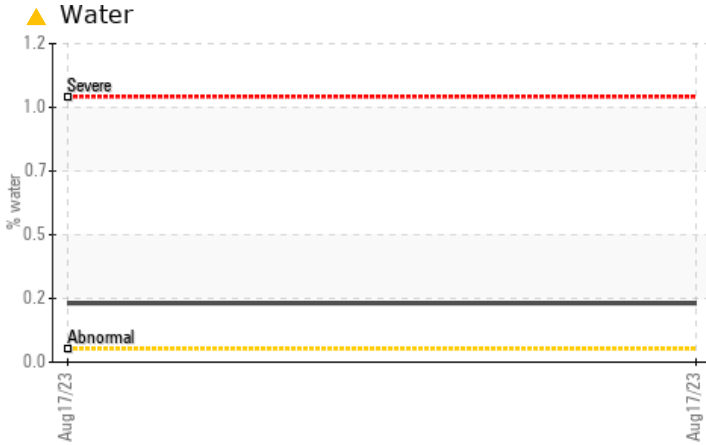

## RECOMMENDATION

The filter change at the time of sampling has been noted. We advise that you stop the unit and follow the water drain-off procedure for this component. We recommend an early resample in 500 hours to monitor this condition.

## PROBLEMATIC TEST RESULTS

Sample Status				<b>ABNORMAL</b>	---	---
Water	%	ASTM D6304	>0.05	<b>▲ 0.222</b>	---	---
ppm Water	ppm	ASTM D6304	>500	<b>▲ 2220</b>	---	---
Free Water	scalar	*Visual		<b>▲ 1.0</b>	---	---

**Customer Id:** ELKFLA  
**Sample No.:** KC05937253  
**Lab Number:** 05937253  
**Test Package:** IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Doug Bogart +1 (800)237-1369 x4016  
[dougb@wearcheckusa.com](mailto:dougb@wearcheckusa.com)

To change component or sample information:  
 Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS


*There are no recommended actions for this sample.*

## HISTORICAL DIAGNOSIS



# OIL ANALYSIS REPORT

Sample Rating Trend

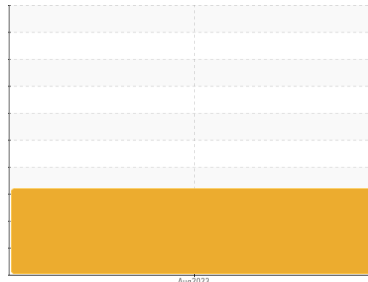

**WATER**



Machine Id  
**KAESER BSD 50 8630685 (S/N 1424)**

Component  
**Compressor**  
 Fluid  
**KAESER SIGMA (OEM) M-460 (--- GAL)**

## DIAGNOSIS

### ▲ Recommendation

The filter change at the time of sampling has been noted. We advise that you stop the unit and follow the water drain-off procedure for this component. We recommend an early resample in 500 hours to monitor this condition.

### Wear

All component wear rates are normal.

### ▲ Contamination

Free water present. There is a light concentration of water present in the oil. The amount and size of particulates present in the system are acceptable.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>KC05937253</b>	---	---
Sample Date	Client Info	<b>17 Aug 2023</b>	---	---
Machine Age	hrs Client Info	<b>2597</b>	---	---
Oil Age	hrs Client Info	<b>0</b>	---	---
Oil Changed	Client Info	<b>N/A</b>	---	---
Sample Status		<b>ABNORMAL</b>	---	---

## WEAR METALS

method	limit/base	current	history1	history2
Iron ppm ASTM D5185m	>50	<b>&lt;1</b>	---	---
Chromium ppm ASTM D5185m	>10	<b>&lt;1</b>	---	---
Nickel ppm ASTM D5185m	>3	<b>0</b>	---	---
Titanium ppm ASTM D5185m	>3	<b>&lt;1</b>	---	---
Silver ppm ASTM D5185m	>2	<b>0</b>	---	---
Aluminum ppm ASTM D5185m	>10	<b>1</b>	---	---
Lead ppm ASTM D5185m	>10	<b>&lt;1</b>	---	---
Copper ppm ASTM D5185m	>50	<b>15</b>	---	---
Tin ppm ASTM D5185m	>10	<b>&lt;1</b>	---	---
Vanadium ppm ASTM D5185m		<b>&lt;1</b>	---	---
Cadmium ppm ASTM D5185m		<b>&lt;1</b>	---	---

## ADDITIVES

method	limit/base	current	history1	history2
Boron ppm ASTM D5185m	0	<b>0</b>	---	---
Barium ppm ASTM D5185m	90	<b>0</b>	---	---
Molybdenum ppm ASTM D5185m	0	<b>0</b>	---	---
Manganese ppm ASTM D5185m		<b>&lt;1</b>	---	---
Magnesium ppm ASTM D5185m	100	<b>9</b>	---	---
Calcium ppm ASTM D5185m	0	<b>0</b>	---	---
Phosphorus ppm ASTM D5185m	0	<b>5</b>	---	---
Zinc ppm ASTM D5185m	0	<b>38</b>	---	---

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon ppm ASTM D5185m	>25	<b>&lt;1</b>	---	---
Sodium ppm ASTM D5185m		<b>2</b>	---	---
Potassium ppm ASTM D5185m	>20	<b>2</b>	---	---
Water % ASTM D6304	>0.05	<b>▲ 0.222</b>	---	---
ppm Water ppm ASTM D6304	>500	<b>▲ 2220</b>	---	---





## FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm ASTM D7647		<b>748</b>	---	---
Particles >6µm ASTM D7647	>1300	<b>408</b>	---	---
Particles >14µm ASTM D7647	>80	<b>69</b>	---	---
Particles >21µm ASTM D7647	>20	<b>23</b>	---	---
Particles >38µm ASTM D7647	>4	<b>4</b>	---	---
Particles >71µm ASTM D7647	>3	<b>0</b>	---	---
Oil Cleanliness ISO 4406 (c)	>--/17/13	<b>17/16/13</b>	---	---

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN) mg KOH/g ASTM D8045	1.0	<b>0.41</b>	---	---


# OIL ANALYSIS REPORT

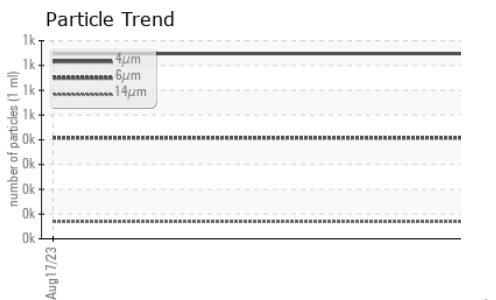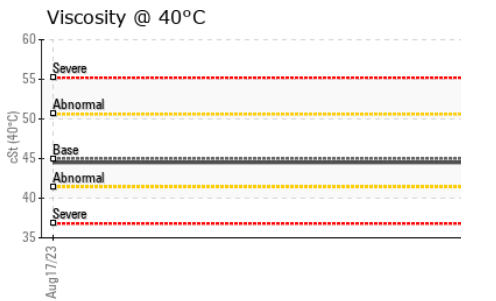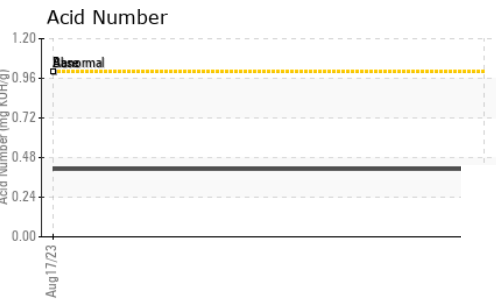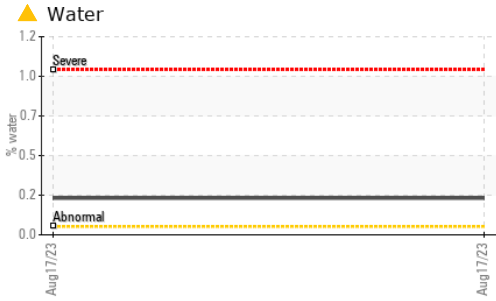






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	<b>LIGHT</b>	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.05	<b>0.2%</b>	---
Free Water	scalar	*Visual		<b>▲ 1.0</b>	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45	<b>44.5</b>	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

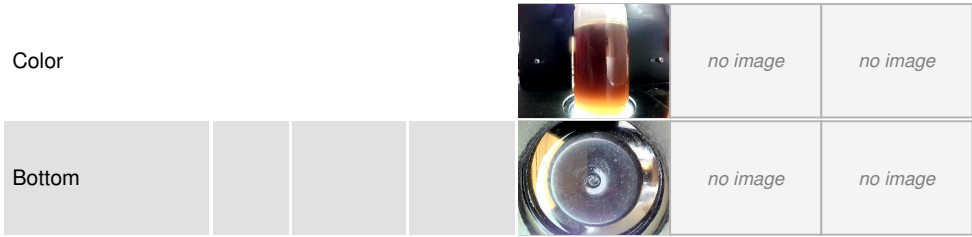

## GRAPHS

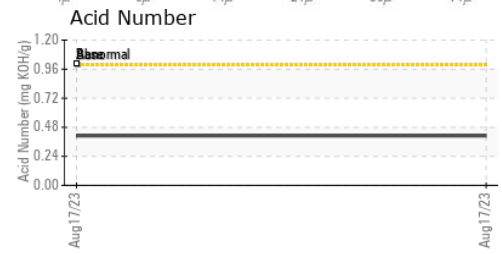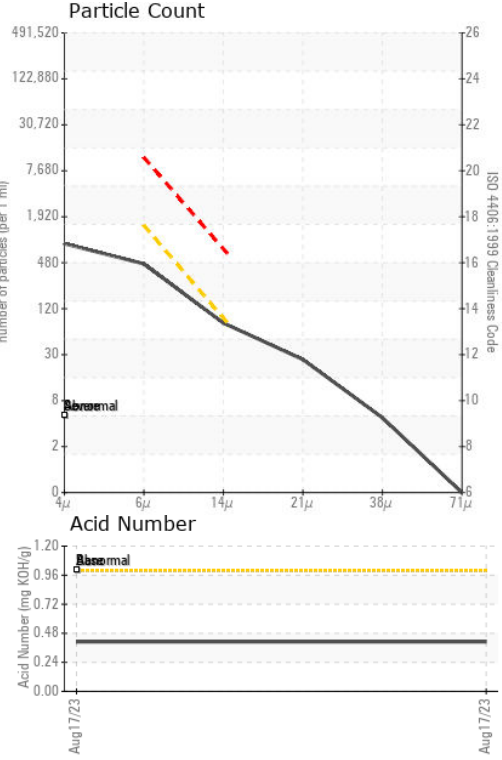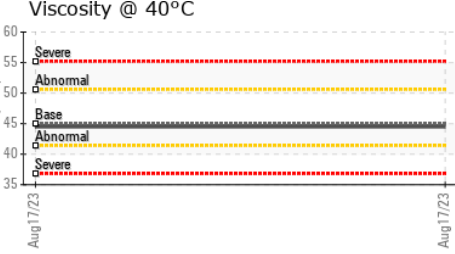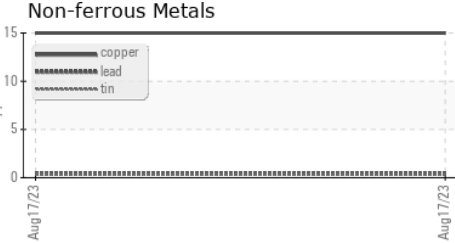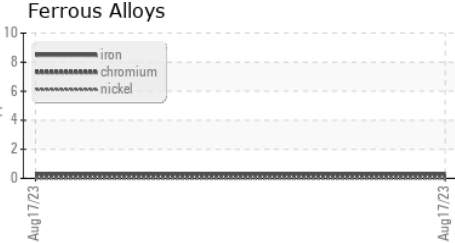

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KC05937253 **Received** : 29 Aug 2023  
**Lab Number** : 05937253 **Diagnosed** : 30 Aug 2023  
**Unique Number** : 10622524 **Diagnostician** : Doug Bogart  
**Test Package** : IND 2

**ELKAMET INC**  
 201 MILLS ST  
 FLAT ROCK, NC  
 US 28726  
 Contact:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)