

OIL ANALYSIS REPORT

Sample Rating Trend



FES SC-5 (S/N 94102035)

Refrigeration Compressor Fluid CAMCO 717 SC (70 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the component. The amount and size of particulates present in the system is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


| | | ام م الحم میں | 1:00:14/10:00:00 | | histow.d | la i a ta mu O |
|------------------|---|---------------|------------------|-------------|-------------|----------------|
| SAMPLE INFORM | VIATION | method | limit/base | | history1 | history2 |
| Sample Number | | Client Info | | WC0814250 | WC0733884 | WC0592563 |
| Sample Date | | Client Info | | 24 Aug 2023 | 10 Sep 2022 | 24 Aug 2021 |
| Machine Age | hrs | Client Info | | 28605 | 22872 | 21268 |
| Oil Age | hrs | Client Info | | 60000 | 22872 | 40000 |
| Oil Changed | | Client Info | | Not Changd | N/A | N/A |
| Sample Status | | | | NORMAL | NORMAL | ABNORMAL |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| Iron | ppm | ASTM D5185m | >8 | 12 | 4 | <1 |
| Chromium | ppm | ASTM D5185m | >2 | <1 | 0 | 0 |
| Nickel | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Titanium | ppm | ASTM D5185m | | <1 | 0 | 0 |
| Silver | ppm | ASTM D5185m | >2 | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m | >3 | 0 | 0 | 0 |
| Lead | ppm | ASTM D5185m | >2 | <1 | 0 | <1 |
| Copper | ppm | ASTM D5185m | >8 | 0 | 0 | <1 |
| Tin | ppm | ASTM D5185m | >4 | <1 | 0 | 0 |
| Antimony | ppm | ASTM D5185m | | | | 0 |
| Vanadium | ppm | ASTM D5185m | | <1 | 0 | 0 |
| Cadmium | ppm | ASTM D5185m | | <1 | 0 | 0 |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Barium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Manganese | ppm | ASTM D5185m | | <1 | 0 | 0 |
| Magnesium | ppm | ASTM D5185m | | 6 | 0 | 0 |
| Calcium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Phosphorus | ppm | ASTM D5185m | | 1 | 2 | 130 |
| Zinc | ppm | ASTM D5185m | | 12 | 0 | 0 |
| Sulfur | ppm | ASTM D5185m | | 0 | 18 | 265 |
| | | | limit/base | | | |
| CONTAMINANTS | | method | limit/base | | history1 | history2 |
| Silicon | ppm | ASTM D5185m | >15 | <1 | 1 | 2 |
| Sodium | ppm | ASTM D5185m | 00 | <1 | 0 | 0 |
| Potassium | ppm | ASTM D5185m | | 2 | 0 | 0 |
| Water Water | % | ASTM D6304 | | 0.001 | 0.003 | 0.005 |
| ppm Water | ppm | ASTM D6304 | | 6.1 | 32.7 | 57.6 |
| FLUID CLEANLIN | NESS | method | limit/base | | history1 | history2 |
| Particles >4µm | | ASTM D7647 | >10000 | 1005 | 1286 | ▲ 234202 |
| Particles >6µm | | ASTM D7647 | | 243 | 165 | ▲ 59522 |
| Particles >14µm | | ASTM D7647 | >320 | 29 | 9 | 4 13 |
| Particles >21µm | | ASTM D7647 | | 9 | 1 | 44 |
| Particles >38µm | | ASTM D7647 | >20 | 0 | 0 | 0 |
| Particles >71µm | | ASTM D7647 | | 0 | 0 | 0 |
| Oil Cleanliness | | ISO 4406 (c) | >20/18/15 | 17/15/12 | 17/15/10 | ▲ 25/23/16 |
| FLUID DEGRADA | ATION | method | limit/base | current | history1 | history2 |
| Acid Number (AN) | mg KOH/g | ASTM D974 | | 0.016 | 0.013 | 0.014 |
| 3:58:40) Rev: 1 | v: 1 Contact/Location: DEREK THALBERG - JENWILM | | | | | |


Report Id: JENWILMN [WUSCAR] 05937297 (Generated: 08/30/2023 13:58:40) Rev: 1


Contact/Location: DEREK THALBERG - JENWILMN




OIL ANALYSIS REPORT

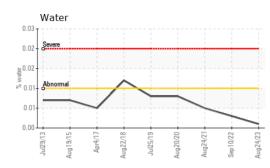

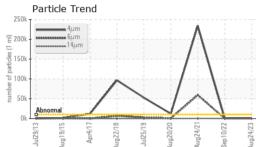

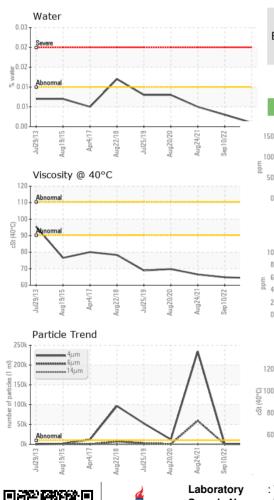

| VISUAL | | method | limit/base | current | history1 | history2 |
|------------------|--------|-----------|------------|---------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.01 | NEG | NEG | NEG |
| Free Water | scalar | *Visual | | NEG | NEG | NEG |
| FLUID PROPERT | IES | method | limit/base | current | history1 | history2 |
| Visc @ 40°C | cSt | ASTM D445 | | 64.3 | 64.8 | 66.5 |
| SAMPLE IMAGES | 3 | method | limit/base | current | history1 | history2 |
| Color | | | | | | T |
| Bottom | | | | | | |

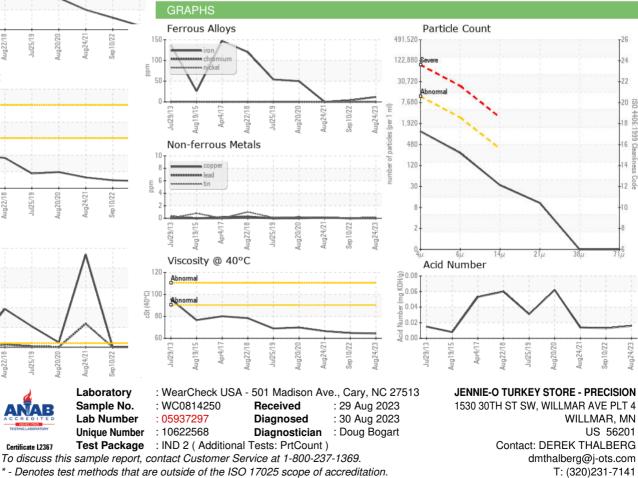

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: DEREK THALBERG - JENWILMN

F: (320)231-7169