



# OIL ANALYSIS REPORT

Sample Rating Trend


**NORMAL**



Machine Id  
**PETERBILT BIGGER 1 (S/N 1NPALUTX17N744336)**

Component  
**Diesel Engine**

Fluid  
**TRC MOLY XL PRO-SPEC IV HD SYN 5W40 (40 QTS)**

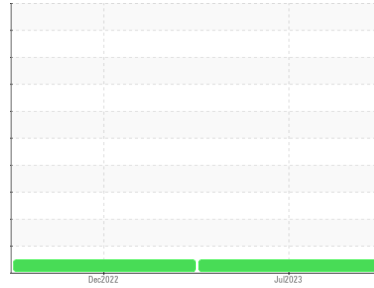

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>TR05937456</b>	TR05737301	---
Sample Date	Client Info		<b>14 Jul 2023</b>	30 Dec 2022	---
Machine Age	mls	Client Info	<b>370201</b>	361423	---
Oil Age	mls	Client Info	<b>25000</b>	17000	---
Oil Changed	Client Info		<b>Not Chngd</b>	Not Chngd	---
Sample Status			<b>NORMAL</b>	NORMAL	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	---
Water	WC Method	>0.2	<b>NEG</b>	NEG	---
Glycol	WC Method		<b>NEG</b>	NEG	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >75	<b>48</b>	36	---
Chromium	ppm	ASTM D5185m >4	<b>1</b>	1	---
Nickel	ppm	ASTM D5185m >5	<b>&lt;1</b>	<1	---
Titanium	ppm	ASTM D5185m >2	<b>0</b>	<1	---
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m >54	<b>3</b>	4	---
Lead	ppm	ASTM D5185m >20	<b>2</b>	2	---
Copper	ppm	ASTM D5185m >240	<b>14</b>	17	---
Tin	ppm	ASTM D5185m >5	<b>0</b>	<1	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>&lt;1</b>	2	---
Barium	ppm	ASTM D5185m	<b>2</b>	0	---
Molybdenum	ppm	ASTM D5185m	<b>157</b>	141	---
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185m	<b>37</b>	53	---
Calcium	ppm	ASTM D5185m 4500	<b>4554</b>	4933	---
Phosphorus	ppm	ASTM D5185m	<b>881</b>	943	---
Zinc	ppm	ASTM D5185m 1200	<b>1059</b>	1138	---
Sulfur	ppm	ASTM D5185m	<b>4141</b>	5074	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >35	<b>11</b>	15	---
Sodium	ppm	ASTM D5185m	<b>0</b>	4	---
Potassium	ppm	ASTM D5185m >20	<b>5</b>	4	---

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.6</b>	0.5	---
Nitration	Abs/cm	*ASTM D7624 >20	<b>11.7</b>	11.6	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>23.2</b>	23.4	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>15.5</b>	15.7	---
Base Number (BN)	mg KOH/g	ASTM D2896 15	<b>13.16</b>	12.83	---











# OIL ANALYSIS REPORT

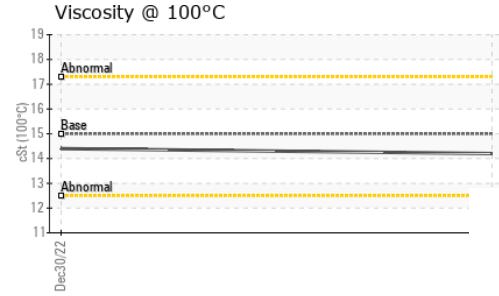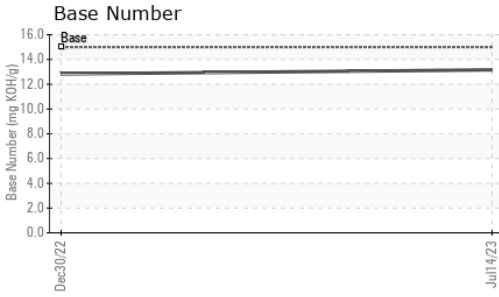

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15	14.2	14.4

### GRAPHS

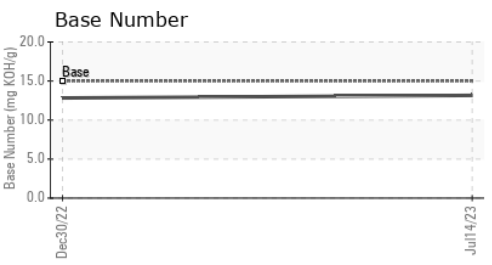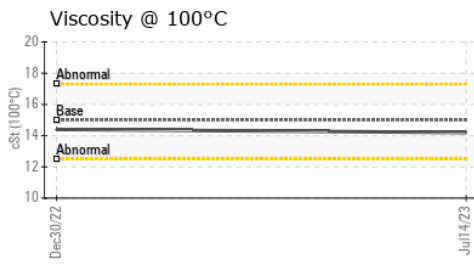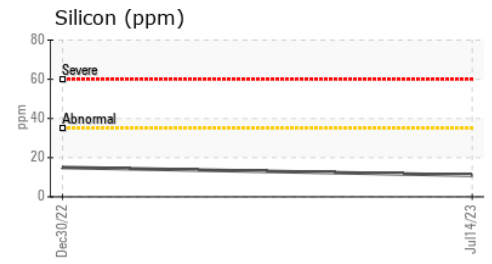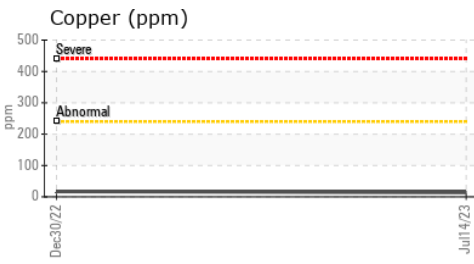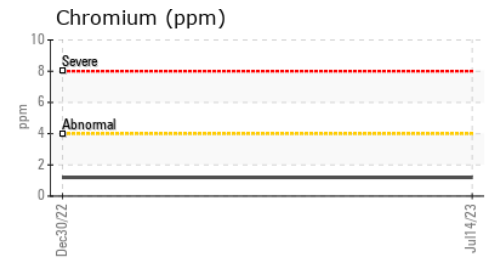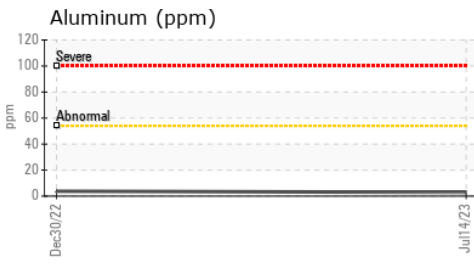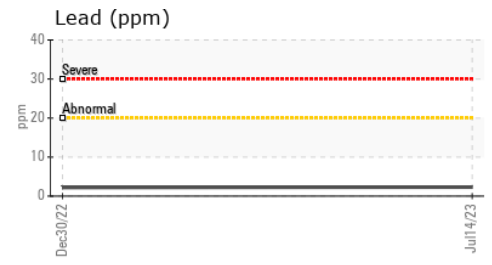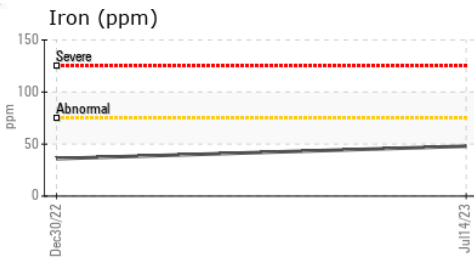

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : TR05937456 **Recieved** : 29 Aug 2023  
**Lab Number** : **05937456** **Diagnosed** : 30 Aug 2023  
**Unique Number** : 10622727 **Diagnostician** : Wes Davis  
**Test Package** : MOB 2

**ROWELL'S SERVICES**  
 359 TILTON RD  
 NORTH FIELD, NH  
 US 03276  
 Contact: DON PERCY

To discuss this sample report, contact Customer Service at 1-800-827-0711.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)