




OIL ANALYSIS REPORT



Area
OKLAHOMA/102/EG - SCRAPER
 Machine Id
76.31L [OKLAHOMA^102^EG - SCRAPER]
 Component
Front Left Final Drive
 Fluid
MOBIL MOBILUBE HD PLUS 85W140 (--- GAL)

Sample Rating Trend

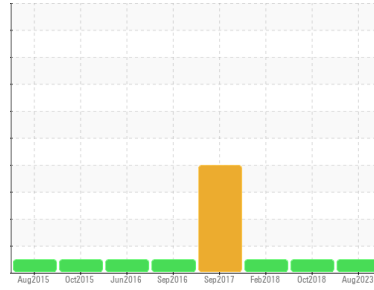

NORMAL



DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0821753	WCCF1010	WCCF0731
Sample Date	Client Info		21 Aug 2023	26 Oct 2018	02 Feb 2018
Machine Age	hrs	Client Info	1885	13051	12990
Oil Age	hrs	Client Info	1000	500	1200
Oil Changed	Client Info		Changed	Changed	Not Changed
Sample Status			NORMAL	NORMAL	NORMAL

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >800	182	41	164
Chromium	ppm	ASTM D5185m >10	<1	0	<1
Nickel	ppm	ASTM D5185m >5	0	0	<1
Titanium	ppm	ASTM D5185m >15	<1	0	<1
Silver	ppm	ASTM D5185m >2	0	0	0
Aluminum	ppm	ASTM D5185m >75	3	<1	<1
Lead	ppm	ASTM D5185m >10	0	2	<1
Copper	ppm	ASTM D5185m >75	4	1	3
Tin	ppm	ASTM D5185m >8	0	0	<1
Antimony	ppm	ASTM D5185m >50	---	0	0
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	180	118	76
Barium	ppm	ASTM D5185m	0	0	<1
Molybdenum	ppm	ASTM D5185m	0	7	1
Manganese	ppm	ASTM D5185m	2	1	1
Magnesium	ppm	ASTM D5185m	10	30	22
Calcium	ppm	ASTM D5185m	543	173	185
Phosphorus	ppm	ASTM D5185m	1064	806	775
Zinc	ppm	ASTM D5185m	230	97	113
Sulfur	ppm	ASTM D5185m	30140	21810	25771

CONTAMINANTS


	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >400	6	1	3
Sodium	ppm	ASTM D5185m	9	2	1
Potassium	ppm	ASTM D5185m >20	0	1	<1

VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual NONE	NONE	NONE	NONE
Silt	scalar	*Visual NONE	NONE	NONE	NONE
Debris	scalar	*Visual NONE	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual NONE	NONE	NONE	NONE
Appearance	scalar	*Visual NORML	NORML	NORML	NORML
Odor	scalar	*Visual NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual >0.2	NEG	NEG	NEG
Free Water	scalar	*Visual	NEG	NEG	NEG






OIL ANALYSIS REPORT

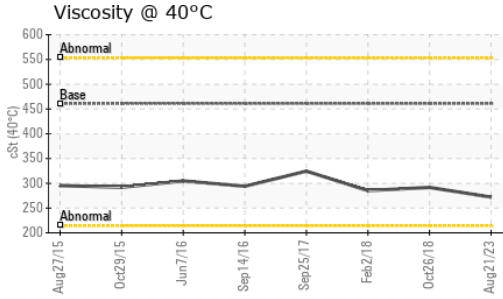

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 461	272	291.7	285.2

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

GRAPHS

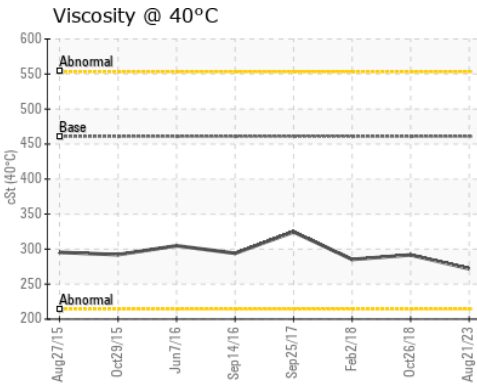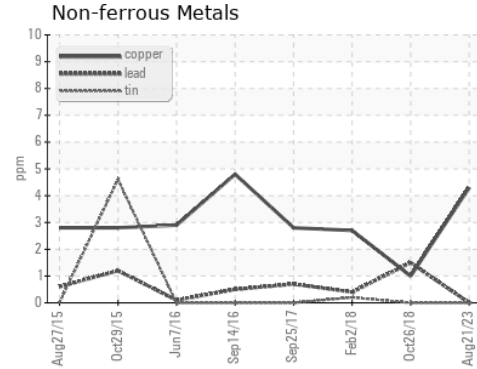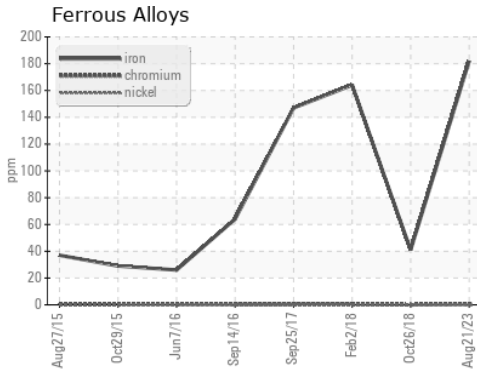

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0821753 **Received** : 29 Aug 2023
Lab Number : 05937623 **Diagnosed** : 30 Aug 2023
Unique Number : 10622894 **Diagnostician** : Don Baldrige
Test Package : CONST

SHERWOOD CONSTRUCTION CO INC
 3219 WEST MAY ST
 WICHITA, KS
 US 67213
 Contact: JIMMY DERAMUS
 jimmy.deramus@sherwood.net
 T: (918)691-3306
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)