




# OIL ANALYSIS REPORT

## Sample Rating Trend

**NORMAL**

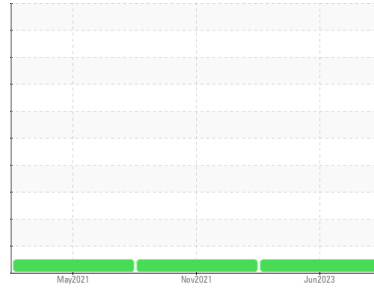

Area  
**[15581]**  
 Machine Id  
**70-13**

Component  
**Diesel Engine**  
 Fluid

**CONOCO PHILLIPS GUARDOL ECT 15W40 (--- GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0793325</b>	WC0601523	WC0548776
Sample Date	Client Info		<b>05 Jun 2023</b>	03 Nov 2021	17 May 2021
Machine Age	hrs	Client Info	<b>2219</b>	1675	1457
Oil Age	hrs	Client Info	<b>544</b>	235	500
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

### CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

### WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>11</b>	9	7
Chromium	ppm	ASTM D5185m >20	<b>0</b>	<1	<1
Nickel	ppm	ASTM D5185m >2	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m >2	<b>0</b>	<1	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	<1	<1
Aluminum	ppm	ASTM D5185m >25	<b>&lt;1</b>	1	<1
Lead	ppm	ASTM D5185m >40	<b>0</b>	0	0
Copper	ppm	ASTM D5185m >330	<b>2</b>	<1	1
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	<1
Antimony	ppm	ASTM D5185m	<b>---</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	<1	<1

### ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 85	<b>42</b>	113	168
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>29</b>	2	1
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 350	<b>923</b>	588	44
Calcium	ppm	ASTM D5185m 1800	<b>1368</b>	1489	2059
Phosphorus	ppm	ASTM D5185m 1000	<b>1062</b>	1050	927
Zinc	ppm	ASTM D5185m 1100	<b>1323</b>	1202	1019
Sulfur	ppm	ASTM D5185m 3500	<b>4258</b>	3133	3085

### CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>5</b>	6	2
Sodium	ppm	ASTM D5185m	<b>9</b>	3	2
Potassium	ppm	ASTM D5185m >20	<b>13</b>	3	6

### INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.1</b>	0.1	0.1
Nitration	Abs/cm	*ASTM D7624 >20	<b>6.7</b>	7.2	6.8
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>18.2</b>	19.5	21.3

### FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>12.7</b>	13.3	17.5
Base Number (BN)	mg KOH/g	ASTM D2896 9.5	<b>8.8</b>	9.1	---







# OIL ANALYSIS REPORT

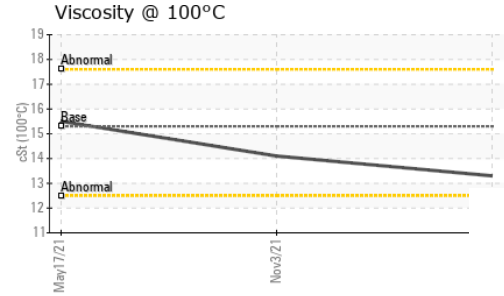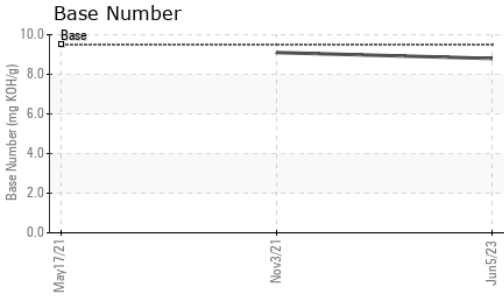

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.3	<b>13.3</b>	14.1	15.5

## GRAPHS

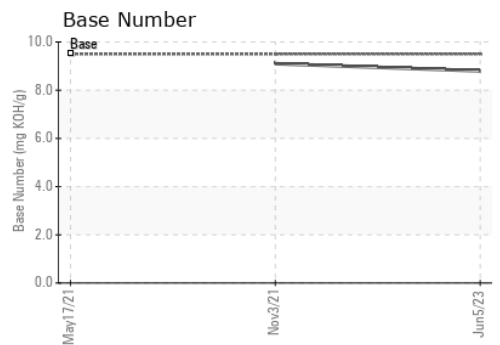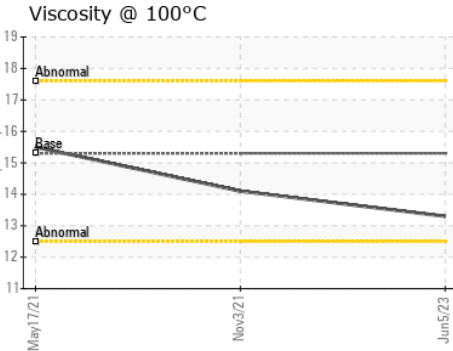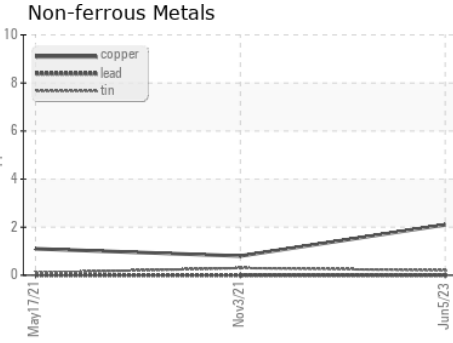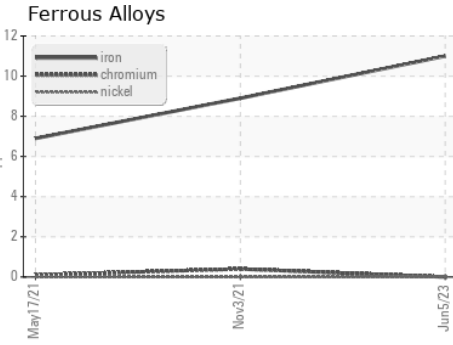

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0793325 **Received** : 29 Aug 2023  
**Lab Number** : **05937806** **Diagnosed** : 30 Aug 2023  
**Unique Number** : 10628418 **Diagnostician** : Wes Davis  
**Test Package** : CONST ( Additional Tests: TBN )

**MANHATTAN ROAD AND BRIDGE**  
 5601 S 122ND E AVE  
 TULSA, OK  
 US 74146  
 Contact: BEN CALDWELL  
 kevin.marson@wearcheck.com  
 T: (918)728-5749  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)