


Sample Rating Trend ISO

## COMPONENT CONDITION SUMMARY

Area [17025]

**Hydraulic System** 

30-69 Component

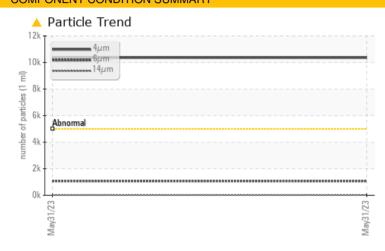

CONOCO PHILLIPS GUARDOL ECT 15W40 (--- GAL)

#### RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS									
Sample Status			ABNORMAL						
Particles >4µm	ASTM D7647	>5000	<u> </u>						
Oil Cleanliness	ISO 4406 (c)	>19/17/14	<b>A</b> 21/17/12						

Customer Id: MANTUL Sample No.: WC0802428 Lab Number: 05937819 Test Package: CONST



To manage this report scan the QR code

*To discuss the diagnosis or test data:* Don Baldridge +1 <u>don.b505@comcast.net</u>


To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS



## **OIL ANALYSIS REPORT**

Sample Rating Trend





30-69 Component

Area [17025]

Hydraulic System

CONOCO PHILLIPS GUARDOL ECT 15W40 (--- GAL)

### DIAGNOSIS

#### A Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is a high amount of silt (particulates < 6 microns in size) present in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	<b>IATION</b>	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0802428		
Sample Date		Client Info		31 May 2023		
Machine Age	hrs	Client Info		3634		
Oil Age	hrs	Client Info		3634		
Oil Changed		Client Info		Not Changd		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	5		
Chromium	ppm	ASTM D5185m	>10	<1		
Nickel	ppm	ASTM D5185m	>10	0		
Titanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>10	4		
Lead	ppm	ASTM D5185m	>10	<1		
Copper	ppm	ASTM D5185m		6		
Tin	ppm	ASTM D5185m	>10	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
	221					
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	85	111		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		10		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m	350	629		
Calcium	ppm	ASTM D5185m	1800	1734		
Phosphorus	ppm	ASTM D5185m	1000	1095		
Zinc	ppm	ASTM D5185m	1100	1261		
Sulfur	ppm	ASTM D5185m	3500	5217		
CONTAMINANTS	i	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	6		
Sodium	ppm	ASTM D5185m		3		
Potassium	ppm	ASTM D5185m	>20	1		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	<b>10358</b>		
Particles >6µm		ASTM D7647		1072		
Particles >14µm		ASTM D7647	>160	27		
Particles >21µm		ASTM D7647	>40	7		
Particles >38µm		ASTM D7647	>10	0		
Particles >71µm		ASTM D7647		0		
Oil Cleanliness		ISO 4406 (c)	>19/17/14	<u> </u>		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
				1.98		
Acid Number (AN)	mg KOH/g	ASTM D8045		1.30		

Report Id: MANTUL [WUSCAR] 05937819 (Generated: 08/31/2023 10:50:15) Rev: 1



12

.10

8

6

4

2

0

12

Ê<sup>10)</sup>

number of particles (1 8

61 4

2 0

2

(B/HO) ber (mg

-B 0.5

0.0

130

120


cSt (40°C)

90

8 70

umber of particles (1 ml)

# **OIL ANALYSIS REPORT**

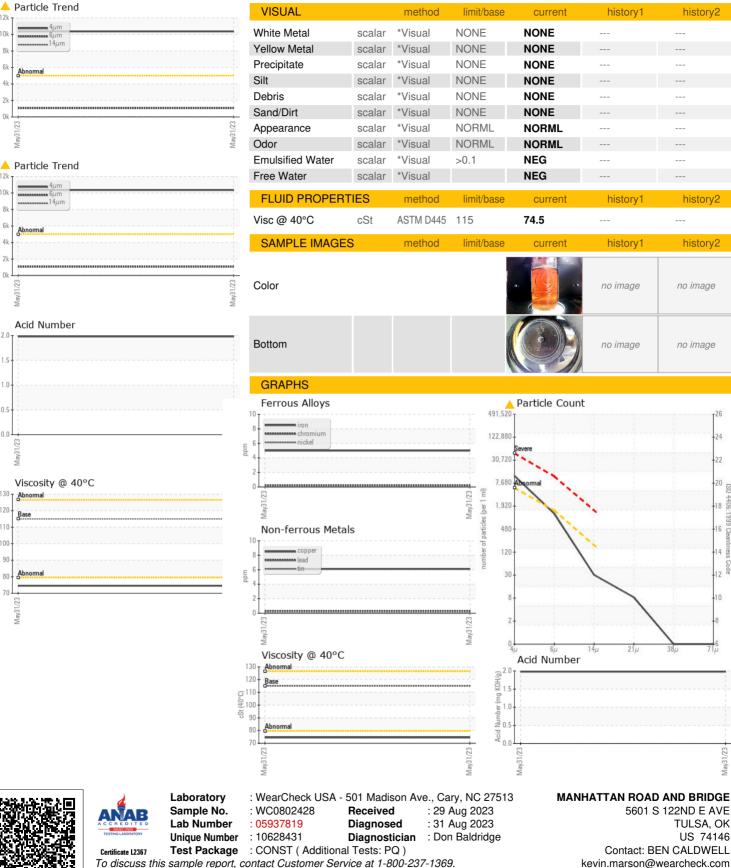

To discuss this sample report, contact Customer Service at 1-800-237-1369. \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Submitted By: JAMES STEELMON

21µ

Page 4 of 4

TULSA, OK

US 74146

F:

T: (918)728-5749

5601 S 122ND E AVE

history2

history2

history2

no image

no imade

4406

:1999 Cle

14