

# **OIL ANALYSIS REPORT**

# DICK LAVY DICK LAVY 4956

Component

**Front Differential** 

NOT GIVEN (--- GAL)

# Sample Rating Trend



### **DIAGNOSIS**

### Recommendation

The oil is near the end of it's useful service life. recommend schedule an oil change. Resample at the next service interval to monitor.

All component wear rates are normal.

### Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

### Fluid Condition

The AN level is at the top-end of the recommended limit.

				Jul2023		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0843212		
Sample Date		Client Info		28 Jul 2023		
Machine Age	mls	Client Info		456		
Oil Age	mls	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>500	42		
Chromium	ppm	ASTM D5185m	>10	<1		
Nickel	ppm	ASTM D5185m	>10	0		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>25	3		
Lead	ppm	ASTM D5185m	>25	0		
Copper	ppm	ASTM D5185m	>100	0		
Tin	ppm	ASTM D5185m	>10	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		186		
Barium	ppm	ASTM D5185m		<1		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		10		
Magnesium	ppm	ASTM D5185m		<1		
Calcium	ppm	ASTM D5185m		13		
Phosphorus	ppm	ASTM D5185m		1095		
Zinc	ppm	ASTM D5185m		2		
Sulfur	ppm	ASTM D5185m		29626		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>75	15		
Sodium	ppm	ASTM D5185m		3		
Potassium	ppm	ASTM D5185m	>20	1		
Water	%	ASTM D6304	>.2	0.068		
ppm Water	ppm	ASTM D6304	>2000	685.2		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4μm		ASTM D7647	>20000	<u>202426</u>		
Particles >6µm		ASTM D7647	>5000	<b>△</b> 62913		
Particles >14μm		ASTM D7647	>640	623		
Particles >21µm		ASTM D7647	>160	39		
Particles >38µm		ASTM D7647	>40	1		
Particles >71µm		ASTM D7647	>10	0		
Oil Cleanliness		ISO 4406 (c)	>21/19/16	<u>\$\text{\scale}\$ 25/23/16</u>		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	ma K∩⊔/a	ACTM DODAE		A 3.40		


Acid Number (AN)

mg KOH/g ASTM D8045

**3.40** 



## **OIL ANALYSIS REPORT**

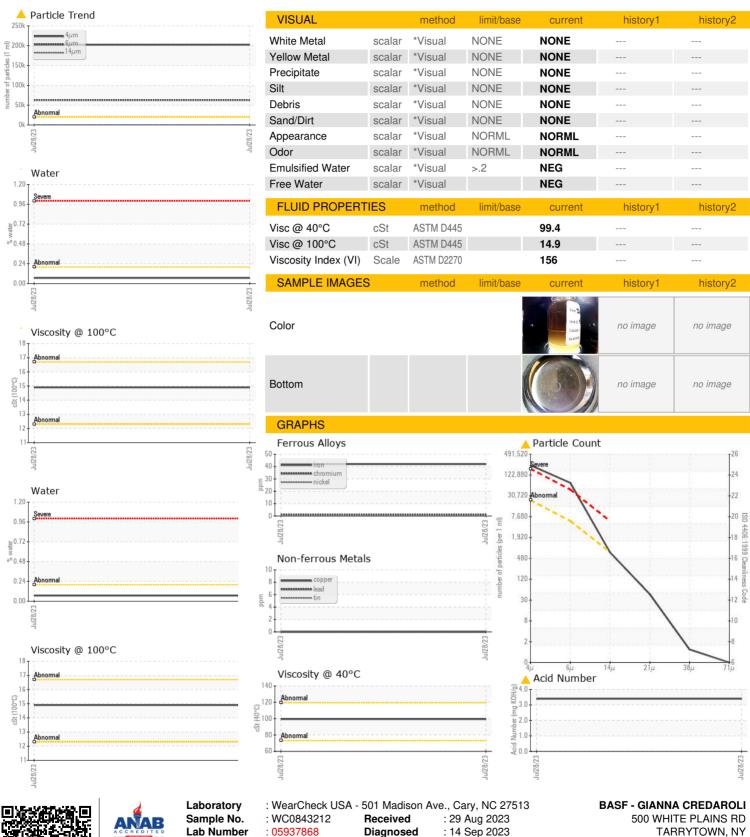



Certificate L2367

Lab Number **Unique Number** 

: 05937868 : 10628480 Test Package

Diagnosed

Diagnostician : Doug Bogart : MOB 2 ( Additional Tests: KF, KV100, PrtCount, VI )

To discuss this sample report, contact Customer Service at 1-800-237-1369. \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

TARRYTOWN, NY US 10591

Contact: GIANNA CREDAROLI

gianna.credaroli@basf.com T:

F: