




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Machine Id
JOHN DEERE 670D 256 (S/N DW670DX614444)
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 15W40 (28 QTS)

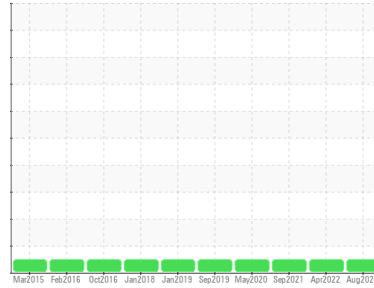

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		RW0004476	RW0002578	RW0002183
Sample Date	Client Info		16 Aug 2023	07 Apr 2022	14 Sep 2021
Machine Age	hrs	Client Info	5666	5485	5280
Oil Age	hrs	Client Info	181	205	238
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>2.1	<1.0	<1.0	<1.0
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>51	9	6	7
Chromium	ppm	ASTM D5185m	>11	<1	<1	<1
Nickel	ppm	ASTM D5185m	>5	0	0	0
Titanium	ppm	ASTM D5185m		0	<1	<1
Silver	ppm	ASTM D5185m	>3	0	5	<1
Aluminum	ppm	ASTM D5185m	>31	2	<1	2
Lead	ppm	ASTM D5185m	>26	0	1	<1
Copper	ppm	ASTM D5185m	>26	<1	1	<1
Tin	ppm	ASTM D5185m	>4	<1	<1	<1
Antimony	ppm	ASTM D5185m		---	---	0
Vanadium	ppm	ASTM D5185m		0	<1	0
Cadmium	ppm	ASTM D5185m		0	<1	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	250	8	8	11
Barium	ppm	ASTM D5185m	10	0	0	0
Molybdenum	ppm	ASTM D5185m	100	61	58	64
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	450	1025	992	940
Calcium	ppm	ASTM D5185m	3000	1198	1066	1076
Phosphorus	ppm	ASTM D5185m	1150	1143	1065	1019
Zinc	ppm	ASTM D5185m	1350	1417	1170	1140
Sulfur	ppm	ASTM D5185m	4250	4180	2936	2864

CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>22	3	2	2
Sodium	ppm	ASTM D5185m	>158	1	2	4
Potassium	ppm	ASTM D5185m	>20	1	0	1

INFRA-RED



	method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	>3	0.3	0.3	0.4
Nitration	Abs/cm	*ASTM D7624	>20	5.7	6.1	5.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	17.8	19.3	18.3

FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	13.3	14.4	13.6
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	10.25	9.20	8.70











OIL ANALYSIS REPORT

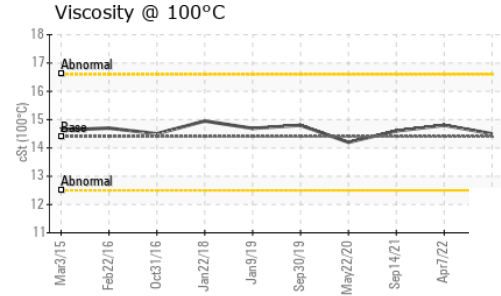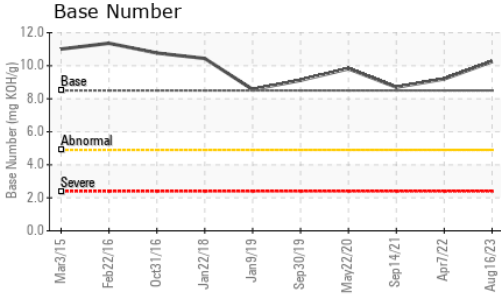

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.21	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	14.5	14.8	14.6

GRAPHS

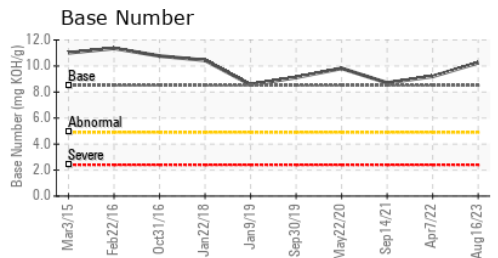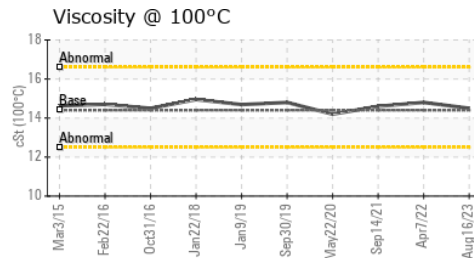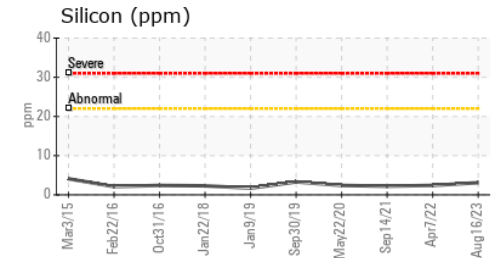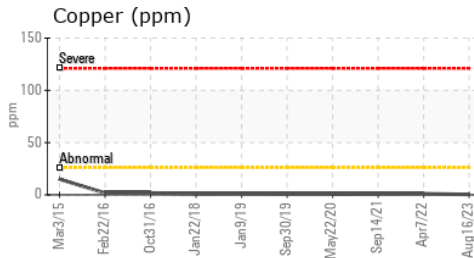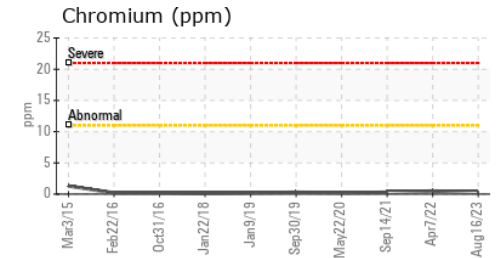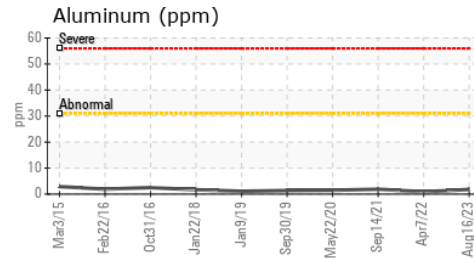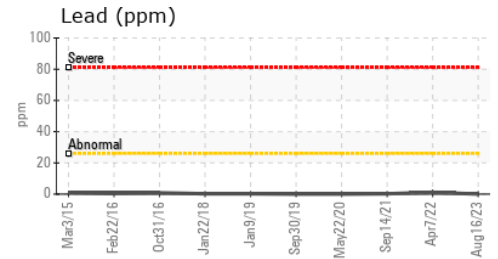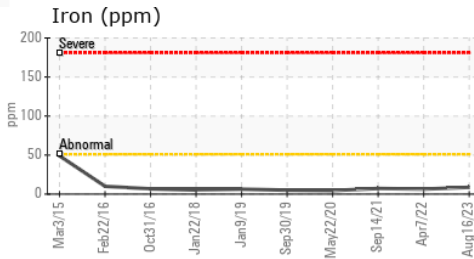

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : RW0004476 Received : 29 Aug 2023
 Lab Number : 05937973 Diagnosed : 30 Aug 2023
 Unique Number : 10628585 Diagnostician : Wes Davis
 Test Package : MOB 2

CITY OF FARMINGTON HILLS
 27245 HALSTED RD
 FARMINGTON HILLS, MI
 US 48331
 Contact: JERRY BROCK
 jbrock@fhgov.com
 T: (248)871-2850
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)