




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

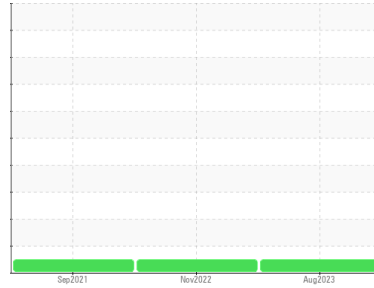

Area
[18829]
Machine Id
40-165

Component
Left Final Drive
Fluid

CONOCO PHILLIPS GUARDOL ECT 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0802352	WC0754763	WC0549081
Sample Date	Client Info		17 Aug 2023	29 Nov 2022	07 Sep 2021
Machine Age	hrs	Client Info	3543	3065	2550
Oil Age	hrs	Client Info	993	1065	495
Oil Changed	Client Info		Not Chngd	Not Chngd	Changed
Sample Status			NORMAL	NORMAL	NORMAL

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >500	35	174	56
Chromium	ppm	ASTM D5185m >10	1	5	2
Nickel	ppm	ASTM D5185m >10	0	1	<1
Titanium	ppm	ASTM D5185m	<1	1	<1
Silver	ppm	ASTM D5185m	0	0	<1
Aluminum	ppm	ASTM D5185m >25	4	14	<1
Lead	ppm	ASTM D5185m >25	0	2	<1
Copper	ppm	ASTM D5185m >50	<1	6	4
Tin	ppm	ASTM D5185m >10	<1	<1	0
Antimony	ppm	ASTM D5185m >5	---	---	0
Vanadium	ppm	ASTM D5185m	0	<1	<1
Cadmium	ppm	ASTM D5185m	0	<1	<1

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 85	121	145	152
Barium	ppm	ASTM D5185m	0	<1	<1
Molybdenum	ppm	ASTM D5185m	32	55	51
Manganese	ppm	ASTM D5185m	<1	2	<1
Magnesium	ppm	ASTM D5185m 350	494	375	344
Calcium	ppm	ASTM D5185m 1800	1754	2029	1919
Phosphorus	ppm	ASTM D5185m 1000	1128	1082	1031
Zinc	ppm	ASTM D5185m 1100	1337	1309	1140
Sulfur	ppm	ASTM D5185m 3500	6090	4927	3856

CONTAMINANTS


	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >75	14	53	16
Sodium	ppm	ASTM D5185m	2	2	3
Potassium	ppm	ASTM D5185m >20	3	5	<1

VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	NONE	LIGHT	NONE
Yellow Metal	scalar	*Visual NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual NONE	NONE	NONE	NONE
Silt	scalar	*Visual NONE	NONE	VLITE	NONE
Debris	scalar	*Visual NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual NONE	NONE	NONE	NONE
Appearance	scalar	*Visual NORML	NORML	NORML	NORML
Odor	scalar	*Visual NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual >0.2	NEG	NEG	NEG
Free Water	scalar	*Visual	NEG	NEG	NEG



OIL ANALYSIS REPORT



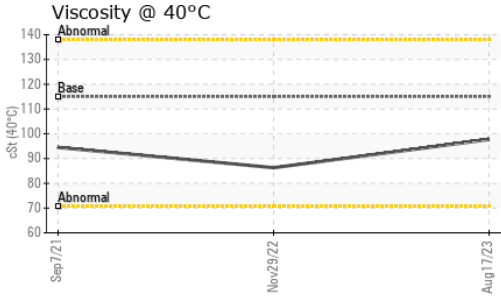


FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	115	97.7	86.3	94.5

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image	no image
Bottom				no image	no image	no image

GRAPHS

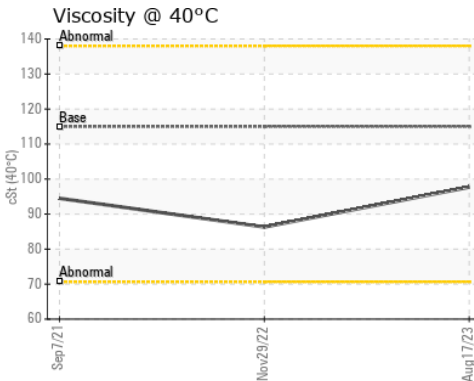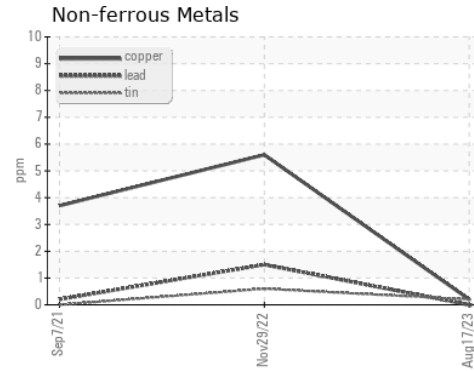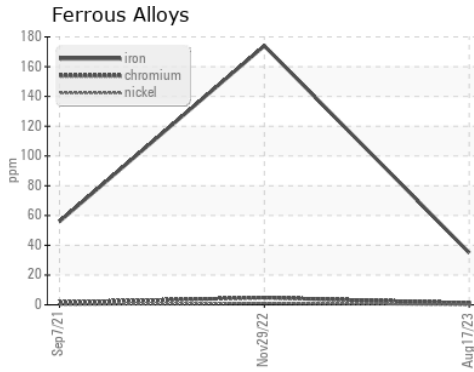

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0802352 **Received** : 29 Aug 2023
Lab Number : **05938002** **Diagnosed** : 31 Aug 2023
Unique Number : 10628614 **Diagnostician** : Don Baldrige
Test Package : CONST

MANHATTAN ROAD AND BRIDGE
 5601 S 122ND E AVE
 TULSA, OK
 US 74146
 Contact: BEN CALDWELL
 kevin.marson@wearcheck.com
 T: (918)728-5749
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)