

# **OIL ANALYSIS REPORT**

## Area Extrusion Machine Id Press 3 Press Hydraulic Unit (S/N 84356)

Component Hydraulic System Fluid

AW HYDRAULIC OIL ISO 46 (3962 GAL)

#### DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

#### Wear

All component wear rates are normal.

#### Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The water content is negligible. The system and fluid cleanliness is acceptable.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



Sample Rating Trend

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		RP0024726	RP0024731	RP0029961
Sample Date		Client Info		25 Aug 2023	30 Jun 2023	23 Mar 2023
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	ATTENTION
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	1	<1	<1
Chromium	ppm	ASTM D5185m	>20	0	0	0
Nickel	ppm	ASTM D5185m	>20	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>20	<1	<1	<1
Lead	ppm	ASTM D5185m	>20	2	<1	0
Copper	ppm	ASTM D5185m	>20	11	7	8
Tin	ppm	ASTM D5185m	>20	<1	<1	0
Vanadium	ppm	ASTM D5185m		0	<1	0
Cadmium	ppm	ASTM D5185m		0	<1	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	5	3	0	0
Barium	ppm	ASTM D5185m	5	2	<1	0
Molybdenum	ppm	ASTM D5185m	5	8	0	0
Manganese	ppm	ASTM D5185m		0	0	<1
Magnesium	ppm	ASTM D5185m	25	12	2	0
Calcium	ppm	ASTM D5185m	200	79	36	9
Phosphorus	ppm	ASTM D5185m	300	342	345	355
Zinc	ppm	ASTM D5185m	370	454	407	390
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	0	<1	3
Sodium	ppm	ASTM D5185m		0	<1	0
Potassium	ppm	ASTM D5185m	>20	2	1	0
Water	%	ASTM D6304	>0.05	0.001	0.003	0.004
ppm Water	ppm	ASTM D6304	>500	4.2	39.5	46.9
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	985	1263	6437
Particles >6µm		ASTM D7647	>1300	134	231	<b>1</b> 934
Particles >14µm		ASTM D7647	>160	19	27	<b>2</b> 56
Particles >21µm		ASTM D7647	>40	8	11	<mark>▲</mark> 93
Particles >38µm		ASTM D7647	>10	0	1	6
Particles >71µm		ASTM D7647	>3	0	0	1
Oil Cleanliness		ISO 4406 (c)	>19/17/14	17/14/11	17/15/12	<b>2</b> 0/18/15
FLUID DEGRADA	TION	method	limit/base	current	history1	history2

Acid Number (AN) mg KOH/g ASTM D8045 0.57


0.54


0.36


0.41



# **OIL ANALYSIS REPORT**

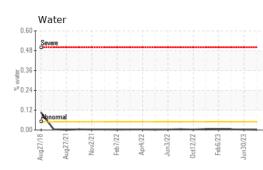

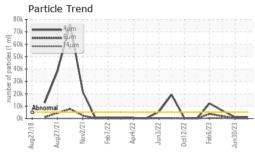

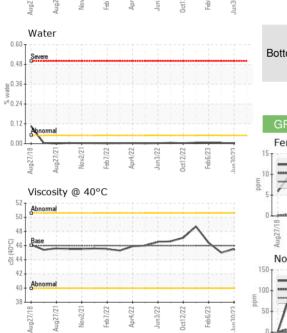

80

70

sajothed 40k

1 30k


20

10

0

E 60

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	44.7	45.5	45.0
SAMPLE IMAGES		method	limit/base	current	history1	history2
Color						
Bottom				(15)		

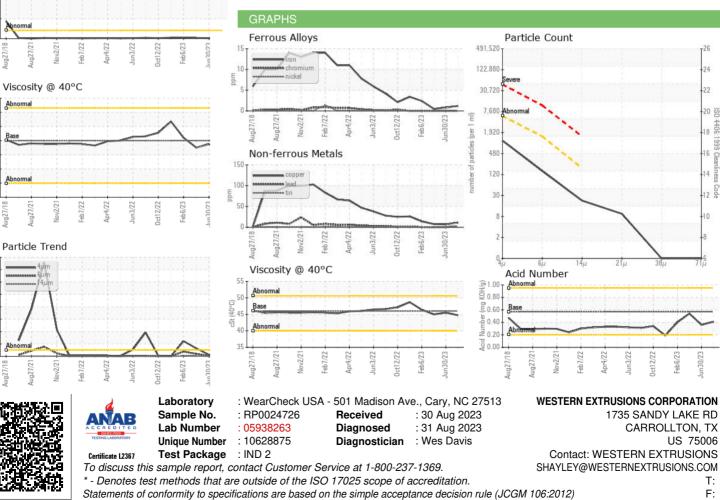

Submitted By: WESTERN EXTRUSIONS