



PROBLEM SUMMARY

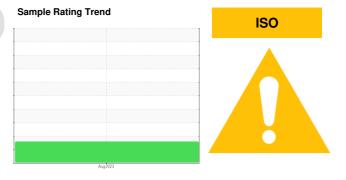

KAESER SK 20T 1466

Compressor Fluid KAESER SIGMA (OEM) M-460 (--- LTR)

COMPONENT CONDITION SUMMARY

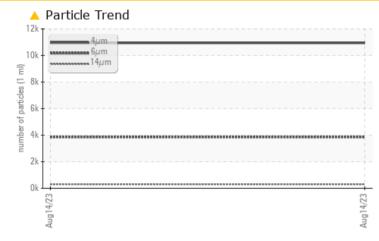

RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status			ABNORMAL	
Particles >6µm	ASTM D7647	>1300	<u> </u>	
Particles >14µm	ASTM D7647	>80	A 304	
Particles >21µm	ASTM D7647	>20	<u> </u>	
Oil Cleanliness	ISO 4406 (c)	>/17/13	A 21/19/15	

Customer Id: DIGPOW Sample No.: KCPA004941 Lab Number: 05938275 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Don Baldridge +1 <u>don.b505@comcast.net</u>

To change component or sample information: Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u> There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT



ISO



Compressor Fluid KAESER SIGMA (OEM) M-460 (--- LTR)

DIAGNOSIS

A Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.


Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA004941		
Sample Date		Client Info		14 Aug 2023		
Machine Age	hrs	Client Info		10		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
ron	ppm	ASTM D5185m	>50	0		
Chromium	ppm	ASTM D5185m	>10	0		
Nickel	ppm	ASTM D5185m	>3	0		
Titanium	ppm	ASTM D5185m	>3	0		
Silver		ASTM D5185m	>2	0		
Aluminum	ppm	ASTM D5185m	>10	0 <1		
	ppm					
Lead	ppm	ASTM D5185m	>10	0		
Copper	ppm		>50	6		
Tin	ppm	ASTM D5185m	>10	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0		
Barium	ppm	ASTM D5185m	90	2		
Volybdenum	ppm	ASTM D5185m	0	0		
Vanganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m	100	<1		
Calcium	ppm	ASTM D5185m	0	0		
Phosphorus	ppm	ASTM D5185m	0	0		
Zinc	ppm		0	21		
Sulfur	ppm	ASTM D5185m	23500	12621		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0		
Sodium	ppm	ASTM D5185m		0		
Potassium	ppm	ASTM D5185m	>20	1		
Water	%	ASTM D510311		0.007		
opm Water	ppm	ASTM D6304		76.0		
FLUID CLEANLIN		method	limit/base	current	history1	history2
Particles >4µm	_00	ASTM D7647		10944		
Particles >6µm		ASTM D7647	>1300	▲ 3861		
				▲ 300 I		
Particles >14µm Particles >21µm		ASTM D7647	>80			
radicies sz túm		ASTM D7647	>20	<u>▲</u> 68		
•		ASTM D7647	>4	2		
Particles >38µm		10711				
Particles >38µm Particles >71µm		ASTM D7647		0		
Particles >38μm Particles >71μm Oil Cleanliness		ASTM D7647 ISO 4406 (c)	>3 >/17/13	0 <u> </u>		
Particles >38µm Particles >71µm	TION					



OIL ANALYSIS REPORT

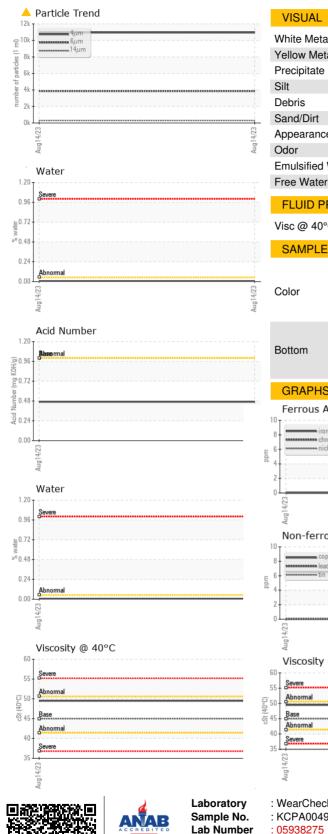

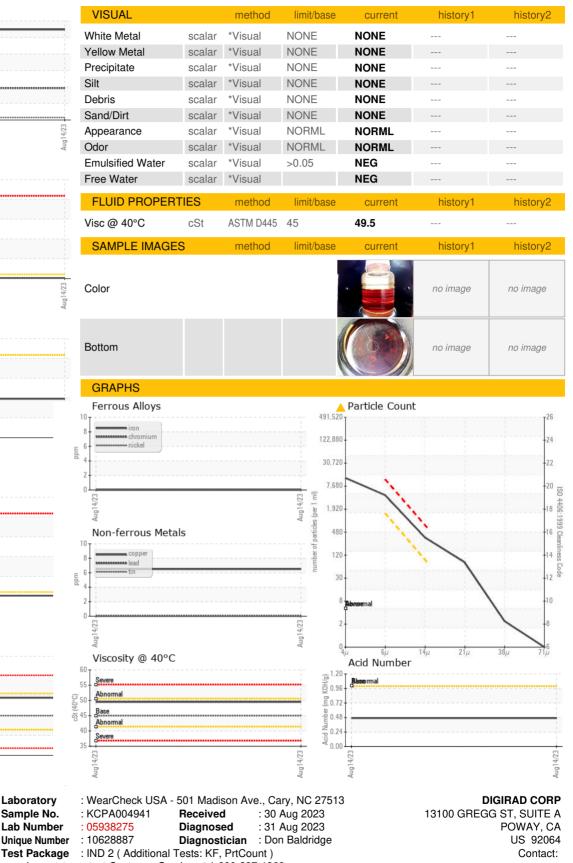

To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate L2367

Unique Number

T: F: