


PROBLEM SUMMARY

Sample Rating Trend

KAESER 7474252 Component

Component Compressor Fluid KAESER SIGMA (OEM) S-460 (--- GAL)

COMPONENT CONDITION SUMMARY

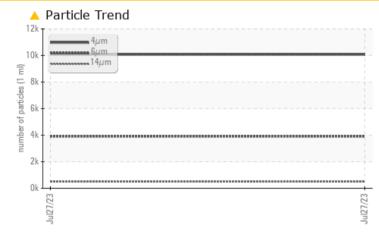

RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status		ABNORMAL					
Particles >6µm	ASTM D7647 >	1300 🔺 3916					
Particles >14µm	ASTM D7647 >	80 🔺 489					
Particles >21µm	ASTM D7647 >2	20 🔺 154					
Particles >38µm	ASTM D7647 >4	4 🔺 8					
Oil Cleanliness	ISO 4406 (c) >-	/17/13 🔺 21/19/16					

Customer Id: MARGOLCA Sample No.: KCPA005574 Lab Number: 05938291 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Don Baldridge +1 don.b505@comcast.net

To change component or sample information: Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u> There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT



ISO

Machine Id KAESER 7474252 Component

Compressor Fluid KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA005574		
Sample Date		Client Info		27 Jul 2023		
Machine Age	hrs	Client Info		4069		
Dil Age	hrs	Client Info		0		
Dil Changed		Client Info		N/A		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0		
Chromium	ppm	ASTM D5185m	>10	0		
Nickel	ppm	ASTM D5185m	>3	0		
Titanium	ppm	ASTM D5185m	>3	0		
Silver	ppm	ASTM D5185m	>2	0		
Aluminum	ppm	ASTM D5185m		<1		
Lead	ppm	ASTM D5185m	>10	0		
		ASTM D5185m		6		
Copper Tin	ppm	ASTM D5185m	>50 >10	0		
	ppm		>10	-		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m	90	2		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m	90	11		
Calcium	ppm	ASTM D5185m	2	0		
Phosphorus	ppm	ASTM D5185m		0		
Zinc	ppm	ASTM D5185m		11		
Sulfur	ppm	ASTM D5185m		23137		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m		<1		
Sodium	ppm	ASTM D5185m	220	0		
Potassium	ppm	ASTM D5185m	>20	3		
Water	%	ASTM D5185III	- = 0	0.013		
ppm Water	ppm	ASTM D6304 ASTM D6304	>500	135.3		
FLUID CLEANLIN	E55	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	1000	10076		
		ASTM D7647		▲ 3916		
-		ASTM D7647	>80	489		
Particles >14µm			- 20	154		
Particles >14µm Particles >21µm		ASTM D7647				
Particles >6μm Particles >14μm Particles >21μm Particles >38μm		ASTM D7647	>4	▲ 8		
Particles >14μm Particles >21μm Particles >38μm Particles >71μm			>4			
Particles >14µm Particles >21µm Particles >38µm		ASTM D7647	>4	▲ 8		
Particles >14μm Particles >21μm Particles >38μm Particles >71μm	TION	ASTM D7647 ASTM D7647	>4 >3	▲ 8 0		



Pio 0.1

0.00

1.20

0.9

_늘0.72

a²0.48 0.24

> 0.00 Cli

> > 52

50

48

(10°C) 40°C) 44 Ba

47

4(

3

ΠĿ

Abnorma

Abno

Water

Viscosity @ 40°C

OIL ANALYSIS REPORT


method


limit/base

current

history1

history2

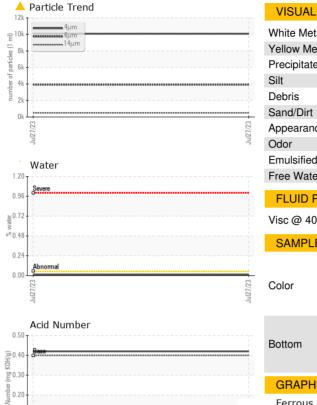

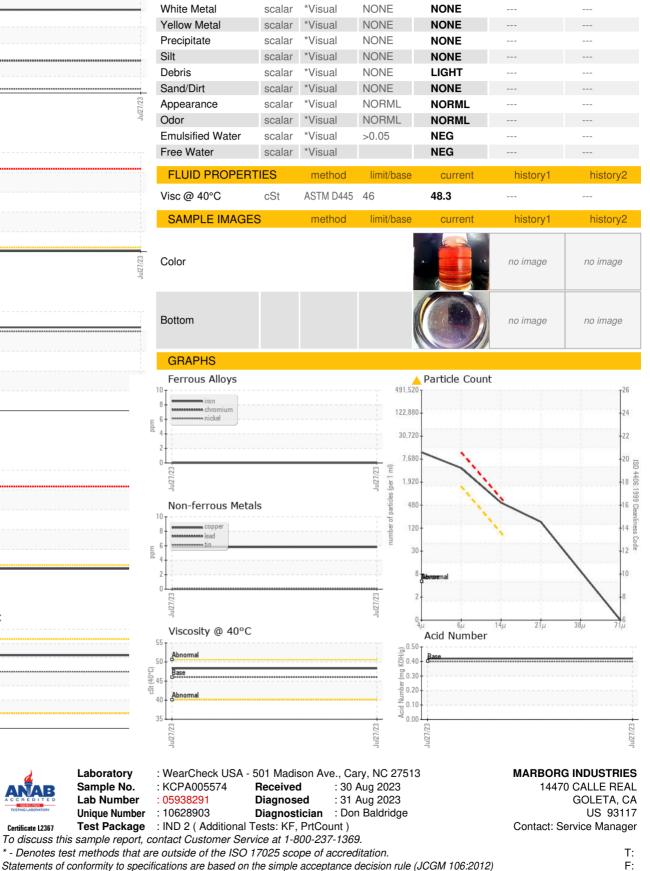

Report Id: MARGOLCA [WUSCAR] 05938291 (Generated: 08/31/2023 14:18:33) Rev: 1

Certificate L2367