

## **PROBLEM SUMMARY**


# Sample Rating Trend WATER

#### Machine Id 6625526 (S/N 1027) Component

Compressor Fluid

KAESER SIGMA (OEM) M-460 (--- GAL)

### COMPONENT CONDITION SUMMARY

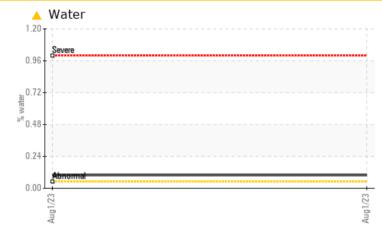

#### RECOMMENDATION

The filter change at the time of sampling has been noted. We were unable to perform a particle count due to a high concentration of particles present in this sample. We advise that you stop the unit and follow the water drain-off procedure for this component. We recommend an early resample in 500 hours to monitor this condition.

#### **PROBLEMATIC TEST RESULTS** Sample Status ABNORMAL ASTM D6304 >0.05 Water % 0.098 ppm Water ASTM D6304 >500 980 ppm Debris NONE scalar \*Visual MODER **Emulsified Water** scalar \*Visual >0.05 **0.2%** Free Water scalar \*Visual **1.0**

Customer Id: MARWESCA Sample No.: KCPA004182 Lab Number: 05938293 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Don Baldridge +1 don.b505@comcast.net


*To change component or sample information:* Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u>

RECOMMENDED ACTIONS								
Action	Status	Date	Done By	Description				
Alert			?	We were unable to perform a particle count due to a high concentration of particles present in this sample.				

HISTORICAL DIAGNOSIS



## **OIL ANALYSIS REPORT**





#### Machine Id 6625526 (S/N 1027) Component

Compressor Fluid KAESER SIGMA (OEM) M-460 (--- GAL)

#### DIAGNOSIS

#### Recommendation

The filter change at the time of sampling has been noted. We were unable to perform a particle count due to a high concentration of particles present in this sample. We advise that you stop the unit and follow the water drain-off procedure for this component. We recommend an early resample in 500 hours to monitor this condition.

#### Wear

All component wear rates are normal.

#### Contamination

Moderate concentration of visible dirt/debris present in the oil. There is a light concentration of water present in the oil. Free water present.


#### Fluid Condition


The AN level is acceptable for this fluid.


				Aug2023		
SAMPLE INFORM	<b>IATION</b>	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA004182		
Sample Date		Client Info		01 Aug 2023		
Machine Age	hrs	Client Info		14195		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	1		
Chromium	ppm	ASTM D5185m	>10	0		
Nickel	ppm	ASTM D5185m	>3	0		
Titanium	ppm	ASTM D5185m	>3	0		
Silver	ppm	ASTM D5185m	>2	0		
Aluminum	ppm	ASTM D5185m	>10	2		
Lead	ppm	ASTM D5185m	>10	<1		
Copper	ppm	ASTM D5185m	>50	12		
Tin	ppm	ASTM D5185m	>10	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
ADDITIVES Boron	ppm	method ASTM D5185m	limit/base	current 0	history1	history2
	ppm ppm					
Boron		ASTM D5185m	0	0		
Boron Barium	ppm	ASTM D5185m ASTM D5185m	0 90	0 4		
Boron Barium Molybdenum	ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m	0 90	0 4 0		
Boron Barium Molybdenum Manganese	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 90 0	0 4 0 0		
Boron Barium Molybdenum Manganese Magnesium	ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 90 0 100	0 4 0 0 9		
Boron Barium Molybdenum Manganese Magnesium Calcium	ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 90 0 100 0	0 4 0 0 9 0	  	  
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus	ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 90 0 100 0 0	0 4 0 9 0 0 0	   	   
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc	ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 90 0 100 0 0 0	0 4 0 9 0 0 0 64		   
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur	ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 90 0 100 0 0 0 23500	0 4 0 9 0 0 0 64 20530		
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 90 0 100 0 0 23500 limit/base	0 4 0 9 0 0 0 64 20530 current	     history1	
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon	ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m <b>method</b> ASTM D5185m	0 90 0 100 0 0 23500 limit/base	0 4 0 9 0 0 0 64 20530 current 0	      history1	     history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium	ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m <b>method</b> ASTM D5185m	0 90 0 100 0 0 23500 limit/base >25	0 4 0 9 0 0 0 64 20530 current 0 0	     history1	    history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m	0 90 0 100 0 0 23500 limit/base >25	0 4 0 9 0 0 0 64 20530 current 0 0 2	     history1	     history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium Water	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m	0 90 0 100 0 0 0 23500 23500 1imit/base >25 >20 >20 >0.05	0 4 0 9 0 0 64 20530 current 0 0 2 2 ▲ 0.098	    history1	    history2




## **OIL ANALYSIS REPORT**



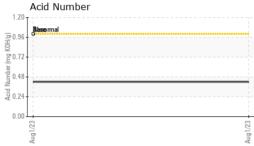

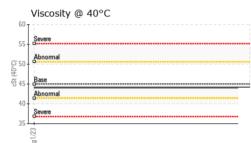

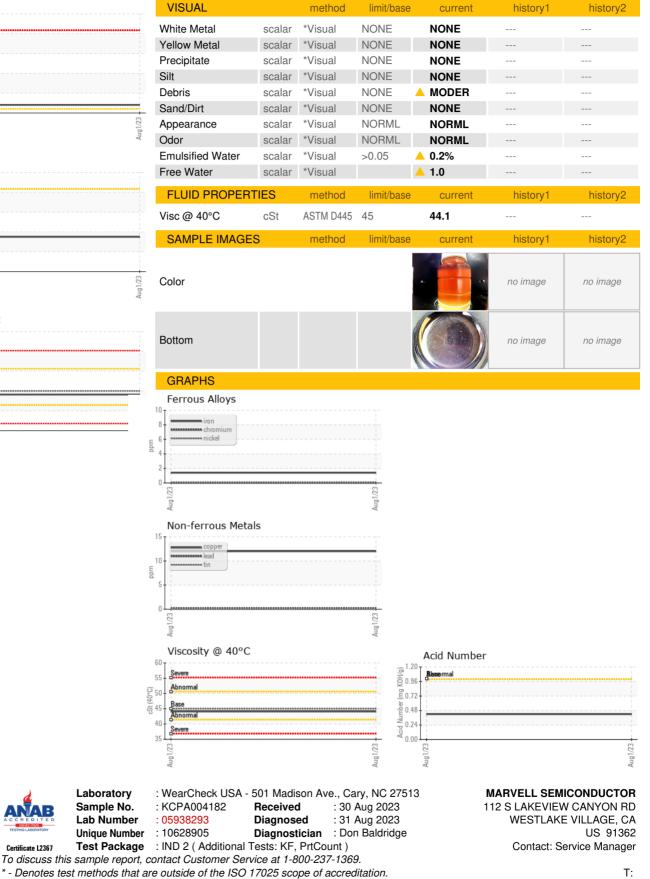

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate L2367

Contact/Location: Service Manager - MARWESCA

F: