




KAESER 7328450

Component Compressor Fluid KAESER SIGMA (OEM) S-460 (--- GAL)

COMPONENT CONDITION SUMMARY

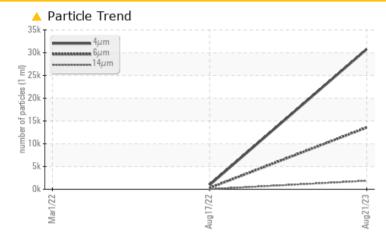

RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

THOBELIN THO TEOL	HECCEIC			
Sample Status		ABNORMAL	NORMAL	ABNORMAL
Particles >6µm	ASTM D7647 >130	00 🔺 13559	281	
Particles >14µm	ASTM D7647 >80	🔺 1869	24	
Particles >21µm	ASTM D7647 >20	<u> </u>	6	
Particles >38µm	ASTM D7647 >4	1 3	1	
Oil Cleanliness	ISO 4406 (c) >/1	7/13 🔺 22/21/18	17/15/12	


Customer Id: AMABAK Sample No.: KCP55314 Lab Number: 05938306 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Doug Bogart +1 (800)237-1369 x4016 <u>dougb@wearcheckusa.com</u>

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

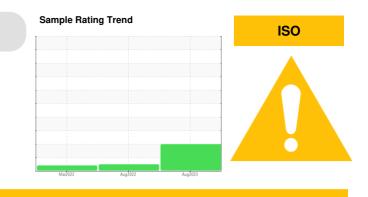

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

17 Aug 2022 Diag: Doug Bogart



No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

01 Mar 2022 Diag: Doug Bogart



Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.All component wear rates are normal. Moderate concentration of visible dirt/debris present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





OIL ANALYSIS REPORT

Sample Rating Trend ISO

Machine Id **KAESER 7328450** Component

Compressor Fluid KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCP55314	KC103345	KC89226
Sample Date		Client Info		21 Aug 2023	17 Aug 2022	01 Mar 2022
Machine Age	hrs	Client Info		18321	14161	10163
Oil Age	hrs	Client Info		4161	14161	10163
Oil Changed		Client Info		Not Changd	Changed	Changed
Sample Status				ABNORMAL	NORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<1	0	0
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	1	<1	0
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>50	4	2	4
Tin	ppm	ASTM D5185m	>10	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m	90	41	66	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m	90	47	65	27
Calcium	ppm	ASTM D5185m	2	<1	3	0
Phosphorus	ppm	ASTM D5185m		<1	2	0
Zinc	ppm	ASTM D5185m		4	1	4
Sulfur	ppm	ASTM D5185m		19502	17027	15702
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	2	<1	0
Sodium	ppm	ASTM D5185m		16	30	6
Potassium	ppm	ASTM D5185m	>20	5	7	0
Water	%	ASTM D6304	>0.05	0.028	0.022	0.011
ppm Water	ppm	ASTM D6304	>500	282.9	221.7	112.1
FLUID CLEANLINE	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		30746	923	
Particles >6µm		ASTM D7647	>1300	<u> </u>	281	
Particles >14µm		ASTM D7647	>80	<u> </u>	24	
Particles >21µm		ASTM D7647	>20	<u> </u>	6	
Particles >38µm		ASTM D7647	>4	<mark>/</mark> 13	1	
Particles >71µm		ASTM D7647		1	0	
Oil Cleanliness		ISO 4406 (c)	>/17/13	A 22/21/18	17/15/12	
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.34	0.41	0.35



Built for a lifetime.


OIL ANALYSIS REPORT

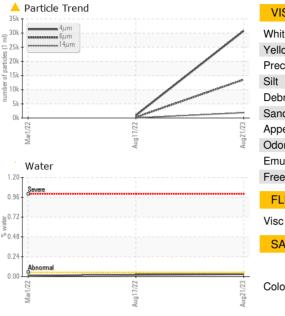

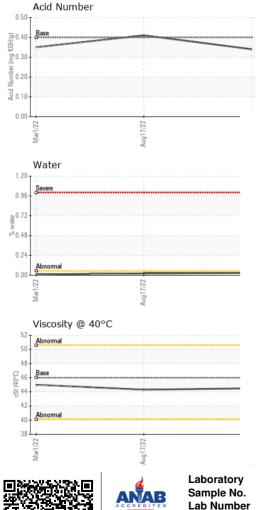

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	NONE	🔺 MODER
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	44.5	44.3	45.0
SAMPLE IMAGES	S	method	limit/base	current	history1	history2
Color						

Bottom

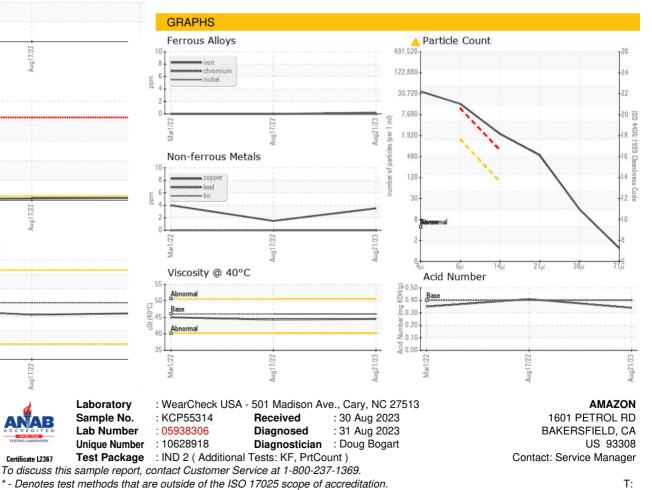

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate L2367