




# PROBLEM SUMMARY

Sample Rating Trend

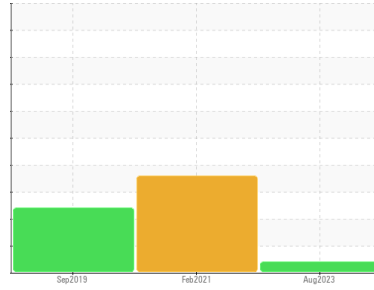

## VIS DEBRIS



Machine Id  
**KAESER SM 7.5 6259582 (S/N 1027)**  
 Component  
**Compressor**  
 Fluid  
**KAESER SIGMA (OEM) M-460 (--- QTS)**

### COMPONENT CONDITION SUMMARY

No relevant graphs to display

### RECOMMENDATION

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.

### PROBLEMATIC TEST RESULTS

Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
Debris	scalar	*Visual	NONE	▲ MODER	▲ MODER	▲ MODER

**Customer Id:** CASFORCO  
**Sample No.:** KCPA003856  
**Lab Number:** 05938316  
**Test Package:** IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Doug Bogart +1 (800)237-1369 x4016  
[dougb@wearcheckusa.com](mailto:dougb@wearcheckusa.com)

To change component or sample information:  
 Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	Oil and filter change at the time of sampling has been noted.
Change Filter	---	---	?	Oil and filter change at the time of sampling has been noted.
Alert	---	---	?	We were unable to perform a particle count due to a high concentration of particles present in this sample.

## HISTORICAL DIAGNOSIS

### 25 Feb 2021 Diag: Don Baldrige

#### WATER



Oil and filter change at the time of sampling has been noted. We recommend an early resample in 500 hours to monitor this condition. We were unable to perform a particle count due to a high concentration of particles present in this sample. All component wear rates are normal. There is a light concentration of water present in the oil. Free water present. Moderate concentration of visible dirt/debris present in the oil. The AN level is acceptable for this fluid.

[view report](#)



### 25 Sep 2019 Diag: Don Baldrige

#### ISO




No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. Moderate concentration of visible dirt/debris present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

[view report](#)



# OIL ANALYSIS REPORT

Sample Rating Trend

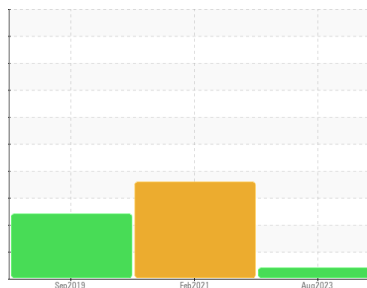

**VIS DEBRIS**



Machine Id  
**KAESER SM 7.5 6259582 (S/N 1027)**

Component  
**Compressor**

Fluid  
**KAESER SIGMA (OEM) M-460 (--- QTS)**

## DIAGNOSIS

### ▲ Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.

### Wear

All component wear rates are normal.

### ▲ Contamination

Moderate concentration of visible dirt/debris present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>KCPA003856</b>	KCP27008	KCP16645
Sample Date	Client Info		<b>23 Aug 2023</b>	25 Feb 2021	25 Sep 2019
Machine Age	hrs	Client Info	<b>14126</b>	7071	3471
Oil Age	hrs	Client Info	<b>0</b>	3600	3471
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>ABNORMAL</b>	ABNORMAL	ABNORMAL

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	<b>0</b>	<1	2
Chromium	ppm	ASTM D5185m >10	<b>0</b>	0	0
Nickel	ppm	ASTM D5185m >3	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m >3	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	<1	<1
Aluminum	ppm	ASTM D5185m >10	<b>&lt;1</b>	<1	<1
Lead	ppm	ASTM D5185m >10	<b>0</b>	1	3
Copper	ppm	ASTM D5185m >50	<b>44</b>	32	14
Tin	ppm	ASTM D5185m >10	<b>0</b>	0	0
Antimony	ppm	ASTM D5185m	<b>---</b>	3	2
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>0</b>	1	0
Barium	ppm	ASTM D5185m 90	<b>&lt;1</b>	<1	0
Molybdenum	ppm	ASTM D5185m 0	<b>0</b>	1	0
Manganese	ppm	ASTM D5185m	<b>0</b>	0	0
Magnesium	ppm	ASTM D5185m 100	<b>0</b>	1	<1
Calcium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Phosphorus	ppm	ASTM D5185m 0	<b>2</b>	0	0
Zinc	ppm	ASTM D5185m 0	<b>0</b>	<1	1
Sulfur	ppm	ASTM D5185m 23500	<b>19400</b>	12552	13462

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>2</b>	4	<1
Sodium	ppm	ASTM D5185m	<b>0</b>	<1	0
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	0	2
Water	%	ASTM D6304 >0.05	<b>0.009</b>	▲ 0.204	0.005
ppm Water	ppm	ASTM D6304 >500	<b>99.3</b>	▲ 2040	51.1




## FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		<b>---</b>	---	146463
Particles >6µm	ASTM D7647	>1300	<b>---</b>	---	▲ 63008
Particles >14µm	ASTM D7647	>80	<b>---</b>	---	▲ 5984
Particles >21µm	ASTM D7647	>20	<b>---</b>	---	▲ 1533
Particles >38µm	ASTM D7647	>4	<b>---</b>	---	▲ 91
Particles >71µm	ASTM D7647	>3	<b>---</b>	---	▲ 9
Oil Cleanliness	ISO 4406 (c)	>--/17/13	<b>---</b>	---	▲ 23/20

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 1.0	<b>0.37</b>	0.346	0.310


# OIL ANALYSIS REPORT

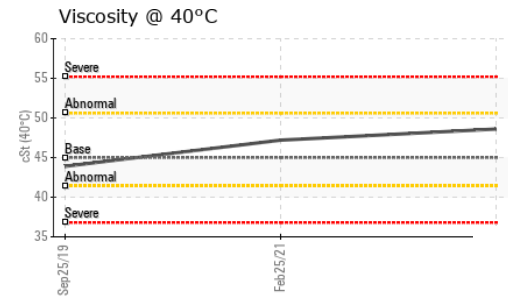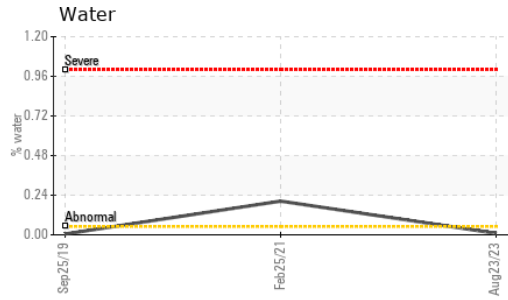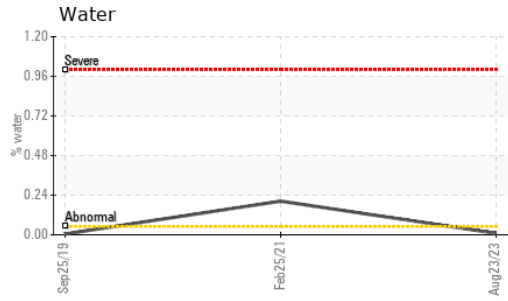





VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	NONE	
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	
Precipitate	scalar	*Visual	NONE	NONE	NONE	
Silt	scalar	*Visual	NONE	NONE	NONE	
Debris	scalar	*Visual	NONE	▲ MODER	▲ MODER	▲ MODER
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	
Appearance	scalar	*Visual	NORML	NORML	NORML	
Odor	scalar	*Visual	NORML	NORML	NORML	
Emulsified Water	scalar	*Visual	>0.05	▲ 0.2%	NEG	
Free Water	scalar	*Visual		▲ 2.0	NEG	

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	45	48.6	47.2	43.9

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

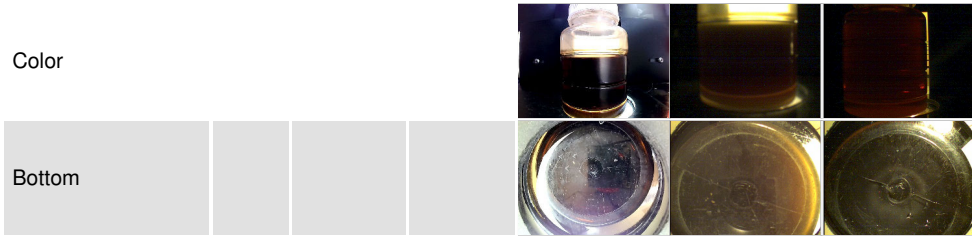

## GRAPHS

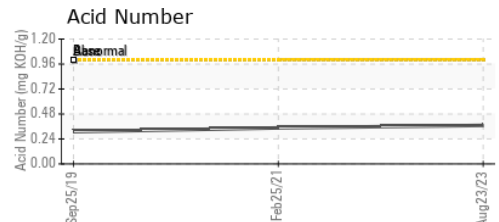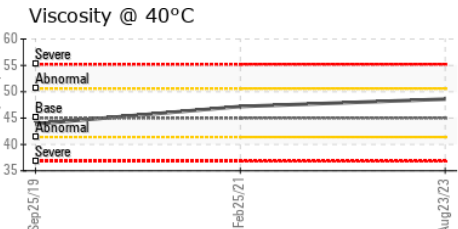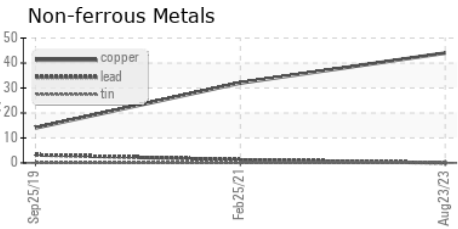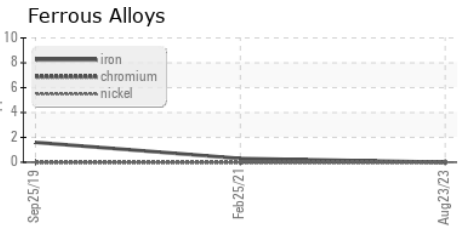

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KCPA003856 **Received** : 30 Aug 2023  
**Lab Number** : 05938316 **Diagnosed** : 31 Aug 2023  
**Unique Number** : 10628928 **Diagnostician** : Doug Bogart  
**Test Package** : IND 2 ( Additional Tests: KF, PrtCount )

**CASTORENA MARBLE**  
 1934 E LINCOLN AVE  
 FORT COLLINS, CO  
 US 80524  
 Contact:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: