

No relevant graphs to display

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS							
Sample Status				ABNORMAL			
Debris	scalar	*Visual	NONE	A MODER			

Customer Id: UCJEMWES Sample No.: UCS05938367 Lab Number: 05938367 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Angela Borella +1 800-237-1369 angela.borella@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED ACTIONS						
Action	Status	Date	Done By	Description		
Change Fluid			?	Oil and filter change at the time of sampling has been noted.		
Change Filter			?	Oil and filter change at the time of sampling has been noted.		

HISTORICAL DIAGNOSIS

Sullivan **Palatek**

OIL ANALYSIS REPORT

PALASYN 45 ATLAS COPCO All660514 - KUST Component

Compressor

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Moderate concentration of visible dirt/debris present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


				Aug2023		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		UCS05938367		
Sample Date		Client Info		23 Aug 2023		
Machine Age	hrs	Client Info		14570		
Dil Age	hrs	Client Info		1103		
Oil Changed		Client Info		Changed		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
ron	ppm	ASTM D5185m	>50	<1		
Chromium	ppm	ASTM D5185m		0		
Nickel	ppm	ASTM D5185m		0		
Fitanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>15	<1		
_ead	ppm	ASTM D5185m	>65	0		
Copper	ppm	ASTM D5185m	>65	<1		
Гin	ppm	ASTM D5185m	>10	0		
/anadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0.0	0		
Barium	ppm	ASTM D5185m	0.0	۰ <1		
Molybdenum	ppm	ASTM D5185m	0	0		
Manganese	ppm	ASTM D5185m	0	0		
Vagnesium	ppm	ASTM D5185m	0.0	0		
Calcium	ppm	ASTM D5185m	0.0	0		
Phosphorus	ppm	ASTM D5185m	966	200		
Zinc	ppm	ASTM D5185m	0	19		
Sulfur	ppm	ASTM D5185m	1309	1043		
CONTAMINANTS	6	method	limit/base	current	history1	history2
Silicon	ppm		>35	<1		
Sodium	ppm	ASTM D5185m	200	0		
Potassium	ppm	ASTM D5185m	>20	<1		
FLUID DEGRADA		method	limit/base		history1	history2
					motory1	nistory2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.172	0.22		
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE		
Yellow Metal	scalar	*Visual	NONE	NONE		
Precipitate	scalar	*Visual	NONE	NONE		
Silt	scalar	*Visual	NONE	NONE		
Debris	scalar	*Visual	NONE			
Sand/Dirt	scalar	*Visual	NONE	NONE		
Appearance	scalar	*Visual	NORML	NORML		
Odor	scalar	*Visual	NORML	NORML		
Emulsified Water	scalar	*Visual	>0.1	NEG		
Free Water	scalar	*Visual		NEG		

Sample Rating Trend

VIS DEBRIS



OIL ANALYSIS REPORT

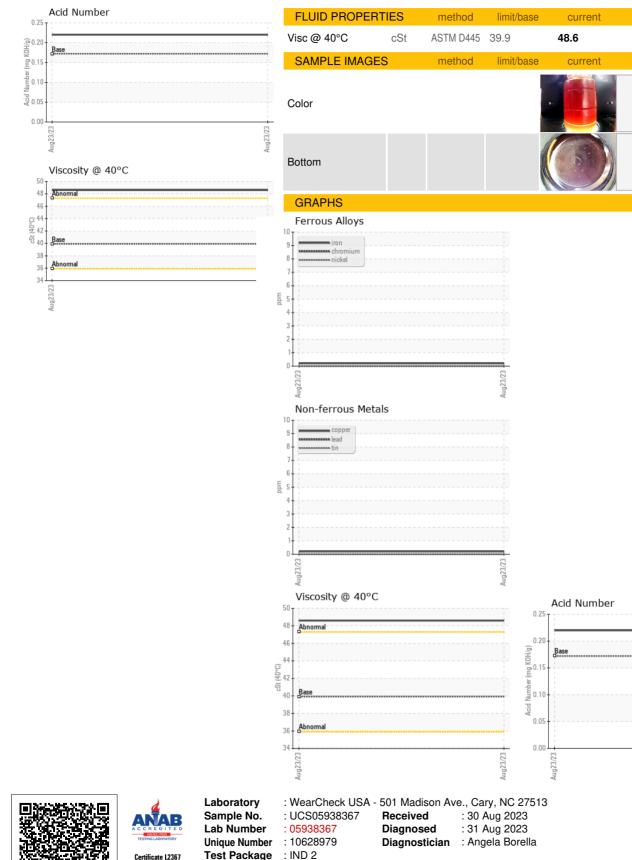

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

US 58078

F: x:

JEMCO-MAXAIR

WEST FARGO, ND

dalek@jemco-maxair.com

Contact: DALE K

T: (701)281-0362

history2

history2

no image

no image

history1

history1

no image

no image