




# OIL ANALYSIS REPORT

Sample Rating Trend

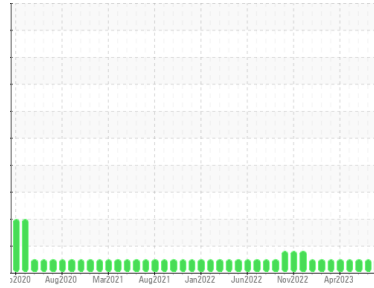

**NORMAL**



Area  
**GEORGIA**  
 Machine Id  
**6876**

Component  
**Diesel Engine**  
 Fluid

**DISEL ENGINE OIL SAE 15W40 (--- QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

| SAMPLE INFORMATION |                 | method | limit/base | current            | history1    | history2    |
|--------------------|-----------------|--------|------------|--------------------|-------------|-------------|
| Sample Number      | Client Info     |        |            | <b>WC0754707</b>   | WC0754705   | WC0820363   |
| Sample Date        | Client Info     |        |            | <b>01 Aug 2023</b> | 06 Jun 2023 | 01 Jun 2023 |
| Machine Age        | mls Client Info |        |            | <b>167224</b>      | 164534      | 162054      |
| Oil Age            | mls Client Info |        |            | <b>0</b>           | 0           | 0           |
| Oil Changed        | Client Info     |        |            | <b>Not Changed</b> | Not Changed | Not Changed |
| Sample Status      |                 |        |            | <b>NORMAL</b>      | NORMAL      | NORMAL      |

| CONTAMINATION |           | method | limit/base | current        | history1 | history2 |
|---------------|-----------|--------|------------|----------------|----------|----------|
| Fuel          | WC Method | >5     |            | <b>&lt;1.0</b> | <1.0     | <1.0     |
| Glycol        | WC Method |        |            | <b>NEG</b>     | NEG      | NEG      |

| WEAR METALS |     | method      | limit/base | current      | history1 | history2 |
|-------------|-----|-------------|------------|--------------|----------|----------|
| Iron        | ppm | ASTM D5185m | >100       | <b>78</b>    | 83       | 80       |
| Chromium    | ppm | ASTM D5185m | >20        | <b>2</b>     | 3        | 2        |
| Nickel      | ppm | ASTM D5185m | >4         | <b>&lt;1</b> | <1       | <1       |
| Titanium    | ppm | ASTM D5185m |            | <b>&lt;1</b> | <1       | <1       |
| Silver      | ppm | ASTM D5185m | >3         | <b>0</b>     | 0        | 0        |
| Aluminum    | ppm | ASTM D5185m | >20        | <b>15</b>    | 14       | 14       |
| Lead        | ppm | ASTM D5185m | >40        | <b>&lt;1</b> | <1       | <1       |
| Copper      | ppm | ASTM D5185m | >330       | <b>7</b>     | 8        | 6        |
| Tin         | ppm | ASTM D5185m | >15        | <b>&lt;1</b> | <1       | <1       |
| Vanadium    | ppm | ASTM D5185m |            | <b>0</b>     | 0        | 0        |
| Cadmium     | ppm | ASTM D5185m |            | <b>0</b>     | 0        | 0        |

| ADDITIVES  |     | method      | limit/base | current      | history1 | history2 |
|------------|-----|-------------|------------|--------------|----------|----------|
| Boron      | ppm | ASTM D5185m | 250        | <b>34</b>    | 38       | 42       |
| Barium     | ppm | ASTM D5185m | 10         | <b>&lt;1</b> | 0        | 2        |
| Molybdenum | ppm | ASTM D5185m | 100        | <b>26</b>    | 25       | 26       |
| Manganese  | ppm | ASTM D5185m |            | <b>&lt;1</b> | 1        | <1       |
| Magnesium  | ppm | ASTM D5185m | 450        | <b>361</b>   | 354      | 370      |
| Calcium    | ppm | ASTM D5185m | 3000       | <b>1741</b>  | 1897     | 1827     |
| Phosphorus | ppm | ASTM D5185m | 1150       | <b>910</b>   | 969      | 961      |
| Zinc       | ppm | ASTM D5185m | 1350       | <b>1173</b>  | 1220     | 1236     |
| Sulfur     | ppm | ASTM D5185m | 4250       | <b>3130</b>  | 3042     | 3447     |



| CONTAMINANTS |     | method      | limit/base | current   | history1 | history2 |
|--------------|-----|-------------|------------|-----------|----------|----------|
| Silicon      | ppm | ASTM D5185m | >25        | <b>18</b> | 19       | 19       |
| Sodium       | ppm | ASTM D5185m | >158       | <b>9</b>  | 7        | 9        |
| Potassium    | ppm | ASTM D5185m | >20        | <b>23</b> | 25       | 23       |

| INFRA-RED |          | method      | limit/base | current     | history1 | history2 |
|-----------|----------|-------------|------------|-------------|----------|----------|
| Soot %    | %        | *ASTM D7844 | >3         | <b>1.4</b>  | 1.5      | 1.4      |
| Nitration | Abs/cm   | *ASTM D7624 | >20        | <b>16.0</b> | 15.8     | 15.4     |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30        | <b>30.6</b> | 31.1     | 31.6     |

| FLUID DEGRADATION |          | method      | limit/base | current     | history1 | history2 |
|-------------------|----------|-------------|------------|-------------|----------|----------|
| Oxidation         | Abs/.1mm | *ASTM D7414 | >25        | <b>29.9</b> | 30.5     | 30.5     |
| Base Number (BN)  | mg KOH/g | ASTM D2896  | 8.5        | <b>6.4</b>  | 6.0      | 5.9      |








# OIL ANALYSIS REPORT

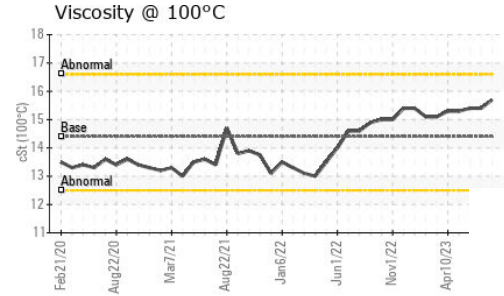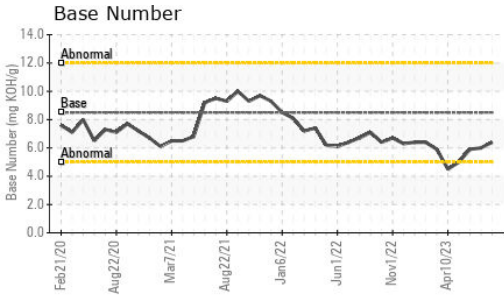

| VISUAL           | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | NONE     |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Silt             | scalar | *Visual    | NONE    | NONE     | NONE     |
| Debris           | scalar | *Visual    | NONE    | NONE     | NONE     |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | NONE     |
| Appearance       | scalar | *Visual    | NORML   | NORML    | NORML    |
| Odor             | scalar | *Visual    | NORML   | NORML    | NORML    |
| Emulsified Water | scalar | *Visual    | >0.2    | NEG      | NEG      |
| Free Water       | scalar | *Visual    |         | NEG      | NEG      |

| FLUID PROPERTIES | method | limit/base | current | history1    | history2 |      |
|------------------|--------|------------|---------|-------------|----------|------|
| Visc @ 100°C     | cSt    | ASTM D445  | 14.4    | <b>15.7</b> | 15.4     | 15.4 |

### GRAPHS

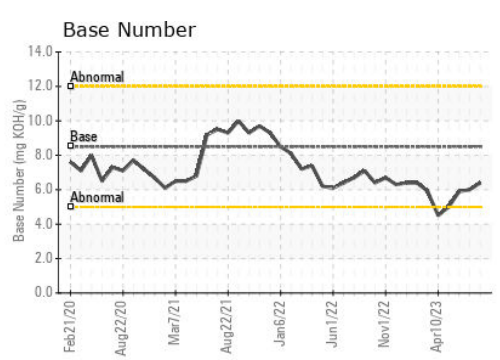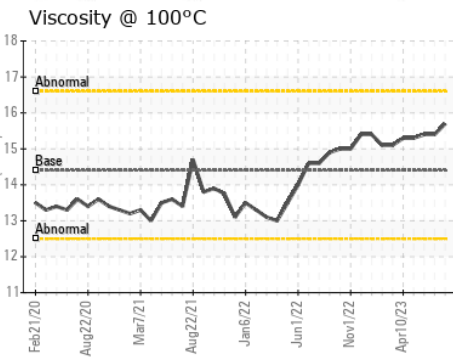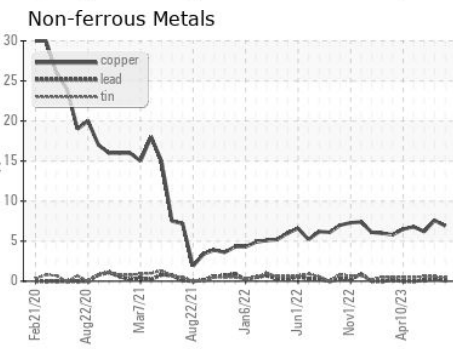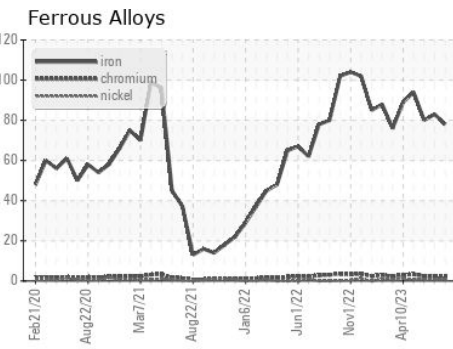

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0754707 **Received** : 30 Aug 2023  
**Lab Number** : **05938747** **Diagnosed** : 31 Aug 2023  
**Unique Number** : 10629359 **Diagnostician** : Doug Bogart  
**Test Package** : FLEET

**LIBERTY DISPOSAL**  
 6401 S EASTERN AVE  
 OKLAHOMA CITY, OK  
 US 73149  
 Contact: Loran Cottle  
 l.cottle@ldi89.com  
 T: (910)970-0291  
 F: x:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)