



# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**



Machine Id

**5831**

Component

**Diesel Engine**

Fluid

**DISEL ENGINE OIL SAE 15W40 (--- QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0646037</b>	---	---
Sample Date	Client Info		<b>29 Aug 2023</b>	---	---
Machine Age	mls	Client Info	<b>376870</b>	---	---
Oil Age	mls	Client Info	<b>0</b>	---	---
Oil Changed	Client Info		<b>Not Chngd</b>	---	---
Sample Status			<b>NORMAL</b>	---	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	---	---
Glycol	WC Method		<b>NEG</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>23</b>	---	---
Chromium	ppm	ASTM D5185m >20	<b>1</b>	---	---
Nickel	ppm	ASTM D5185m >4	<b>0</b>	---	---
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m >3	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	---	---
Lead	ppm	ASTM D5185m >40	<b>12</b>	---	---
Copper	ppm	ASTM D5185m >330	<b>2</b>	---	---
Tin	ppm	ASTM D5185m >15	<b>1</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	---	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	---	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 250	<b>63</b>	---	---
Barium	ppm	ASTM D5185m 10	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m 100	<b>23</b>	---	---
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185m 450	<b>225</b>	---	---
Calcium	ppm	ASTM D5185m 3000	<b>1934</b>	---	---
Phosphorus	ppm	ASTM D5185m 1150	<b>939</b>	---	---
Zinc	ppm	ASTM D5185m 1350	<b>1193</b>	---	---
Sulfur	ppm	ASTM D5185m 4250	<b>3266</b>	---	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>5</b>	---	---
Sodium	ppm	ASTM D5185m >158	<b>4</b>	---	---
Potassium	ppm	ASTM D5185m >20	<b>6</b>	---	---

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.7</b>	---	---
Nitration	Abs/cm	*ASTM D7624 >20	<b>12.8</b>	---	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>28.7</b>	---	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>27.0</b>	---	---
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	<b>6.1</b>	---	---











# OIL ANALYSIS REPORT

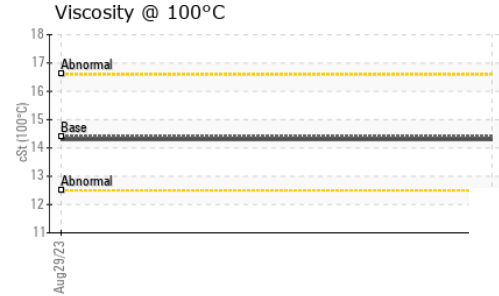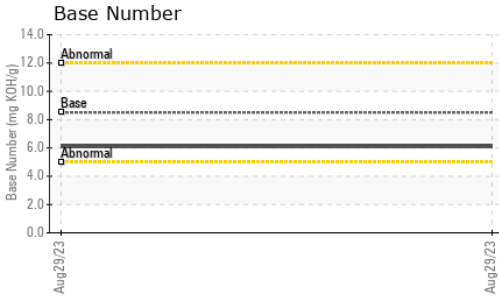

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	<b>14.3</b>	---

## GRAPHS

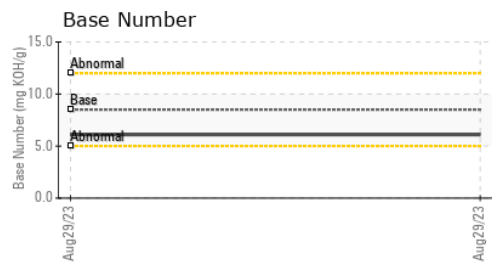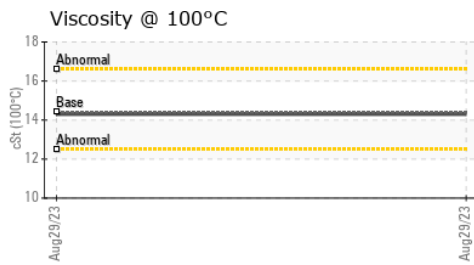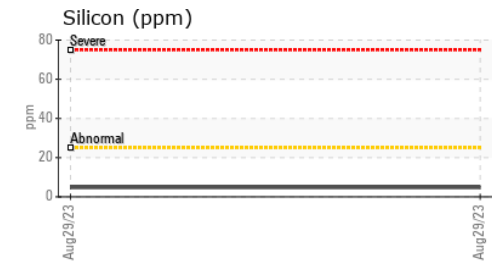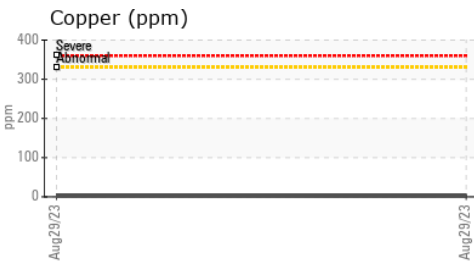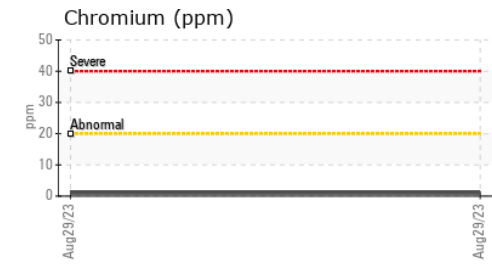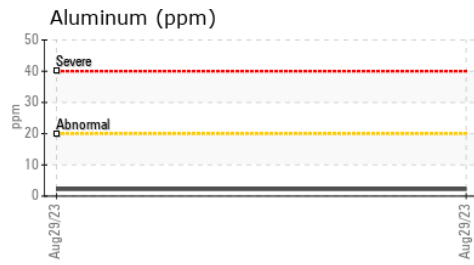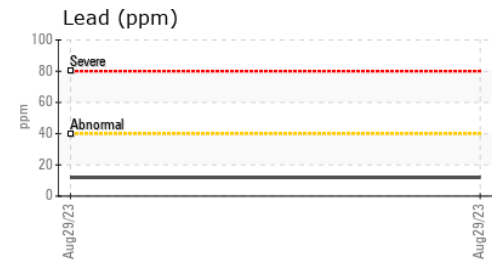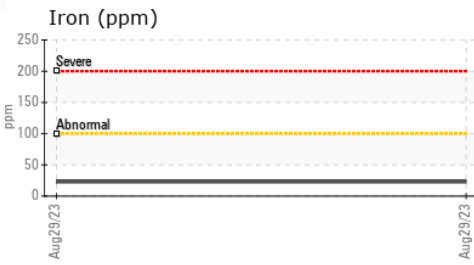

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0646037      **Received** : 30 Aug 2023  
**Lab Number** : **05938752**      **Diagnosed** : 31 Aug 2023  
**Unique Number** : 10629364      **Diagnostician** : Doug Bogart  
**Test Package** : MOB1+

**LIBERTY DISPOSAL**  
 6401 S EASTERN AVE  
 OKLAHOMA CITY, OK  
 US 73149  
 Contact: Loran Cottle  
 l.cottle@ldi89.com  
 T: (910)970-0291  
 F: x:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)