

OIL ANALYSIS REPORT

COLORADO/443/EG - DOZER 36.14L [COLORADO^443^EG - DOZER]





Sample Rating Trend



	SAMPLE INFORM	1ATION	method	limit/base	current	history1	history2
	Sample Number		Client Info		WC0823094	WC0766142	WC0672174
to monitor.	Sample Date		Client Info		25 Aug 2023	12 Dec 2022	02 Mar 2022
	Machine Age	hrs	Client Info		17392	16910	16182
	Oil Age	hrs	Client Info		482	0	16469
	Oil Changed		Client Info		Not Changd	Changed	Not Changd
for your target	Sample Status				NORMAL	NORMAL	NORMAL
em and fluid	WEAR METALS		method	limit/base	current	history1	history2
	Iron	ppm	ASTM D5185m	>20	5	8	0
d. The	Chromium	ppm	ASTM D5185m	>10	0	<1	<1
er service.	Nickel	ppm	ASTM D5185m	>10	0	0	0
31 301 100.	Titanium	ppm	ASTM D5185m		0	<1	<1
	Silver	ppm	ASTM D5185m		0	1	0
	Aluminum	ppm	ASTM D5185m	>10	3	5	3
	Lead	ppm	ASTM D5185m	>10	0	<1	<1
	Copper	ppm	ASTM D5185m	>75	2	3	2
	Tin	ppm	ASTM D5185m	>10	<1	0	0
	Antimony	ppm	ASTM D5185m				0
	Vanadium	ppm	ASTM D5185m		0	<1	0
	Cadmium	ppm	ASTM D5185m		0	0	0
	ADDITIVES		method	limit/base	current	history1	history2
	Boron	ppm	ASTM D5185m		22	34	31
	Barium	ppm	ASTM D5185m		0	0	0
	Molybdenum	ppm	ASTM D5185m		<1	2	2
	Manganese	ppm	ASTM D5185m		<1	<1	0
	Magnesium	ppm	ASTM D5185m		26	33	34
	Calcium	ppm	ASTM D5185m		2993	2930	2917
	Phosphorus	ppm	ASTM D5185m		911	991	995
	Zinc	ppm	ASTM D5185m		1139	1238	1217
	Sulfur	ppm	ASTM D5185m		4713	5301	3941
	CONTAMINANTS		method	limit/base	current	history1	history2
	Silicon	ppm	ASTM D5185m	>20	9	9	7
	Sodium	ppm	ASTM D5185m		1	1	0
	Potassium	ppm	ASTM D5185m	>20	0	2	2
	FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
	Particles >4µm		ASTM D7647		2057	4517	5324
	Particles >6µm		ASTM D7647	>2500	211	358	1181
	Particles >14µm		ASTM D7647	>640	16	31	133
			ASTM D7647	> 160	5	7	28
	Particles >21µm		ASTIVI D7047	>100	5	1	20

Recommendation

Resample at the next service interval to

Component

Hydraulic System

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable f ISO 4406 cleanliness code. The system cleanliness is acceptable.


Fluid Condition

The AN level is acceptable for this fluid condition of the oil is suitable for furthe

ppm	ASTM D5185m	>75	2	3	2
ppm	ASTM D5185m	>10	<1	0	0
ppm	ASTM D5185m				0
ppm	ASTM D5185m		0	<1	0
ppm	ASTM D5185m		0	0	0
	method	limit/base	current	history1	history2
ppm	ASTM D5185m		22	34	31
ppm	ASTM D5185m		0	0	0
ppm	ASTM D5185m		<1	2	2
ppm	ASTM D5185m		<1	<1	0
ppm	ASTM D5185m		26	33	34
ppm	ASTM D5185m		2993	2930	2917
ppm	ASTM D5185m		911	991	995
ppm	ASTM D5185m		1139	1238	1217
ppm	ASTM D5185m		4713	5301	3941
	method	limit/base	current	history1	history2
ppm	ASTM D5185m	>20	9	9	7
ppm	ASTM D5185m		1	1	0
ppm	ASTM D5185m	>20	0	2	2
IESS	method	limit/base	current	history1	history2
	ASTM D7647		2057	4517	5324
	ASTM D7647 ASTM D7647	>2500	2057 211	4517 358	5324 1181
		>2500 >640			
	ASTM D7647	>640	211	358	1181
	ASTM D7647 ASTM D7647	>640	211 16	358 31	1181 133
	ASTM D7647 ASTM D7647 ASTM D7647	>640 >160 >40	211 16 5	358 31 7	1181 133 28
	ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>640 >160 >40	211 16 5 0	358 31 7 1	1181 133 28 3
TION	ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>640 >160 >40 >10	211 16 5 0 0	358 31 7 1 1	1181 133 28 3 0
NTION mg KOH/g	ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ISO 4406 (c)	>640 >160 >40 >10 >/18/16	211 16 5 0 0 18/15/11	358 31 7 1 1 19/16/12	1181 133 28 3 0 20/17/14
	ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ISO 4406 (c) method	>640 >160 >40 >10 >/18/16	211 16 5 0 0 18/15/11 current	358 31 7 1 1 19/16/12 history1	1181 133 28 3 0 20/17/14 history2
	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ppmASTM D5185mppmASTM D5185m	ppmASTM D5185mImage: Stress of the str	ppm ASTM D5185m ppm ASTM D5185m 0 ppm ASTM D5185m 22 ppm ASTM D5185m 22 ppm ASTM D5185m 21 ppm ASTM D5185m <1 ppm ASTM D5185m <1 ppm ASTM D5185m 26 ppm ASTM D5185m 26 ppm ASTM D5185m 911 ppm ASTM D5185m 911 ppm ASTM D5185m 911 ppm ASTM D5185m 4713 cmethod limit/base current ppm ASTM D5185m >20 9 ppm ASTM D5185m 20 0	ppm ASTM D5185m ppm ASTM D5185m 0 <1 ppm ASTM D5185m 0 0 ppm ASTM D5185m 0 0 ppm ASTM D5185m 0 0 ppm ASTM D5185m 22 34 ppm ASTM D5185m 22 34 ppm ASTM D5185m 21 2 ppm ASTM D5185m <1




OIL ANALYSIS REPORT

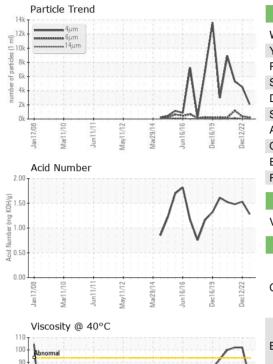

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	57.6	77.0	102	102
SAMPLE IMAGES	S	method	limit/base	current	history1	history2
Color						

Bottom

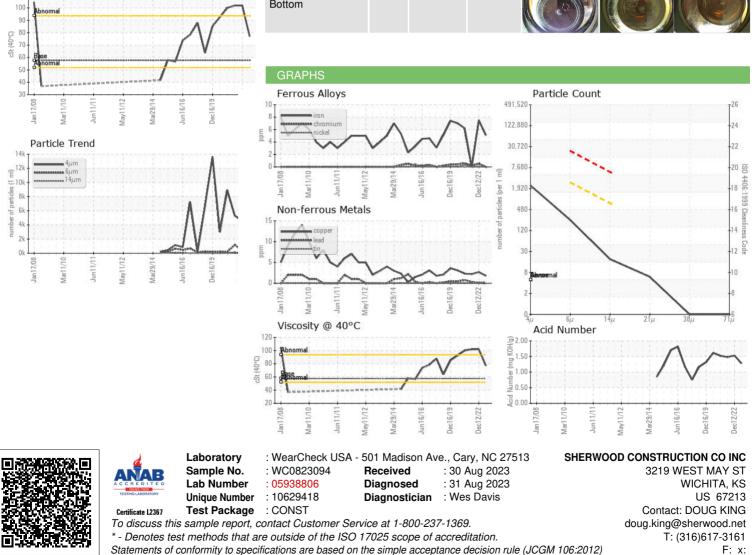

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Submitted By: BRANDEN JAQUIAS