

# **PROBLEM SUMMARY**

# [187640-N2STV4W] Machine Id BT 5164 VHP2


Component

Pump Hydraulic System

**MOBIL DTE 25 (15 GAL)** 

# Sample Rating Trend ISO Judio23

## **COMPONENT CONDITION SUMMARY**

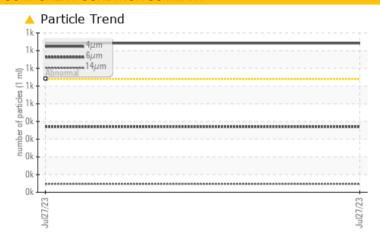

### RECOMMENDATION

We recommend you service the filters on this component. Resample at the next service interval to monitor.

| PROBLEMATIC TEST RESULTS |              |           |                 |          |          |  |  |  |  |  |
|--------------------------|--------------|-----------|-----------------|----------|----------|--|--|--|--|--|
| Sample Status            |              |           | ABNORMAL        |          |          |  |  |  |  |  |
| Particles >4µm           | ASTM D7647   | >640      | <b>A</b> 842    |          |          |  |  |  |  |  |
| Particles >6µm           | ASTM D7647   | >160      | <b>▲</b> 370    |          |          |  |  |  |  |  |
| Particles >14μm          | ASTM D7647   | >20       | <b>47</b>       |          |          |  |  |  |  |  |
| Particles >21μm          | ASTM D7647   | >4        | <u> </u>        |          |          |  |  |  |  |  |
| Oil Cleanliness          | ISO 4406 (c) | >16/14/11 | <b>17/16/13</b> |          |          |  |  |  |  |  |
| PrtFilter                |              |           |                 | no image | no image |  |  |  |  |  |

Customer Id: MICARL Sample No.: PH05938842 Lab Number: 05938842 Test Package: PLANT



To manage this report scan the QR code

To discuss the diagnosis or test data: Doug Bogart +1 (800)237-1369 x4016 dougb@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

| RECOMMENDED ACTIONS |        |      |         |   |  |  |  |
|---------------------|--------|------|---------|---|--|--|--|
| Action              | Status | Date | Done By | Description   |  |  |  |
| Change Filter       |        |      | ?       | We recommend you service the filters on this component. |  |  |  |
|                     |        |      |         |   |  |  |  |

# HISTORICAL DIAGNOSIS



# **OIL ANALYSIS REPORT**

# [187640-N2STV4W] BT 5164 VHP2

**Pump Hydraulic System** 

MOBIL DTE 25 (15 GAL)

# Sample Rating Trend



# **DIAGNOSIS**

### Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

All component wear rates are normal.


## Contamination

There is a high amount of particulates present in the oil.

### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

|                 |        |              |            | Jul2023               |          |          |
|-----------------|--------|--------------|------------|-----------------------|----------|----------|
| SAMPLE INFORM   | IATION | method       | limit/base | current               | history1 | history2 |
| Sample Number   |        | Client Info  |            | PH05938842            |          |          |
| Sample Date     |        | Client Info  |            | 27 Jul 2023           |          |          |
| Machine Age     | hrs    | Client Info  |            | 0                     |          |          |
| Oil Age         | hrs    | Client Info  |            | 0                     |          |          |
| Oil Changed     |        | Client Info  |            | N/A                   |          |          |
| Sample Status   |        |              |            | ABNORMAL              |          |          |
| WEAR METALS     |        | method       | limit/base | current               | history1 | history2 |
| Iron            | ppm    | ASTM D5185m  | >20        | 0                     |          |          |
| Chromium        | ppm    | ASTM D5185m  | >20        | 0                     |          |          |
| Nickel          | ppm    | ASTM D5185m  | >20        | 0                     |          |          |
| Titanium        | ppm    | ASTM D5185m  |            | 0                     |          |          |
| Silver          | ppm    | ASTM D5185m  |            | 0                     |          |          |
| Aluminum        | ppm    | ASTM D5185m  | >20        | <1                    |          |          |
| Lead            | ppm    | ASTM D5185m  | >20        | 0                     |          |          |
| Copper          | ppm    | ASTM D5185m  | >20        | 0                     |          |          |
| Tin             | ppm    | ASTM D5185m  | >20        | 0                     |          |          |
| Vanadium        | ppm    | ASTM D5185m  |            | 0                     |          |          |
| Cadmium         | ppm    | ASTM D5185m  |            | 0                     |          |          |
| ADDITIVES       |        | method       | limit/base | current               | history1 | history2 |
| Boron           | ppm    | ASTM D5185m  |            | 0                     |          |          |
| Barium          | ppm    | ASTM D5185m  |            | 0                     |          |          |
| Molybdenum      | ppm    | ASTM D5185m  |            | 0                     |          |          |
| Manganese       | ppm    | ASTM D5185m  |            | 0                     |          |          |
| Magnesium       | ppm    | ASTM D5185m  |            | 0                     |          |          |
| Calcium         | ppm    | ASTM D5185m  |            | 131                   |          |          |
| Phosphorus      | ppm    | ASTM D5185m  |            | 493                   |          |          |
| Zinc            | ppm    | ASTM D5185m  |            | 658                   |          |          |
| Sulfur          | ppm    | ASTM D5185m  |            | 7285                  |          |          |
| CONTAMINANTS    |        | method       | limit/base | current               | history1 | history2 |
| Silicon         | ppm    | ASTM D5185m  | >15        | <1                    |          |          |
| Sodium          | ppm    | ASTM D5185m  |            | 3                     |          |          |
| Potassium       | ppm    | ASTM D5185m  | >20        | 0                     |          |          |
| FLUID CLEANLIN  | ESS    | method       | limit/base | current               | history1 | history2 |
| Particles >4µm  |        | ASTM D7647   | >640       | <u>▲</u> 842          |          |          |
| Particles >6µm  |        | ASTM D7647   | >160       | <u></u> 4 370 <u></u> |          |          |
| Particles >14µm |        | ASTM D7647   | >20        | <b>47</b>             |          |          |
| Particles >21µm |        | ASTM D7647   | >4         | <u> </u>              |          |          |
| Particles >38μm |        | ASTM D7647   | >3         | 0                     |          |          |
| Particles >71µm |        | ASTM D7647   | >3         | 0                     |          |          |
| Oil Cleanliness |        | ISO 4406 (c) | >16/14/11  | <b>17/16/13</b>       |          |          |
| FLUID DEGRADA   | TION   | method       | limit/base | current               | history1 | history2 |
|                 |        |              |            |                       |          |          |

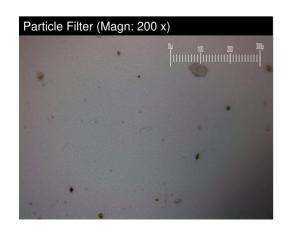


1.36

Acid Number (AN)

mg KOH/g ASTM D8045



# **OIL ANALYSIS REPORT**

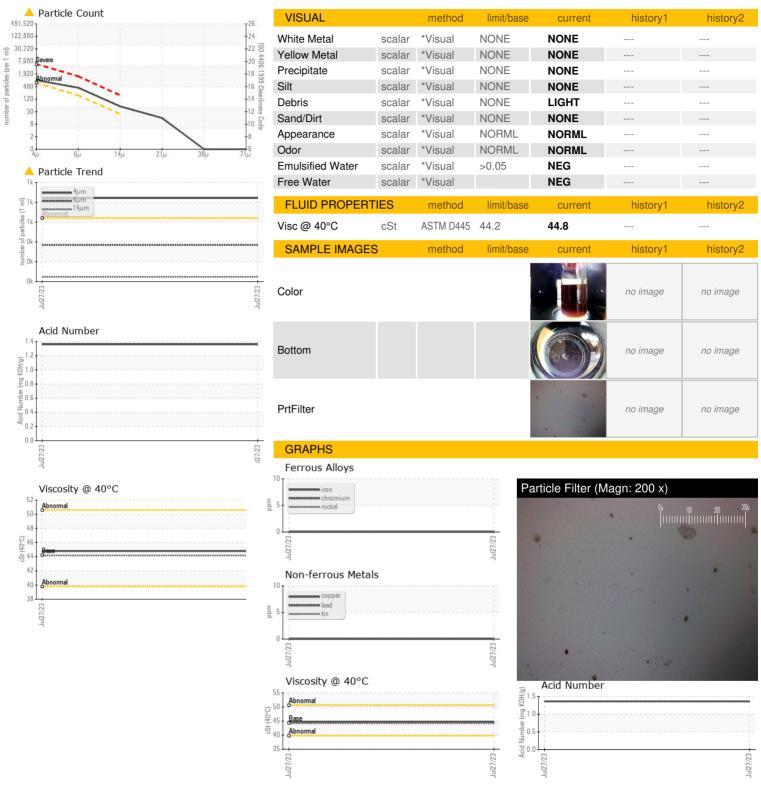





Laboratory Sample No. Lab Number

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : PH05938842

: 05938842 : 10629454

Diagnosed Diagnostician : Doug Bogart **Unique Number** Test Package : PLANT ( Additional Tests: PrtFilter )

Certificate L2367 To discuss this sample report, contact Customer Service at 1-800-237-1369. \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Received

: 30 Aug 2023

: 19 Sep 2023

MICROPORT ORTHOPEDICS INC

5677 AIRLINE RD ARLINGTON, TN US 38002

Contact: GARY HINES

gary.hines@ortho.microport.com

T: (901)831-6578