




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

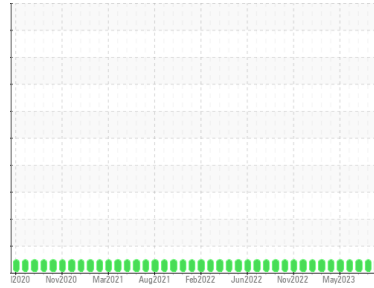

Area  
**HAPL - HYDRAULIC**  
 Machine Id  
**HAPL SCALE BREAKER HYDRAULIC UNIT (S/N 16-1100-1310)**  
 Component  
**Hydraulic System**  
 Fluid  
**SAE 10W (--- QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>RP0038407</b>	RP0034890	RP0035353
Sample Date	Client Info	<b>29 Aug 2023</b>	26 Jul 2023	28 Jun 2023
Machine Age	hrs Client Info	<b>0</b>	0	0
Oil Age	hrs Client Info	<b>0</b>	0	0
Oil Changed	Client Info	<b>N/A</b>	N/A	N/A
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## WEAR METALS

method	limit/base	current	history1	history2
Iron ppm ASTM D5185m	>20	<b>0</b>	<1	0
Chromium ppm ASTM D5185m	>20	<b>0</b>	0	0
Nickel ppm ASTM D5185m	>20	<b>0</b>	0	0
Titanium ppm ASTM D5185m		<b>0</b>	0	0
Silver ppm ASTM D5185m		<b>0</b>	0	0
Aluminum ppm ASTM D5185m	>20	<b>&lt;1</b>	0	<1
Lead ppm ASTM D5185m	>20	<b>0</b>	<1	0
Copper ppm ASTM D5185m	>20	<b>&lt;1</b>	<1	<1
Tin ppm ASTM D5185m	>20	<b>0</b>	0	0
Vanadium ppm ASTM D5185m		<b>0</b>	0	0
Cadmium ppm ASTM D5185m		<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron ppm ASTM D5185m		<b>0</b>	0	0
Barium ppm ASTM D5185m		<b>0</b>	2	0
Molybdenum ppm ASTM D5185m		<b>0</b>	0	0
Manganese ppm ASTM D5185m		<b>0</b>	0	0
Magnesium ppm ASTM D5185m		<b>0</b>	<1	4
Calcium ppm ASTM D5185m		<b>36</b>	38	36
Phosphorus ppm ASTM D5185m		<b>330</b>	336	333
Zinc ppm ASTM D5185m		<b>348</b>	371	367

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon ppm ASTM D5185m	>15	<b>1</b>	2	<1
Sodium ppm ASTM D5185m		<b>1</b>	0	1
Potassium ppm ASTM D5185m	>20	<b>0</b>	<1	<1
Water % ASTM D6304	>0.05	<b>0.006</b>	0.008	0.007
ppm Water ppm ASTM D6304	>500	<b>60.3</b>	83.4	74.4






## FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm ASTM D7647	>5000	<b>316</b>	475	149
Particles >6µm ASTM D7647	>1300	<b>78</b>	155	28
Particles >14µm ASTM D7647	>160	<b>12</b>	25	6
Particles >21µm ASTM D7647	>40	<b>4</b>	8	1
Particles >38µm ASTM D7647	>10	<b>1</b>	0	0
Particles >71µm ASTM D7647	>3	<b>0</b>	0	0
Oil Cleanliness ISO 4406 (c)	>19/17/14	<b>15/13/11</b>	16/14/12	14/12/10

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN) mg KOH/g ASTM D8045		<b>0.31</b>	0.31	0.31


# OIL ANALYSIS REPORT

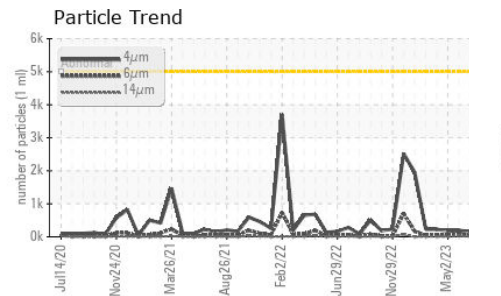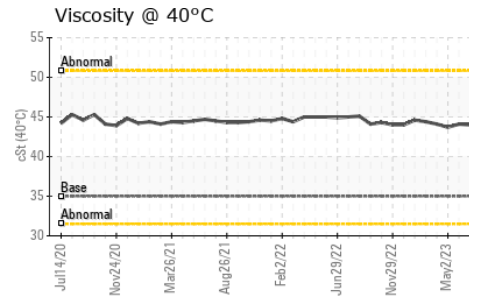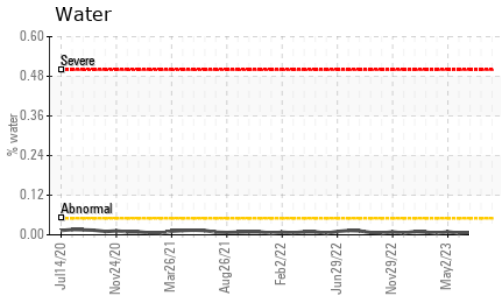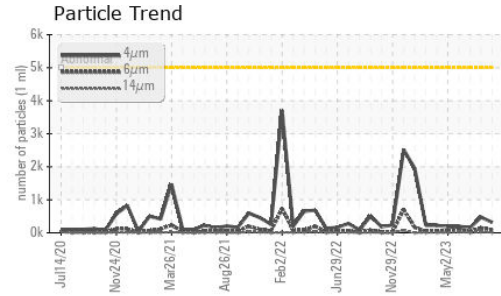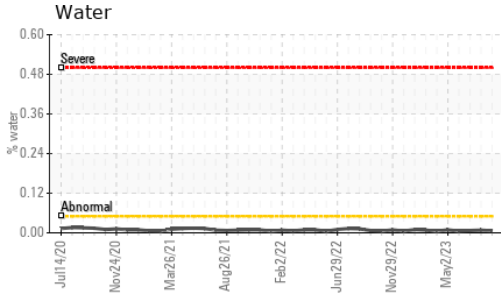






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	35.0	44.3	44.0

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

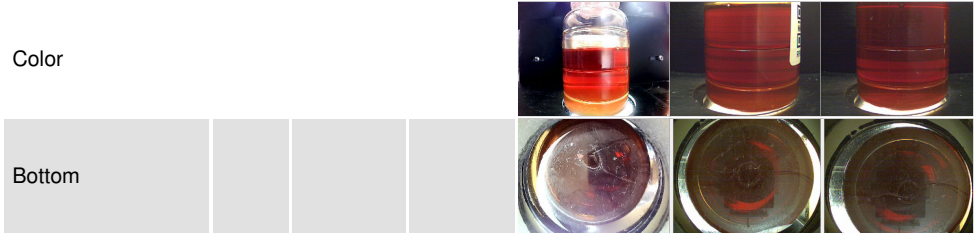

## GRAPHS

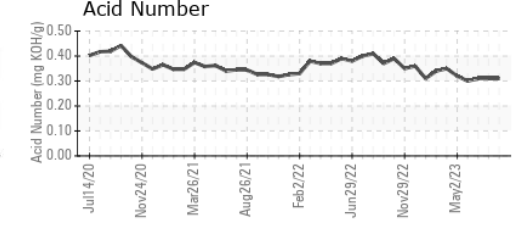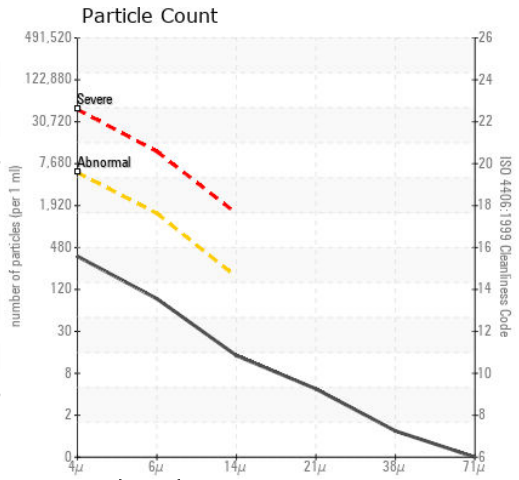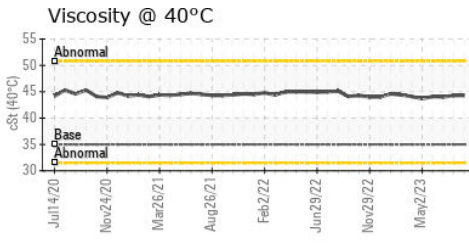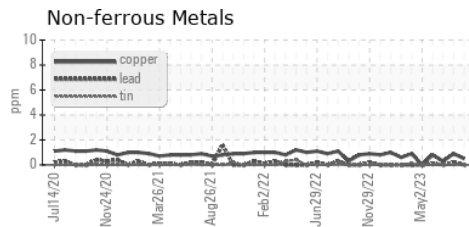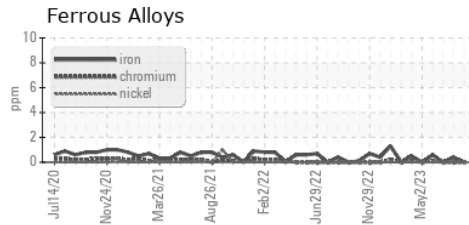

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : RP0038407  
**Lab Number** : 05938915  
**Unique Number** : 10629527  
**Test Package** : IND 2

**Received** : 30 Aug 2023  
**Diagnosed** : 01 Sep 2023  
**Diagnostician** : Doug Bogart

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**OUTOKUMPU STAINLESS USA**  
 HWY 43 N  
 CALVERT, AL  
 US 36513  
 Contact: MARIO JOHNSON  
 Mario.johnson@outokumpu.com  
 T: (251)321-4105  
 F: x: