




# PROBLEM SUMMARY

Sample Rating Trend

**WEAR**




Machine Id  
**49932626 (S/N R-08836)**  
Component  
**Hydraulic System**  
Fluid  
**MOBIL DTE 24 (--- GAL)**

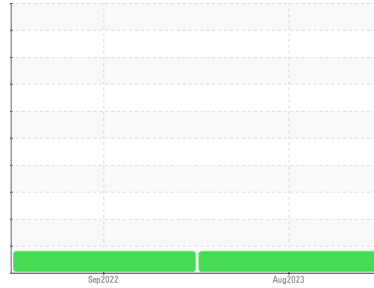

## COMPONENT CONDITION SUMMARY

### ▲ Non-ferrous Metals

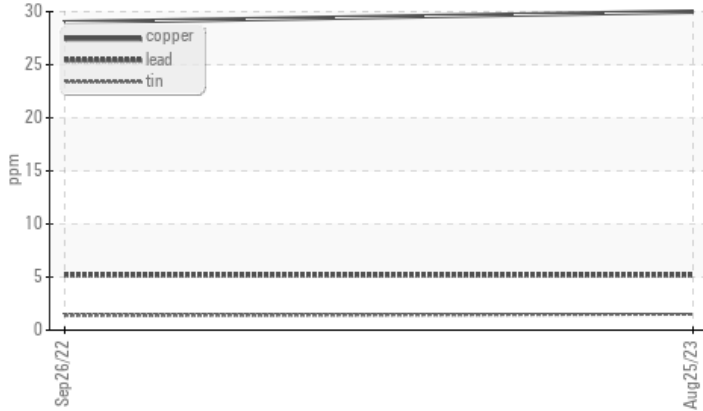

## RECOMMENDATION

No corrective action is recommended at this time.  
Resample at the next service interval to monitor.

## PROBLEMATIC TEST RESULTS

Sample Status				<b>MARGINAL</b>	<b>ABNORMAL</b>	---
Copper	ppm	ASTM D5185m	>20	▲ 30	▲ 29	---

Customer Id: TECGRENC  
Sample No.: WC0844287  
Lab Number: 05939026  
Test Package: PLANT



To manage this report scan the QR code

To discuss the diagnosis or test data:  
Doug Bogart +1 (800)237-1369 x4016  
[dougb@wearcheckusa.com](mailto:dougb@wearcheckusa.com)

To change component or sample information:  
Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Information Required	---	---	?	Please specify the brand, type, and viscosity of the oil on your next sample.

## HISTORICAL DIAGNOSIS

26 Sep 2022 Diag: Angela Borella

### WEAR



Resample at the next service interval to monitor. The copper level is abnormal. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.


view report





# OIL ANALYSIS REPORT

Sample Rating Trend

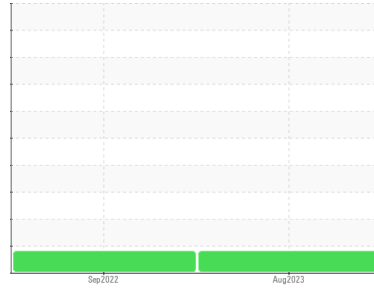

**WEAR**



Machine Id  
**49932626 (S/N R-08836)**  
 Component  
**Hydraulic System**  
 Fluid  
**MOBIL DTE 24 (--- GAL)**

## DIAGNOSIS

### ▲ Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### ▲ Wear

The copper level is abnormal. All other component wear rates are normal.

### Contamination

The amount and size of particulates present in the system are acceptable.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0844287</b>	WC0731043	---
Sample Date	Client Info		<b>25 Aug 2023</b>	26 Sep 2022	---
Machine Age	hrs	Client Info	<b>0</b>	0	---
Oil Age	hrs	Client Info	<b>0</b>	0	---
Oil Changed	Client Info		<b>N/A</b>	N/A	---
Sample Status			<b>MARGINAL</b>	ABNORMAL	---

## WEAR METALS

	method	limit/base	current	history1	history2
PQ	ASTM D8184		<b>10</b>	---	---
Iron	ppm	ASTM D5185m >20	<b>5</b>	5	---
Chromium	ppm	ASTM D5185m >20	<b>0</b>	0	---
Nickel	ppm	ASTM D5185m >20	<b>&lt;1</b>	0	---
Titanium	ppm	ASTM D5185m	<b>0</b>	0	---
Silver	ppm	ASTM D5185m	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m >20	<b>&lt;1</b>	1	---
Lead	ppm	ASTM D5185m >20	<b>5</b>	5	---
Copper	ppm	ASTM D5185m >20	<b>▲ 30</b>	<b>▲ 29</b>	---
Tin	ppm	ASTM D5185m >20	<b>2</b>	1	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>0</b>	0	---
Barium	ppm	ASTM D5185m	<b>3</b>	3	---
Molybdenum	ppm	ASTM D5185m	<b>0</b>	0	---
Manganese	ppm	ASTM D5185m	<b>0</b>	<1	---
Magnesium	ppm	ASTM D5185m	<b>4</b>	3	---
Calcium	ppm	ASTM D5185m	<b>118</b>	119	---
Phosphorus	ppm	ASTM D5185m	<b>392</b>	393	---
Zinc	ppm	ASTM D5185m	<b>584</b>	568	---
Sulfur	ppm	ASTM D5185m	<b>4836</b>	4646	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >15	<b>1</b>	1	---
Sodium	ppm	ASTM D5185m	<b>0</b>	0	---
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	1	---

## FLUID CLEANLINESS






	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	<b>466</b>	1520	---
Particles >6µm	ASTM D7647	>1300	<b>56</b>	133	---
Particles >14µm	ASTM D7647	>160	<b>11</b>	4	---
Particles >21µm	ASTM D7647	>40	<b>6</b>	1	---
Particles >38µm	ASTM D7647	>10	<b>1</b>	0	---
Particles >71µm	ASTM D7647	>3	<b>0</b>	0	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	<b>16/13/11</b>	18/14/9	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	<b>0.66</b>	0.66	---




# OIL ANALYSIS REPORT

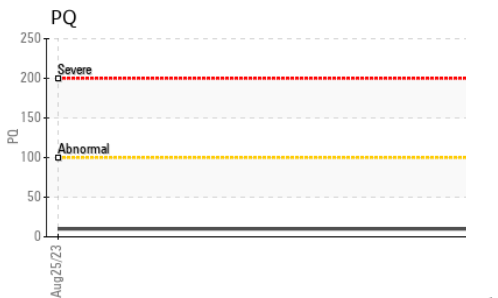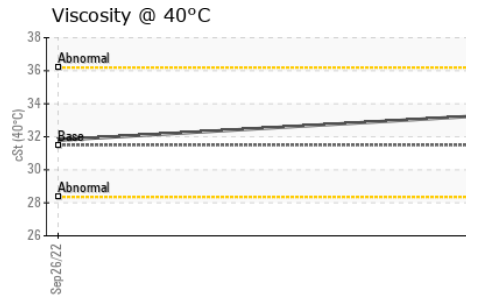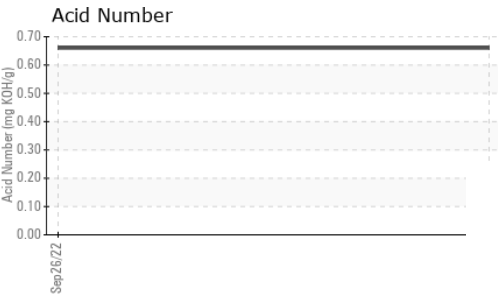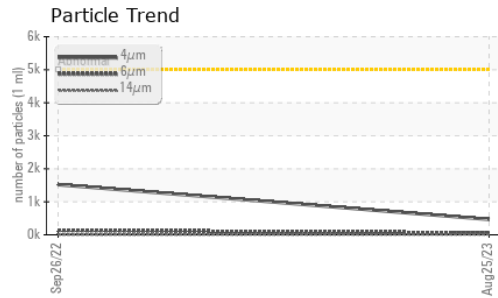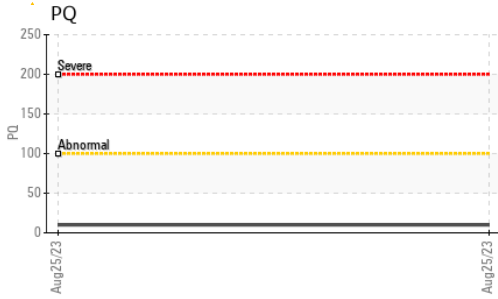





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	VLITE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	31.5	33.3	31.8

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

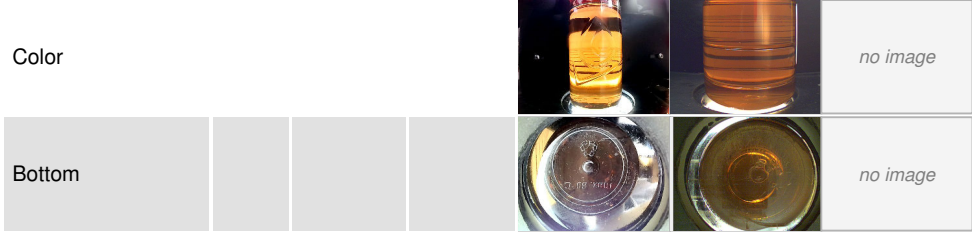

## GRAPHS

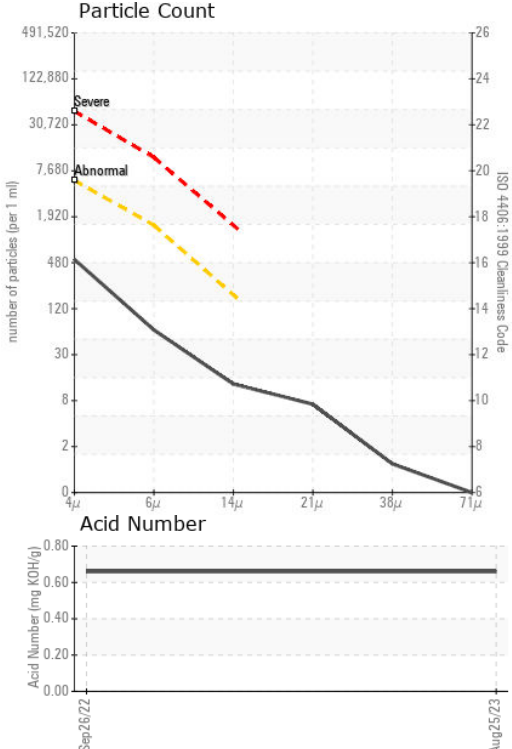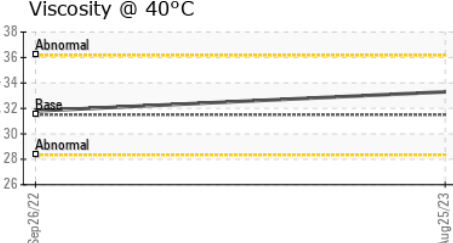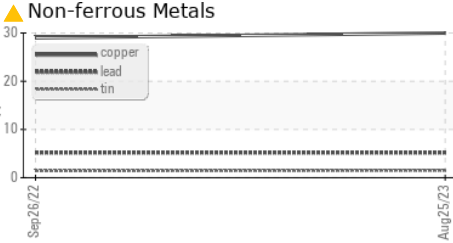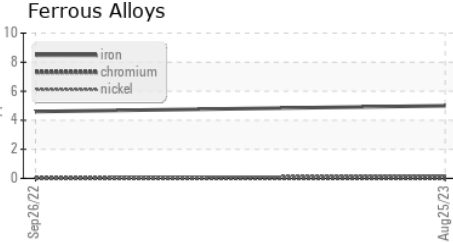

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0844287 **Received** : 30 Aug 2023  
**Lab Number** : 05939026 **Diagnosed** : 06 Sep 2023  
**Unique Number** : 10629638 **Diagnostician** : Doug Bogart  
**Test Package** : PLANT

**TE CONNECTIVITY**  
 719 PEGG RD  
 GREENSBORO, NC  
 US 27409  
 Contact: BILLIE WALLACE  
 billie.wallace@te.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: