




PROBLEM SUMMARY

Sample Rating Trend

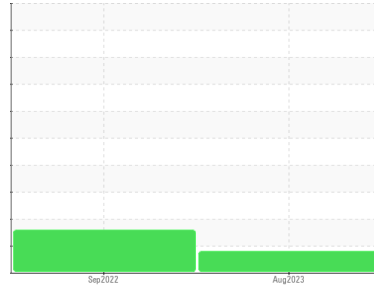


WEAR



Machine Id
49262082 (S/N 13381)
 Component
Hydraulic System
 Fluid
MOBIL DTE 24 (--- GAL)

COMPONENT CONDITION SUMMARY

▲ Non-ferrous Metals

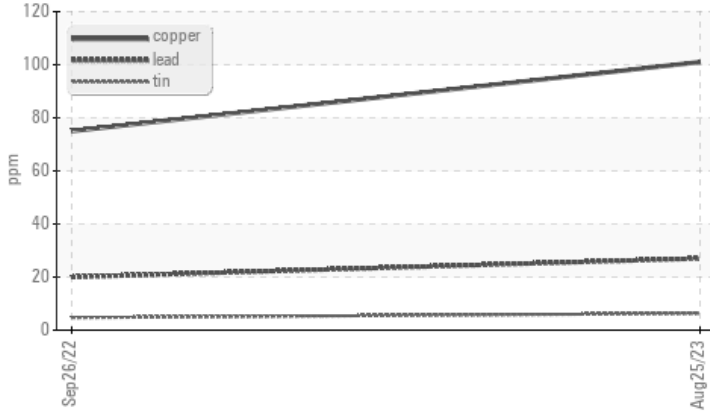

RECOMMENDATION

No corrective action is recommended at this time.
 Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

| Sample Status | | | | ABNORMAL | ABNORMAL | --- |
|---------------|-----|-------------|-----|-----------------|----------|-----|
| Copper | ppm | ASTM D5185m | >50 | ▲ 101 | ▲ 75 | --- |

Customer Id: TECGRENC
Sample No.: WC0844311
Lab Number: 05939066
Test Package: PLANT



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Doug Bogart +1 (800)237-1369 x4016
dougb@wearcheckusa.com

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

| Action | Status | Date | Done By | Description |
|----------------------|--------|------|---------|---|
| Information Required | --- | --- | ? | Please specify the brand, type, and viscosity of the oil on your next sample. |

HISTORICAL DIAGNOSIS

26 Sep 2022 Diag: Angela Borella

WEAR



No corrective action is recommended at this time. Resample at the next service interval to monitor. The copper level is abnormal. There is a high amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

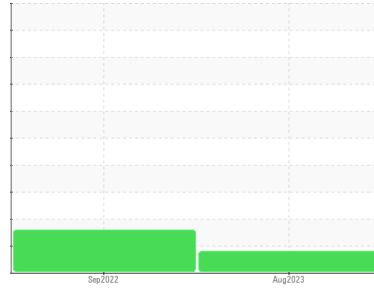

WEAR



Machine Id
49262082 (S/N 13381)

Component
Hydraulic System

Fluid
MOBIL DTE 24 (--- GAL)

DIAGNOSIS

▲ Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

▲ Wear

The copper level is abnormal. All other component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

| | method | limit/base | current | history1 | history2 |
|---------------|-------------|-------------|--------------------|-------------|----------|
| Sample Number | Client Info | | WC0844311 | WC0731057 | --- |
| Sample Date | Client Info | | 25 Aug 2023 | 26 Sep 2022 | --- |
| Machine Age | hrs | Client Info | 0 | 0 | --- |
| Oil Age | hrs | Client Info | 0 | 0 | --- |
| Oil Changed | Client Info | | N/A | N/A | --- |
| Sample Status | | | ABNORMAL | ABNORMAL | --- |

WEAR METALS

| | method | limit/base | current | history1 | history2 |
|----------|------------|------------------|--------------|-------------|----------|
| PQ | ASTM D8184 | | 12 | --- | --- |
| Iron | ppm | ASTM D5185m >150 | 4 | 3 | --- |
| Chromium | ppm | ASTM D5185m >10 | 0 | 0 | --- |
| Nickel | ppm | ASTM D5185m >10 | 2 | 0 | --- |
| Titanium | ppm | ASTM D5185m | 0 | 0 | --- |
| Silver | ppm | ASTM D5185m | 0 | 0 | --- |
| Aluminum | ppm | ASTM D5185m >25 | 0 | <1 | --- |
| Lead | ppm | ASTM D5185m >100 | 27 | 20 | --- |
| Copper | ppm | ASTM D5185m >50 | ▲ 101 | ▲ 75 | --- |
| Tin | ppm | ASTM D5185m >10 | 6 | 5 | --- |
| Vanadium | ppm | ASTM D5185m | 0 | 0 | --- |
| Cadmium | ppm | ASTM D5185m | 0 | 0 | --- |

ADDITIVES

| | method | limit/base | current | history1 | history2 |
|------------|--------|-------------|-------------|----------|----------|
| Boron | ppm | ASTM D5185m | 0 | 2 | --- |
| Barium | ppm | ASTM D5185m | 2 | 2 | --- |
| Molybdenum | ppm | ASTM D5185m | 3 | 3 | --- |
| Manganese | ppm | ASTM D5185m | 0 | 0 | --- |
| Magnesium | ppm | ASTM D5185m | 13 | 11 | --- |
| Calcium | ppm | ASTM D5185m | 198 | 189 | --- |
| Phosphorus | ppm | ASTM D5185m | 475 | 455 | --- |
| Zinc | ppm | ASTM D5185m | 716 | 662 | --- |
| Sulfur | ppm | ASTM D5185m | 4951 | 4577 | --- |

CONTAMINANTS

| | method | limit/base | current | history1 | history2 |
|-----------|--------|-----------------|--------------|----------|----------|
| Silicon | ppm | ASTM D5185m >50 | 2 | 2 | --- |
| Sodium | ppm | ASTM D5185m | 0 | 0 | --- |
| Potassium | ppm | ASTM D5185m >20 | <1 | 1 | --- |

FLUID CLEANLINESS





| | method | limit/base | current | history1 | history2 |
|-----------------|--------------|------------|-----------------|-------------------|----------|
| Particles >4µm | ASTM D7647 | >20000 | 14706 | ▲ 35058 | --- |
| Particles >6µm | ASTM D7647 | >5000 | 196 | 381 | --- |
| Particles >14µm | ASTM D7647 | >640 | 24 | 6 | --- |
| Particles >21µm | ASTM D7647 | >160 | 13 | 2 | --- |
| Particles >38µm | ASTM D7647 | >40 | 1 | 0 | --- |
| Particles >71µm | ASTM D7647 | >10 | 0 | 0 | --- |
| Oil Cleanliness | ISO 4406 (c) | >21/19/16 | 21/15/12 | ▲ 22/16/10 | --- |

FLUID DEGRADATION

| | method | limit/base | current | history1 | history2 |
|------------------|----------|------------|-------------|----------|----------|
| Acid Number (AN) | mg KOH/g | ASTM D8045 | 0.65 | 0.69 | --- |




OIL ANALYSIS REPORT

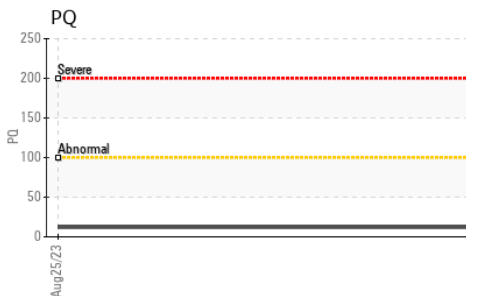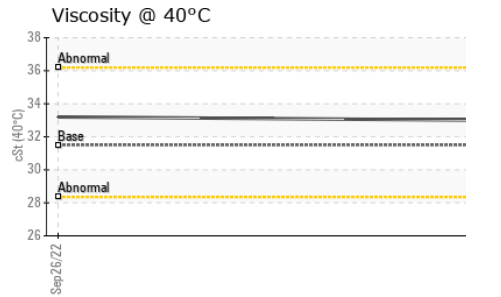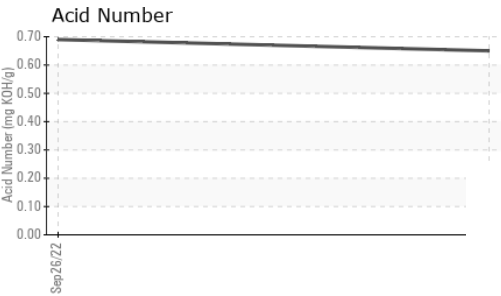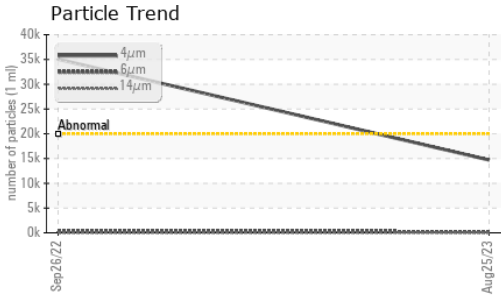






| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | --- |
| Yellow Metal | scalar | *Visual | NONE | NONE | --- |
| Precipitate | scalar | *Visual | NONE | NONE | --- |
| Silt | scalar | *Visual | NONE | NONE | --- |
| Debris | scalar | *Visual | NONE | NONE | --- |
| Sand/Dirt | scalar | *Visual | NONE | NONE | --- |
| Appearance | scalar | *Visual | NORML | NORML | --- |
| Odor | scalar | *Visual | NORML | NORML | --- |
| Emulsified Water | scalar | *Visual | >0.1 | NEG | --- |
| Free Water | scalar | *Visual | | NEG | --- |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 40°C | cSt | ASTM D445 | 31.5 | 33.0 | 33.2 |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
|---------------|--------|------------|---------|----------|----------|

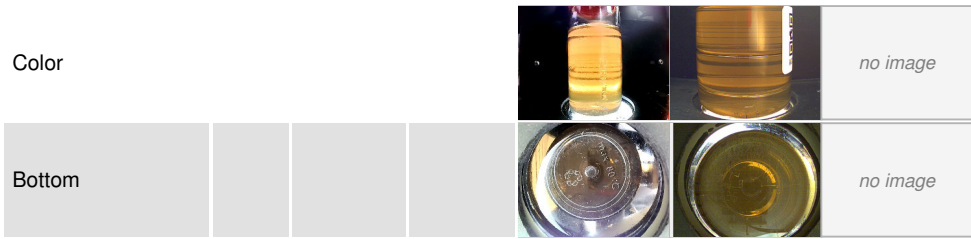

GRAPHS

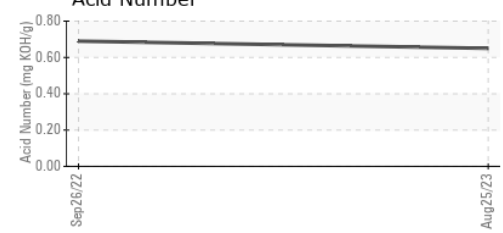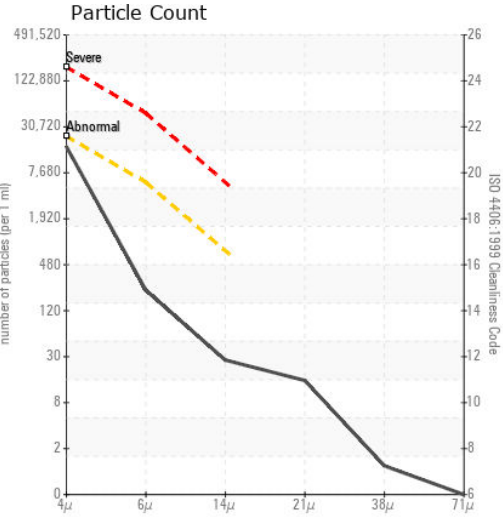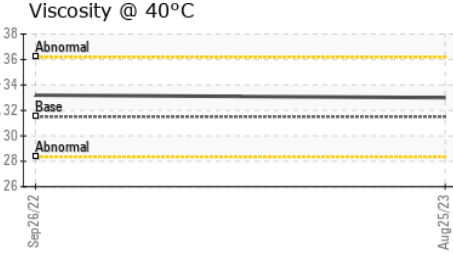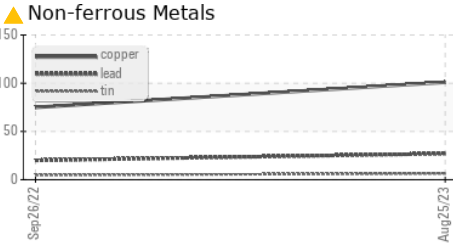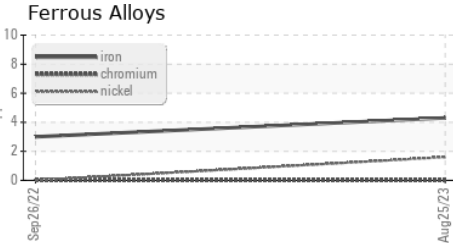

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0844311 **Received** : 30 Aug 2023
Lab Number : 05939066 **Diagnosed** : 06 Sep 2023
Unique Number : 10629678 **Diagnostician** : Doug Bogart
Test Package : PLANT

TE CONNECTIVITY
 719 PEGG RD
 GREENSBORO, NC
 US 27409
 Contact: BILLIE WALLACE
 billie.wallace@te.com

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)