




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

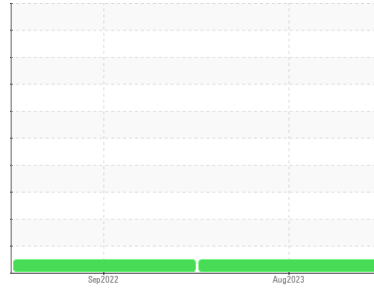

Machine Id  
**48192712 (S/N 105)**

Component  
**Hydraulic System**

Fluid  
**MOBIL DTE 24 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

|               | method      | limit/base  | current            | history1    | history2 |
|---------------|-------------|-------------|--------------------|-------------|----------|
| Sample Number | Client Info |             | <b>WC0844247</b>   | WC0731083   | ---      |
| Sample Date   | Client Info |             | <b>25 Aug 2023</b> | 26 Sep 2022 | ---      |
| Machine Age   | hrs         | Client Info | <b>0</b>           | 0           | ---      |
| Oil Age       | hrs         | Client Info | <b>0</b>           | 0           | ---      |
| Oil Changed   | Client Info |             | <b>N/A</b>         | N/A         | ---      |
| Sample Status |             |             | <b>NORMAL</b>      | NORMAL      | ---      |

## WEAR METALS

|          | method     | limit/base       | current      | history1 | history2 |
|----------|------------|------------------|--------------|----------|----------|
| PQ       | ASTM D8184 |                  | <b>7</b>     | ---      | ---      |
| Iron     | ppm        | ASTM D5185m >150 | <b>5</b>     | 4        | ---      |
| Chromium | ppm        | ASTM D5185m >10  | <b>0</b>     | 0        | ---      |
| Nickel   | ppm        | ASTM D5185m >10  | <b>&lt;1</b> | 0        | ---      |
| Titanium | ppm        | ASTM D5185m      | <b>0</b>     | <1       | ---      |
| Silver   | ppm        | ASTM D5185m      | <b>0</b>     | <1       | ---      |
| Aluminum | ppm        | ASTM D5185m >25  | <b>0</b>     | <1       | ---      |
| Lead     | ppm        | ASTM D5185m >100 | <b>2</b>     | 2        | ---      |
| Copper   | ppm        | ASTM D5185m >50  | <b>2</b>     | 3        | ---      |
| Tin      | ppm        | ASTM D5185m >10  | <b>&lt;1</b> | <1       | ---      |
| Vanadium | ppm        | ASTM D5185m      | <b>0</b>     | 0        | ---      |
| Cadmium  | ppm        | ASTM D5185m      | <b>0</b>     | 0        | ---      |

## ADDITIVES

|            | method | limit/base  | current      | history1 | history2 |
|------------|--------|-------------|--------------|----------|----------|
| Boron      | ppm    | ASTM D5185m | <b>0</b>     | 0        | ---      |
| Barium     | ppm    | ASTM D5185m | <b>2</b>     | 2        | ---      |
| Molybdenum | ppm    | ASTM D5185m | <b>&lt;1</b> | <1       | ---      |
| Manganese  | ppm    | ASTM D5185m | <b>0</b>     | <1       | ---      |
| Magnesium  | ppm    | ASTM D5185m | <b>2</b>     | 2        | ---      |
| Calcium    | ppm    | ASTM D5185m | <b>116</b>   | 116      | ---      |
| Phosphorus | ppm    | ASTM D5185m | <b>435</b>   | 453      | ---      |
| Zinc       | ppm    | ASTM D5185m | <b>16</b>    | 13       | ---      |
| Sulfur     | ppm    | ASTM D5185m | <b>1650</b>  | 1810     | ---      |

## CONTAMINANTS

|           | method | limit/base      | current      | history1 | history2 |
|-----------|--------|-----------------|--------------|----------|----------|
| Silicon   | ppm    | ASTM D5185m >50 | <b>2</b>     | 2        | ---      |
| Sodium    | ppm    | ASTM D5185m     | <b>0</b>     | 0        | ---      |
| Potassium | ppm    | ASTM D5185m >20 | <b>&lt;1</b> | <1       | ---      |

## FLUID CLEANLINESS





|                 | method       | limit/base | current         | history1 | history2 |
|-----------------|--------------|------------|-----------------|----------|----------|
| Particles >4µm  | ASTM D7647   | >20000     | <b>493</b>      | 2828     | ---      |
| Particles >6µm  | ASTM D7647   | >5000      | <b>158</b>      | 349      | ---      |
| Particles >14µm | ASTM D7647   | >640       | <b>49</b>       | 24       | ---      |
| Particles >21µm | ASTM D7647   | >160       | <b>17</b>       | 5        | ---      |
| Particles >38µm | ASTM D7647   | >40        | <b>1</b>        | 1        | ---      |
| Particles >71µm | ASTM D7647   | >10        | <b>0</b>        | 0        | ---      |
| Oil Cleanliness | ISO 4406 (c) | >21/19/16  | <b>16/14/13</b> | 19/16/12 | ---      |

## FLUID DEGRADATION

|                  | method   | limit/base | current     | history1 | history2 |
|------------------|----------|------------|-------------|----------|----------|
| Acid Number (AN) | mg KOH/g | ASTM D8045 | <b>0.40</b> | 0.133    | ---      |




# OIL ANALYSIS REPORT

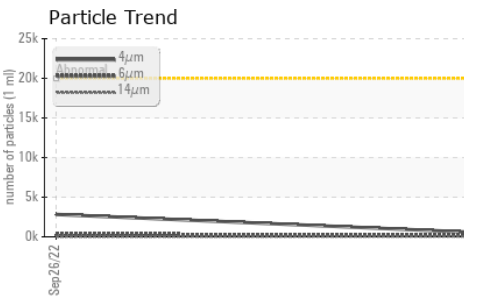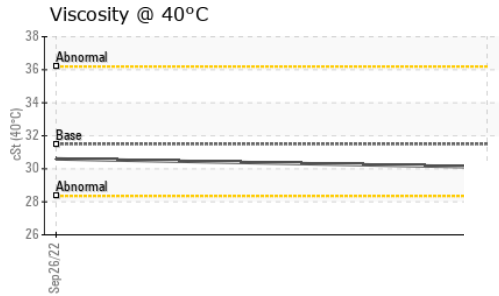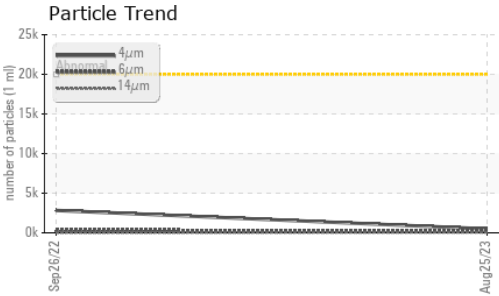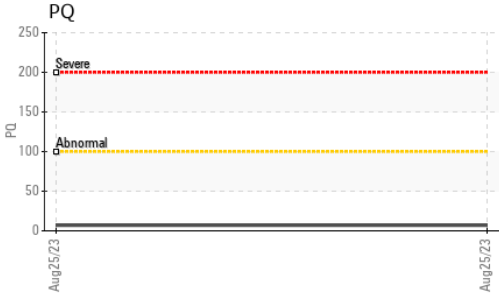






| VISUAL           | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | LIGHT    |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | NONE     |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Silt             | scalar | *Visual    | NONE    | NONE     | NONE     |
| Debris           | scalar | *Visual    | NONE    | NONE     | VLITE    |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | NONE     |
| Appearance       | scalar | *Visual    | NORML   | NORML    | NORML    |
| Odor             | scalar | *Visual    | NORML   | NORML    | NORML    |
| Emulsified Water | scalar | *Visual    | >0.1    | NEG      | NEG      |
| Free Water       | scalar | *Visual    |         | NEG      | NEG      |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 40°C      | cSt    | ASTM D445  | 31.5    | 30.1     | 30.6     |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
|---------------|--------|------------|---------|----------|----------|

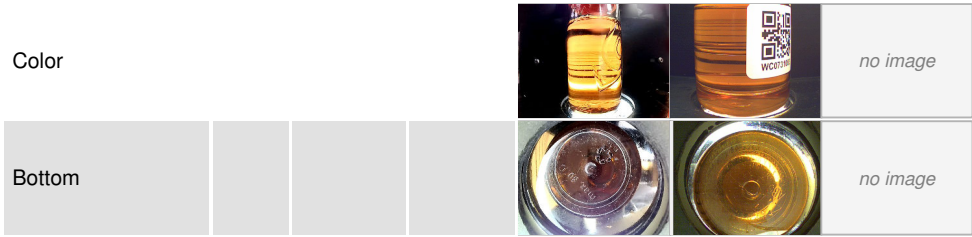

## GRAPHS

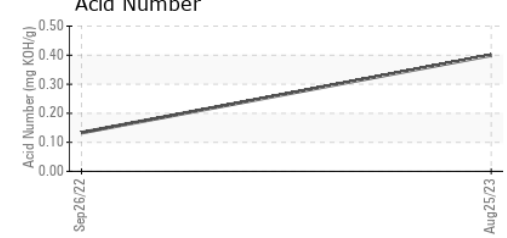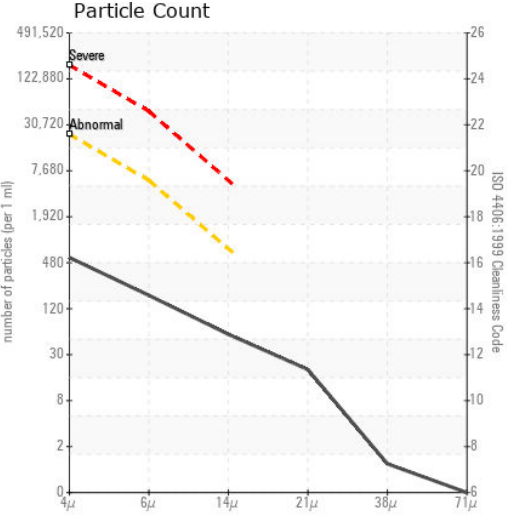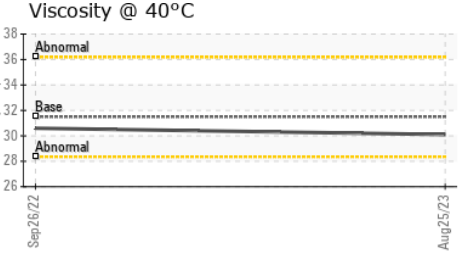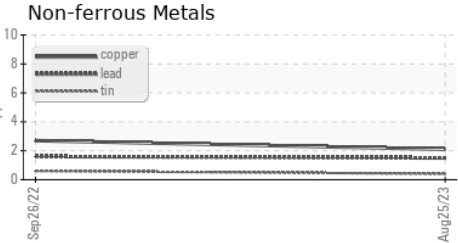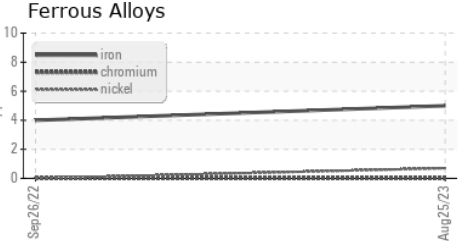

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0844247 **Received** : 30 Aug 2023  
**Lab Number** : 05939076 **Diagnosed** : 06 Sep 2023  
**Unique Number** : 10629688 **Diagnostician** : Doug Bogart  
**Test Package** : PLANT

**TE CONNECTIVITY**  
 719 PEGG RD  
 GREENSBORO, NC  
 US 27409  
 Contact: BILLIE WALLACE  
 billie.wallace@te.com  
 T:  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)