



# OIL ANALYSIS REPORT

Sample Rating Trend


**NORMAL**



Machine Id  
**48192711 (S/N 12400)**

Component  
**Hydraulic System**

Fluid  
**MOBIL DTE 24 (--- GAL)**

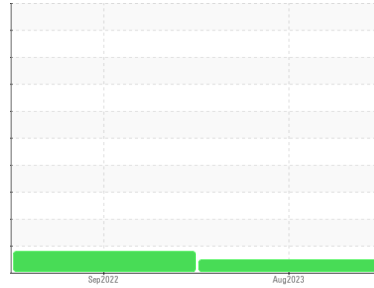

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.  
NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

### Wear

All component wear rates are normal.

### Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0844248</b>	WC0731082	---
Sample Date	Client Info		<b>25 Aug 2023</b>	26 Sep 2022	---
Machine Age	hrs	Client Info	<b>0</b>	0	---
Oil Age	hrs	Client Info	<b>0</b>	0	---
Oil Changed	Client Info		<b>N/A</b>	N/A	---
Sample Status			<b>NORMAL</b>	ABNORMAL	---

## WEAR METALS

	method	limit/base	current	history1	history2
PQ	ASTM D8184		<b>16</b>	---	---
Iron	ppm	ASTM D5185m >150	<b>10</b>	8	---
Chromium	ppm	ASTM D5185m >10	<b>0</b>	0	---
Nickel	ppm	ASTM D5185m >10	<b>&lt;1</b>	0	---
Titanium	ppm	ASTM D5185m	<b>0</b>	0	---
Silver	ppm	ASTM D5185m	<b>2</b>	2	---
Aluminum	ppm	ASTM D5185m >25	<b>0</b>	<1	---
Lead	ppm	ASTM D5185m >100	<b>9</b>	6	---
Copper	ppm	ASTM D5185m >50	<b>38</b>	▲ 28	---
Tin	ppm	ASTM D5185m >10	<b>3</b>	2	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>3</b>	6	---
Barium	ppm	ASTM D5185m	<b>2</b>	3	---
Molybdenum	ppm	ASTM D5185m	<b>8</b>	9	---
Manganese	ppm	ASTM D5185m	<b>0</b>	<1	---
Magnesium	ppm	ASTM D5185m	<b>32</b>	32	---
Calcium	ppm	ASTM D5185m	<b>234</b>	234	---
Phosphorus	ppm	ASTM D5185m	<b>471</b>	479	---
Zinc	ppm	ASTM D5185m	<b>713</b>	705	---
Sulfur	ppm	ASTM D5185m	<b>4869</b>	5107	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >50	<b>2</b>	2	---
Sodium	ppm	ASTM D5185m	<b>0</b>	0	---
Potassium	ppm	ASTM D5185m >20	<b>1</b>	1	---

## FLUID CLEANLINESS






	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>20000	<b>223</b>	1130	---
Particles >6µm	ASTM D7647	>5000	<b>35</b>	126	---
Particles >14µm	ASTM D7647	>640	<b>7</b>	7	---
Particles >21µm	ASTM D7647	>160	<b>2</b>	1	---
Particles >38µm	ASTM D7647	>40	<b>0</b>	0	---
Particles >71µm	ASTM D7647	>10	<b>0</b>	0	---
Oil Cleanliness	ISO 4406 (c)	>21/19/16	<b>15/12/10</b>	17/14/10	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	<b>0.68</b>	0.69	---




# OIL ANALYSIS REPORT

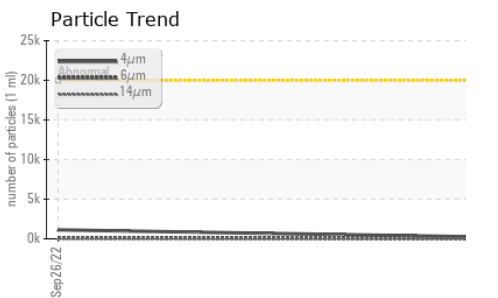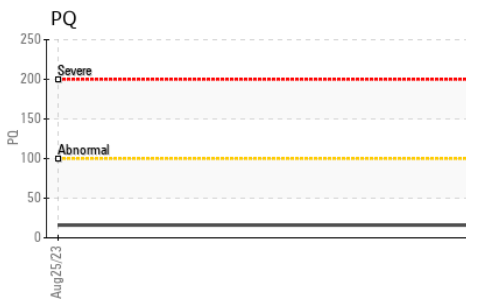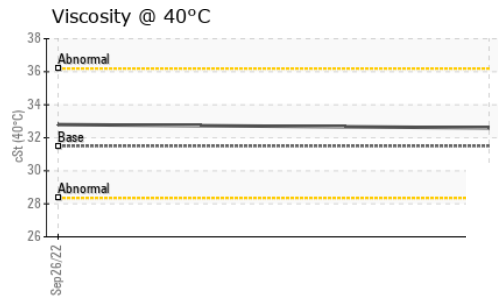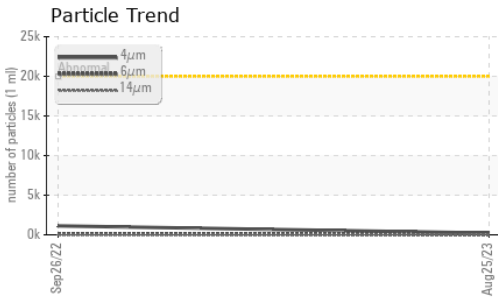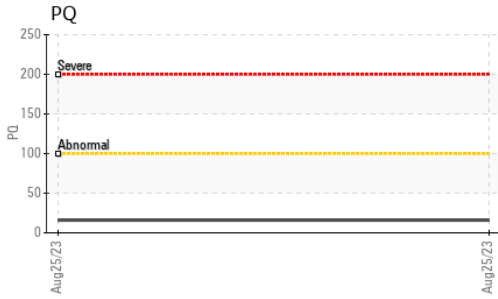





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	VLITE
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	31.5	32.6	32.8

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

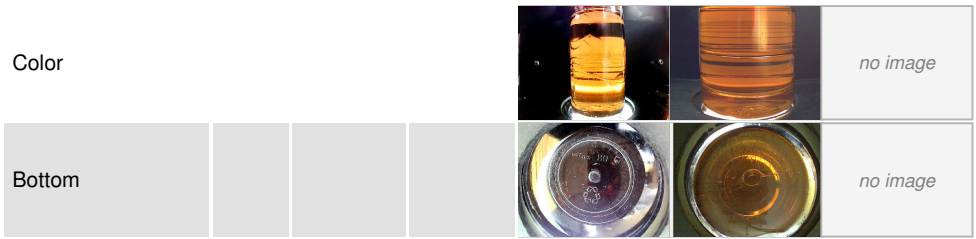

## GRAPHS

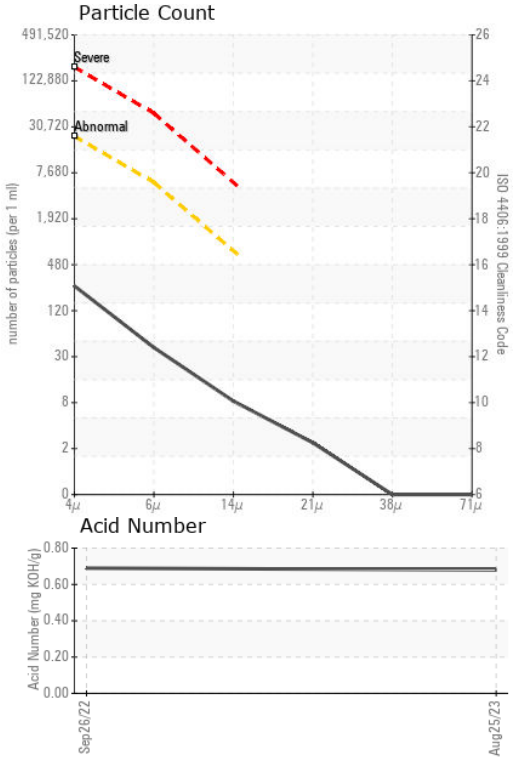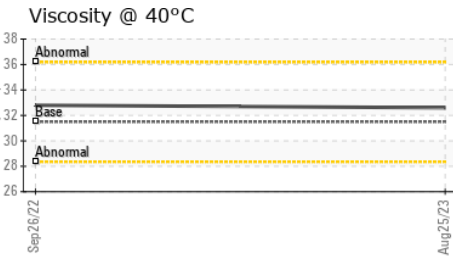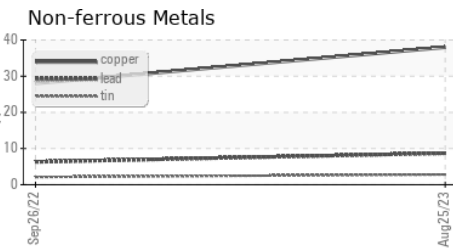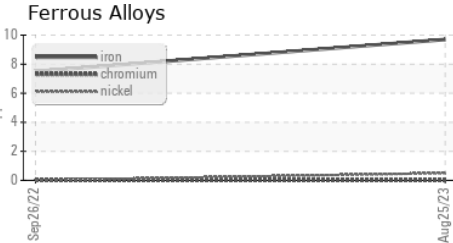

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0844248 **Received** : 30 Aug 2023  
**Lab Number** : 05939077 **Diagnosed** : 06 Sep 2023  
**Unique Number** : 10629689 **Diagnostician** : Wes Davis  
**Test Package** : PLANT

**TE CONNECTIVITY**  
 719 PEGG RD  
 GREENSBORO, NC  
 US 27409  
 Contact: BILLIE WALLACE  
 billie.wallace@te.com  
 T:  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)