




# OIL ANALYSIS REPORT

Sample Rating Trend

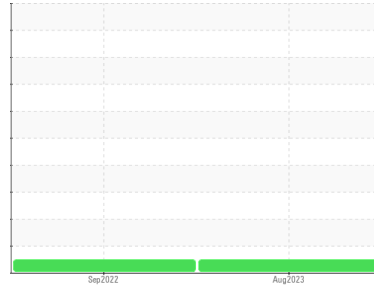

**NORMAL**



Machine Id  
**49873177 (S/N 13591)**

Component  
**Hydraulic System**

Fluid  
**MOBIL DTE 24 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.  
NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

### Wear

All component wear rates are normal.

### Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0844255</b>	WC0731051	---
Sample Date	Client Info			<b>25 Aug 2023</b>	26 Sep 2022	---
Machine Age	hrs	Client Info		<b>0</b>	0	---
Oil Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed	Client Info			<b>N/A</b>	N/A	---
Sample Status				<b>NORMAL</b>	NORMAL	---

WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184		<b>21</b>	---	---
Iron	ppm	ASTM D5185m	>150	<b>29</b>	24	---
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	---
Nickel	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	---
Titanium	ppm	ASTM D5185m		<b>0</b>	0	---
Silver	ppm	ASTM D5185m		<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>25	<b>2</b>	1	---
Lead	ppm	ASTM D5185m	>100	<b>8</b>	8	---
Copper	ppm	ASTM D5185m	>50	<b>20</b>	20	---
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	1	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>0</b>	<1	---
Barium	ppm	ASTM D5185m		<b>0</b>	3	---
Molybdenum	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185m		<b>2</b>	4	---
Calcium	ppm	ASTM D5185m		<b>136</b>	140	---
Phosphorus	ppm	ASTM D5185m		<b>477</b>	487	---
Zinc	ppm	ASTM D5185m		<b>741</b>	739	---
Sulfur	ppm	ASTM D5185m		<b>5185</b>	5608	---





CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	<b>4</b>	4	---
Sodium	ppm	ASTM D5185m		<b>0</b>	0	---
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	3	---

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>20000	<b>334</b>	476	---
Particles >6µm		ASTM D7647	>5000	<b>43</b>	62	---
Particles >14µm		ASTM D7647	>640	<b>6</b>	4	---
Particles >21µm		ASTM D7647	>160	<b>2</b>	1	---
Particles >38µm		ASTM D7647	>40	<b>0</b>	0	---
Particles >71µm		ASTM D7647	>10	<b>0</b>	0	---
Oil Cleanliness		ISO 4406 (c)	>21/19/16	<b>16/13/10</b>	16/13/9	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		<b>0.55</b>	0.94	---




# OIL ANALYSIS REPORT

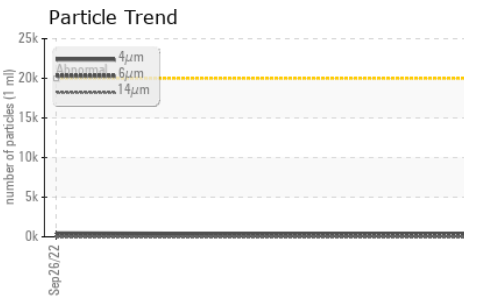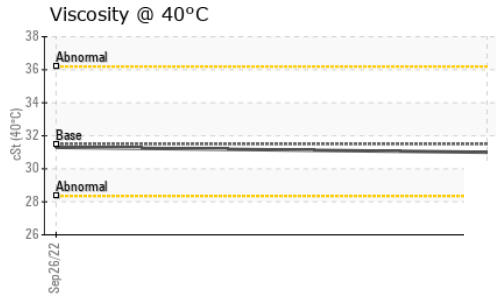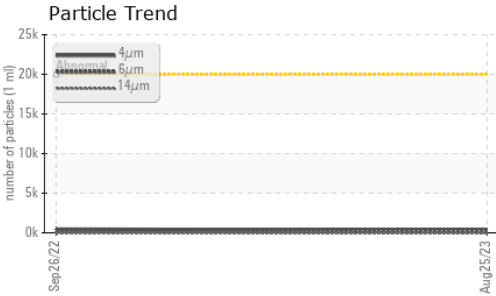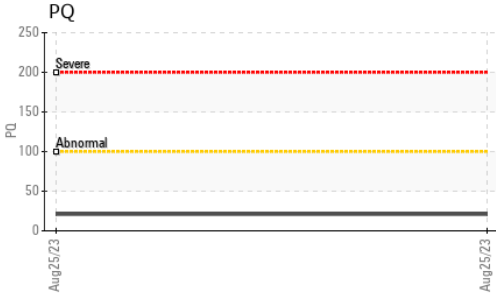






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	LIGHT
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	31.5	31.0	31.3

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

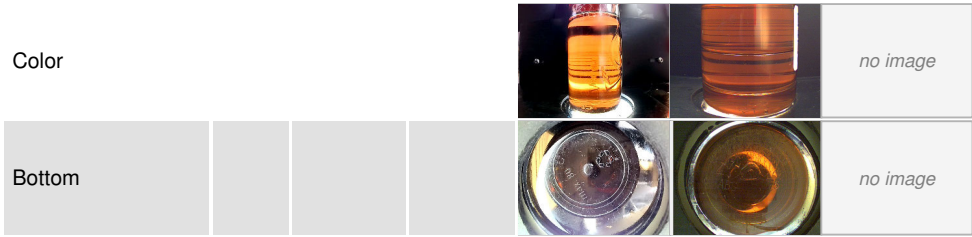

## GRAPHS

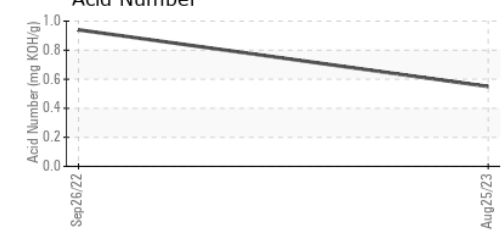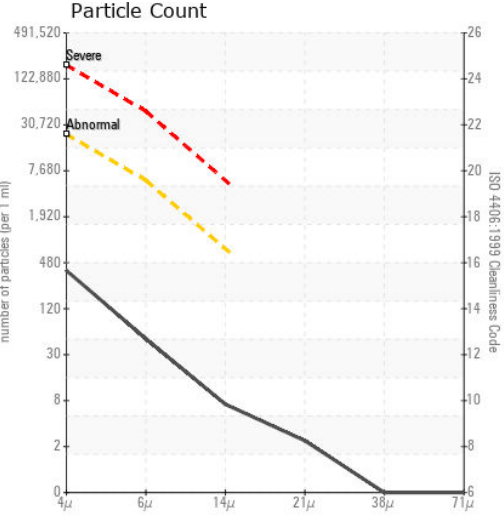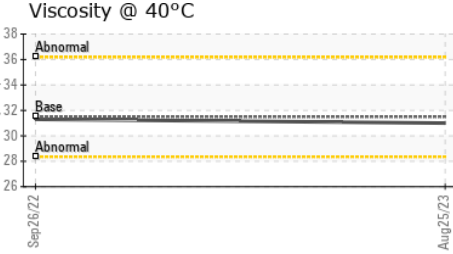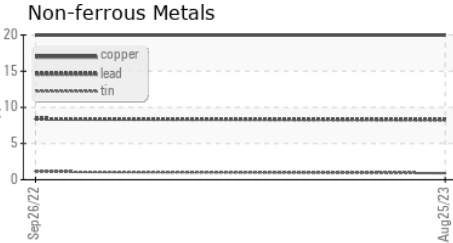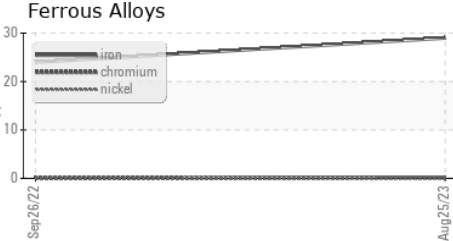

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0844255 **Received** : 30 Aug 2023  
**Lab Number** : 05939084 **Diagnosed** : 06 Sep 2023  
**Unique Number** : 10629696 **Diagnostician** : Wes Davis  
**Test Package** : PLANT

**TE CONNECTIVITY**  
 719 PEGG RD  
 GREENSBORO, NC  
 US 27409  
 Contact: BILLIE WALLACE  
 billie.wallace@te.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: