




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

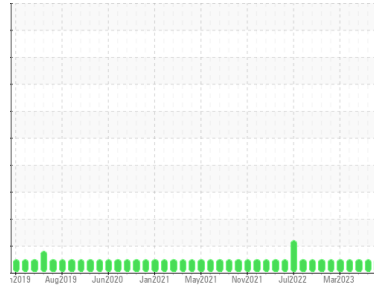

Area  
**MACHINE SHOP**  
 Machine Id  
**0-5930-0100 HERR-VOSS MANIPULATOR**  
 Component  
**Diesel Engine**  
 Fluid  
**ROYAL PURPLE MOTOR OIL 15W40 (20 QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0821648</b>	WC0821658	WC0792326
Sample Date	Client Info		<b>27 Aug 2023</b>	02 Jul 2023	19 May 2023
Machine Age	hrs	Client Info	<b>26302</b>	26107	26071
Oil Age	hrs	Client Info	<b>0</b>	0	9622
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>30</b>	16	13
Chromium	ppm	ASTM D5185m >20	<b>2</b>	1	<1
Nickel	ppm	ASTM D5185m >4	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>4</b>	2	<1
Lead	ppm	ASTM D5185m >40	<b>1</b>	<1	<1
Copper	ppm	ASTM D5185m >330	<b>4</b>	2	2
Tin	ppm	ASTM D5185m >15	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>2</b>	2	2
Barium	ppm	ASTM D5185m 0	<b>0</b>	2	0
Molybdenum	ppm	ASTM D5185m 100	<b>75</b>	71	69
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 60	<b>12</b>	14	13
Calcium	ppm	ASTM D5185m 3050	<b>3511</b>	3420	3394
Phosphorus	ppm	ASTM D5185m 1050	<b>1152</b>	1149	1100
Zinc	ppm	ASTM D5185m 1200	<b>1375</b>	1331	1315
Sulfur	ppm	ASTM D5185m 12500	<b>18953</b>	18568	15816

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>5</b>	4	4
Sodium	ppm	ASTM D5185m	<b>&lt;1</b>	0	2
Potassium	ppm	ASTM D5185m >20	<b>2</b>	2	2

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.3</b>	0.2	0.1
Nitration	Abs/cm	*ASTM D7624 >20	<b>7.2</b>	6.0	6.6
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>26.9</b>	25.8	24.7

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>17.8</b>	17.7	15.7
Base Number (BN)	mg KOH/g	ASTM D2896 10.5	<b>11.41</b>	11.23	12.38







# OIL ANALYSIS REPORT

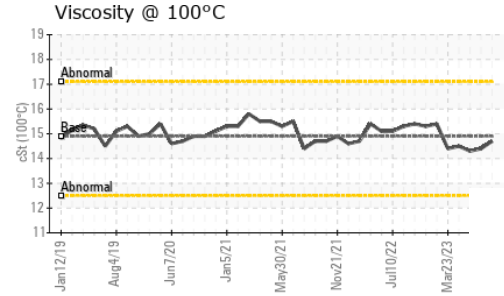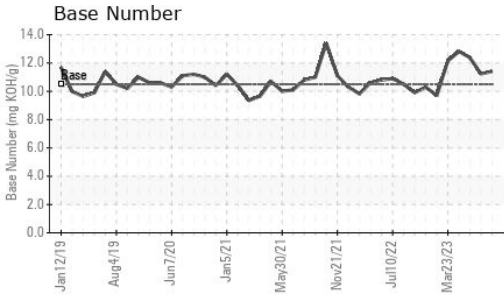

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.9	<b>14.7</b>	14.4

## GRAPHS

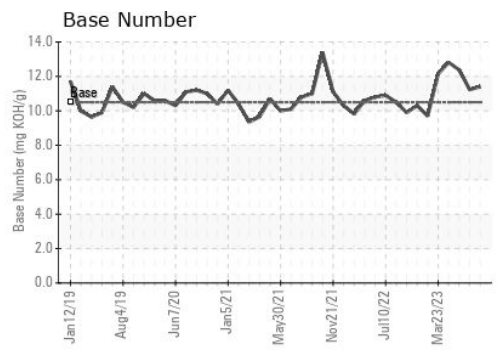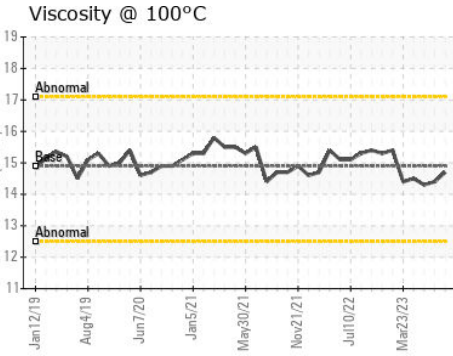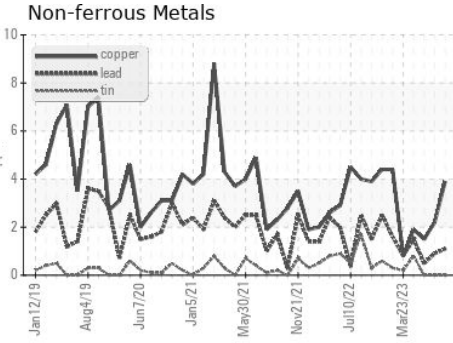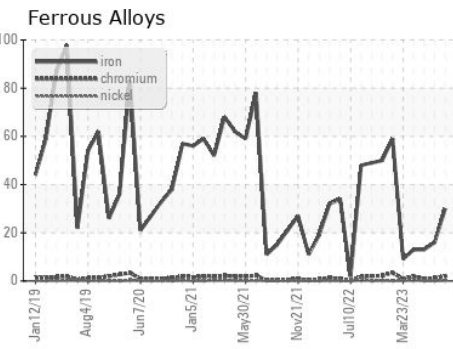

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0821648 **Received** : 30 Aug 2023  
**Lab Number** : **05939132** **Diagnosed** : 01 Sep 2023  
**Unique Number** : 10629744 **Diagnostician** : Sean Felton  
**Test Package** : IND 2

**ALLVAC - MACHINE SHOP**  
 2020 ASHCRAFT AVE  
 MONROE, NC  
 US 28110  
 Contact: mark eilerman  
 mark.eilerman@atimaterials.com  
 T: (704)292-4051  
 F: (704)282-0665

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)