




# COOLANT REPORT

Sample Rating Trend

**NORMAL**



Area  
**OKLAHOMA/102**  
 Machine Id  
**53.169L [OKLAHOMA^102]**  
 Component  
**Coolant**  
 Fluid  
**CATERPILLAR ELC (--- GAL)**

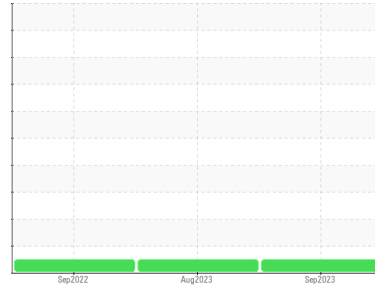

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. The fluid is suitable for further service.

### Corrosion

All metal levels are normal indicating no corrosion in the cooling system.

### Contaminants

There is no indication of any contamination in the coolant.

### Coolant Condition

Carboxylate test failed. The glycol level is acceptable. The pH level of this fluid is within the acceptable limits.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0848927</b>	WC0848944	WC0741151
Sample Date	Client Info		<b>11 Sep 2023</b>	31 Aug 2023	17 Sep 2022
Machine Age	hrs	Client Info	<b>1264</b>	1239	200
Oil Age	hrs	Client Info	<b>500</b>	500	200
Oil Changed		Client Info	<b>Not Chngd</b>	Not Chngd	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## PHYSICAL TEST RESULTS

	method	limit/base	current	history1	history2
Specific Gravity	*ASTM D1298		<b>1.065</b>	1.065	1.066
pH	Scale 0-14 ASTM D1287		<b>7.29</b>	7.33	8.40
Nitrites	ppm AP-053:2009		<b>488</b>	412	560
Reserve Alkalinity	Scale 0-20 *ASTM D1121		<b>---</b>	---	---
Percentage Glycol	% ASTM D3321		<b>48.6</b>	48.5	49.0
Freezing Point	°F ASTM D3321		<b>-31</b>	-31	-33
Total Dissolved Solids			<b>318.0</b>	357.5	361.5
Carboxylate			<b>fail</b>	pass	pass

## CORROSION INHIBITORS

	method	limit/base	current	history1	history2
Silicon	ppm ASTM D6130	0	<b>28</b>	24	19
Phosphorus	ppm ASTM D6130	0	<b>0</b>	0	31
Boron	ppm ASTM D6130	0	<b>9</b>	5	<1
Molybdenum	ppm ASTM D6130	950	<b>837</b>	935	922

## CORROSION

	method	limit/base	current	history1	history2
Iron	ppm ASTM D6130	>15	<b>&lt;1</b>	<1	0
Aluminum	ppm ASTM D6130	>10	<b>&lt;1</b>	0	0
Copper	ppm ASTM D6130	>10	<b>1</b>	1	<1
Lead	ppm ASTM D6130	>10	<b>&lt;1</b>	0	<1
Tin	ppm ASTM D6130	>10	<b>&lt;1</b>	0	<1
Zinc	ppm ASTM D6130		<b>22</b>	23	<1

## CONTAMINANTS

	method	limit/base	current	history1	history2
Chlorine	ppm ASTM D6130		<b>28</b>	43	28

## CARRIER SALTS


	method	limit/base	current	history1	history2
Sodium	ppm ASTM D6130		<b>5319</b>	5402	3006
Potassium	ppm ASTM D6130		<b>294</b>	308	169







## SCALE POTENTIAL

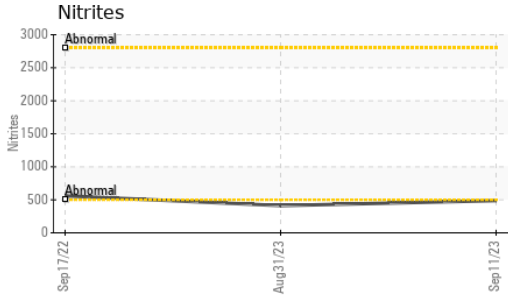	method	limit/base	current	history1	history2
Calcium	ppm ASTM D6130		<b>21</b>	21	2
Magnesium	ppm ASTM D6130		<b>3</b>	3	2









# COOLANT REPORT



VISUAL	method	limit/base	current	history1	history2
Coolant Color	*Visual		<b>Red</b>	Red	Red
Coolant Appearance	*Visual	Clear	<b>normal</b>	normal	normal
Color					
Bottom					

## GRAPHS

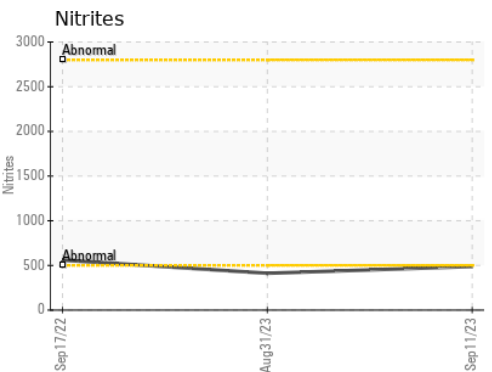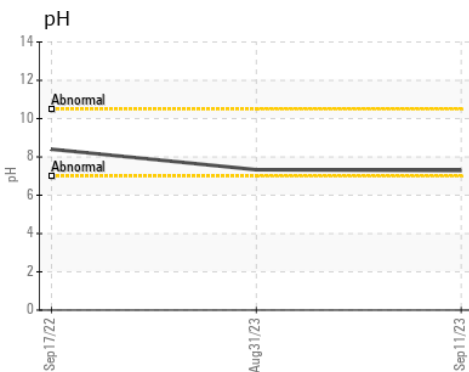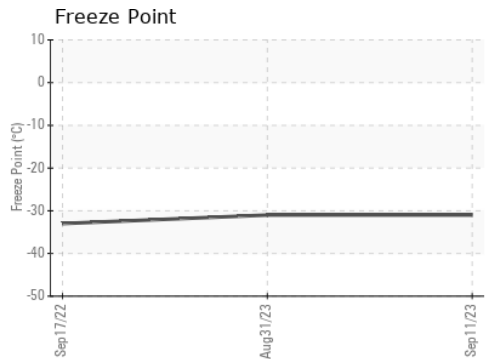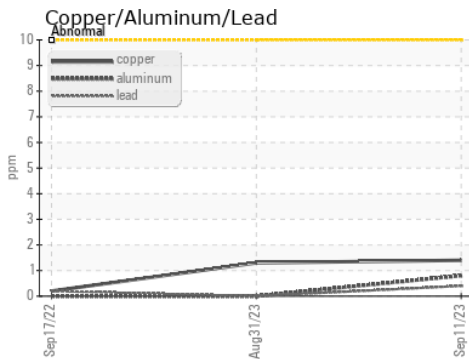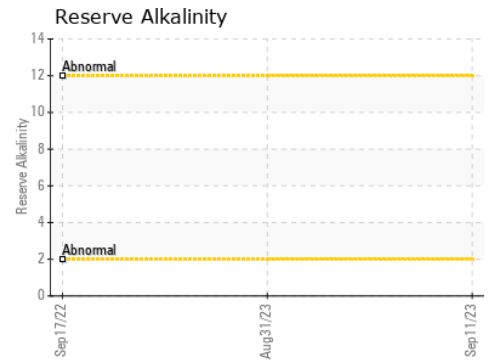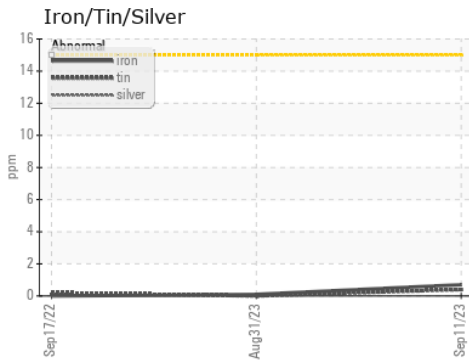

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0848927      **Received** : 22 Sep 2023  
**Lab Number** : 05958918      **Diagnosed** : 26 Sep 2023  
**Unique Number** : 10660131      **Diagnostician** : Jonathan Hester  
**Test Package** : COOL- ( Additional Tests: COOL, ICP )

**SHERWOOD CONSTRUCTION CO INC**  
 3219 WEST MAY ST  
 WICHITA, KS  
 US 67213  
 Contact: DOUG KING  
 Doug.King@sherwood.net

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: