




# PROBLEM SUMMARY

## Sample Rating Trend

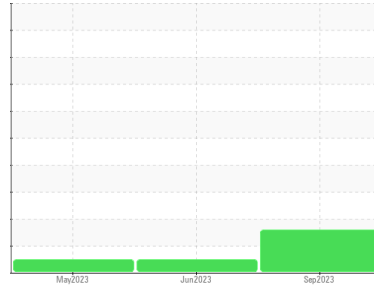


ISO



Machine Id  
**FLIGHT SIMULATOR SAAB 2000**  
 Component  
**Hydraulic System**  
 Fluid  
**SHELL TELLUS 32 (220 GAL)**

## COMPONENT CONDITION SUMMARY

### ▲ Particle Trend

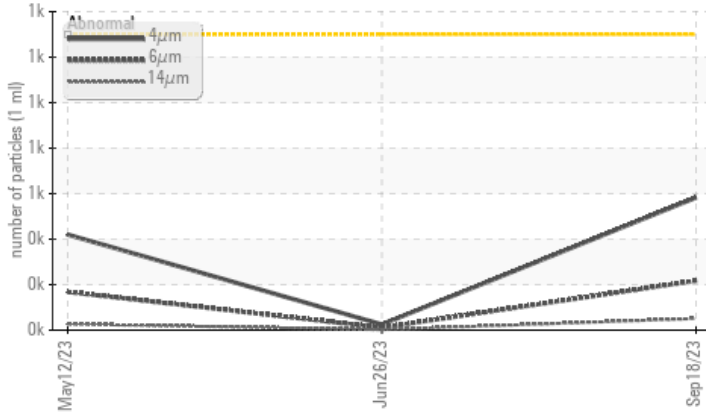

## RECOMMENDATION

No corrective action is recommended at this time.  
 Resample at the next service interval to monitor.

## PROBLEMATIC TEST RESULTS

Sample Status			ATTENTION	NORMAL	NORMAL
Particles >14µm	ASTM D7647	>40	▲ 51	2	27
Particles >21µm	ASTM D7647	>10	▲ 26	0	5
Particles >38µm	ASTM D7647	>3	▲ 4	0	0
Oil Cleanliness	ISO 4406 (c)	>17/15/12	▲ 16/15/13	12/11/9	16/15/12
PrtFilter					

Customer Id: SIMORL  
 Sample No.: PH0000188  
 Lab Number: 05959068  
 Test Package: PLANT



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Doug Bogart +1 (800)237-1369 x4016  
[dougb@wearcheckusa.com](mailto:dougb@wearcheckusa.com)

To change component or sample information:  
 Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

*There are no recommended actions for this sample.*

## HISTORICAL DIAGNOSIS

### 26 Jun 2023 Diag: Angela Borella

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



---

### 12 May 2023 Diag: Kevin Marson

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


view report





# OIL ANALYSIS REPORT

## Sample Rating Trend

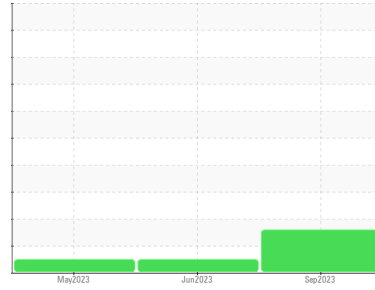

ISO



Machine Id  
**FLIGHT SIMULATOR SAAB 2000**

Component  
**Hydraulic System**

Fluid  
**SHELL TELLUS 32 (220 GAL)**

### DIAGNOSIS

#### ▲ Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### ▲ Contamination

There is a moderate amount of particulates present in the oil. The system cleanliness is above the acceptable limit for the target ISO 4406 cleanliness code.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>PH0000188</b>	PH0000543	PH0000559
Sample Date	Client Info	<b>18 Sep 2023</b>	26 Jun 2023	12 May 2023
Machine Age	hrs	Client Info	0	0
Oil Age	hrs	Client Info	0	0
Oil Changed	Client Info	<b>Not Changed</b>	N/A	N/A
Sample Status		<b>ATTENTION</b>	NORMAL	NORMAL

### WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >20	<1	0	0
Chromium	ppm	ASTM D5185m >20	0	0	0
Nickel	ppm	ASTM D5185m >20	0	<1	0
Titanium	ppm	ASTM D5185m	0	0	0
Silver	ppm	ASTM D5185m	0	0	0
Aluminum	ppm	ASTM D5185m >20	0	<1	0
Lead	ppm	ASTM D5185m >20	0	0	0
Copper	ppm	ASTM D5185m >20	4	4	4
Tin	ppm	ASTM D5185m >20	0	0	0
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

### ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	0	0	0
Barium	ppm	ASTM D5185m	0	0	0
Molybdenum	ppm	ASTM D5185m	<1	<1	0
Manganese	ppm	ASTM D5185m	0	<1	0
Magnesium	ppm	ASTM D5185m 11	25	26	14
Calcium	ppm	ASTM D5185m 35	47	50	53
Phosphorus	ppm	ASTM D5185m 259	253	273	248
Zinc	ppm	ASTM D5185m 277	295	310	255
Sulfur	ppm	ASTM D5185m 1865	958	1157	937

### CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >15	<1	0	<1
Sodium	ppm	ASTM D5185m	0	<1	1
Potassium	ppm	ASTM D5185m >20	<1	<1	0


### FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >1300	<b>583</b>	25	420
Particles >6µm	ASTM D7647 >320	<b>217</b>	11	168
Particles >14µm	ASTM D7647 >40	▲ <b>51</b>	2	27
Particles >21µm	ASTM D7647 >10	▲ <b>26</b>	0	5
Particles >38µm	ASTM D7647 >3	▲ <b>4</b>	0	0
Particles >71µm	ASTM D7647 >3	<b>1</b>	0	0
Oil Cleanliness	ISO 4406 (c) >17/15/12	▲ <b>16/15/13</b>	12/11/9	16/15/12

### FLUID DEGRADATION





method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045 0.32	<b>0.30</b>	0.34	0.29

Particle Filter (Magn: 200 x)

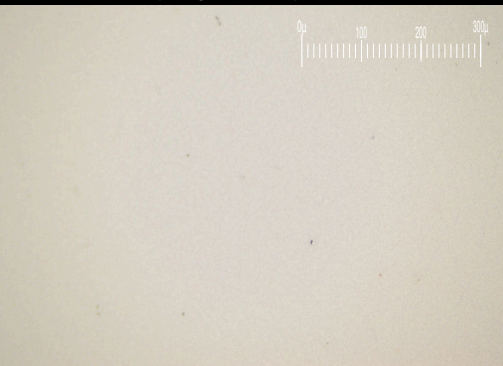



# OIL ANALYSIS REPORT

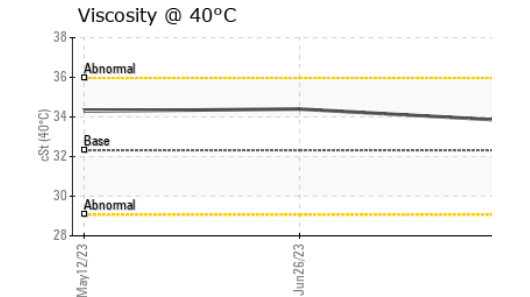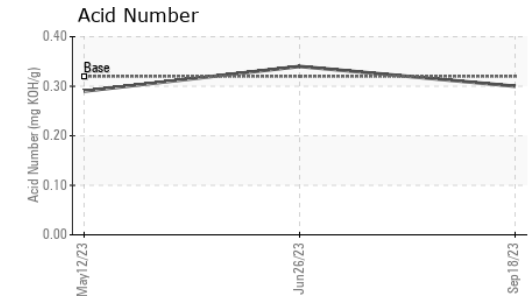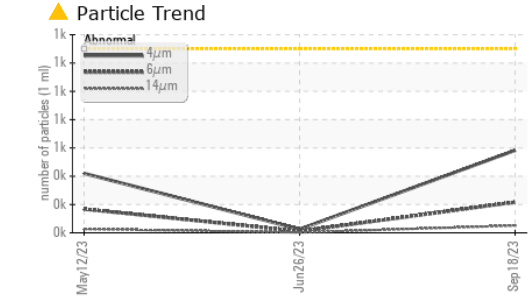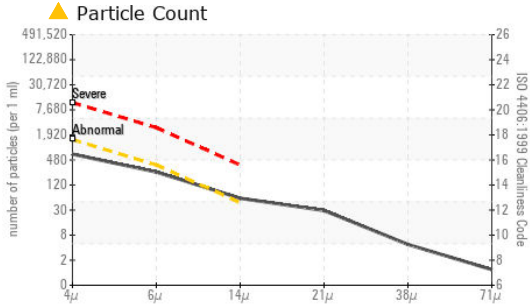


**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PH0000188 **Received** : 22 Sep 2023  
**Lab Number** : 05959068 **Diagnosed** : 28 Sep 2023  
**Unique Number** : 10660281 **Diagnostician** : Doug Bogart  
**Test Package** : PLANT ( Additional Tests: PrtFilter )

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	32.32	33.8	34.4

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					
PrtFilter					

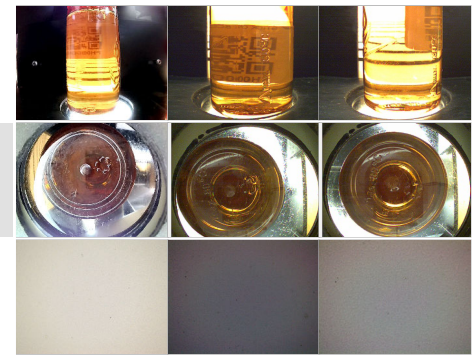

## GRAPHS

