




OIL ANALYSIS REPORT

Sample Rating Trend

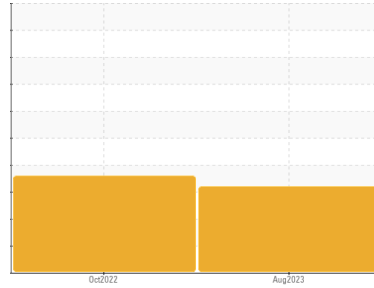

WEAR



Area
PLOGER
 Machine Id
6181 - PLOGER
 Component
Transmission (Manual)
 Fluid
NOT GIVEN (--- GAL)

DIAGNOSIS

▲ Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

▲ Wear

The aluminum level is abnormal. All other component wear rates are normal.

▲ Contamination

There is a high amount of particulates present in the fluid.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0853871	WC0765848	---
Sample Date	Client Info		10 Aug 2023	25 Oct 2022	---
Machine Age	mls	Client Info	613213	549633	---
Oil Age	mls	Client Info	0	0	---
Oil Changed	Client Info		N/A	N/A	---
Sample Status			ABNORMAL	ABNORMAL	---

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>200	193	69	---
Chromium	ppm	ASTM D5185m	>5	3	1	---
Nickel	ppm	ASTM D5185m	>5	<1	0	---
Titanium	ppm	ASTM D5185m		<1	<1	---
Silver	ppm	ASTM D5185m	>7	0	0	---
Aluminum	ppm	ASTM D5185m	>25	▲ 39	▲ 33	---
Lead	ppm	ASTM D5185m	>45	<1	<1	---
Copper	ppm	ASTM D5185m	>225	51	43	---
Tin	ppm	ASTM D5185m	>10	<1	<1	---
Vanadium	ppm	ASTM D5185m		0	0	---
Cadmium	ppm	ASTM D5185m		0	0	---

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		153	268	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		4	8	---
Manganese	ppm	ASTM D5185m		34	19	---
Magnesium	ppm	ASTM D5185m		1	1	---
Calcium	ppm	ASTM D5185m		190	212	---
Phosphorus	ppm	ASTM D5185m		1286	1434	---
Zinc	ppm	ASTM D5185m		21	11	---
Sulfur	ppm	ASTM D5185m		878	1421	---

CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>125	39	▲ 82	---
Sodium	ppm	ASTM D5185m		1	0	---
Potassium	ppm	ASTM D5185m	>20	2	2	---
Water	%	ASTM D6304	>0.1	0.098	0.087	---
ppm Water	ppm	ASTM D6304	>1000	987.9	877.0	---

FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>10000	▲ 274037	▲ 180073	---
Particles >6µm	ASTM D7647	>2500	▲ 227428	▲ 67948	---
Particles >14µm	ASTM D7647	>320	▲ 60831	144	---
Particles >21µm	ASTM D7647	>80	▲ 12030	9	---
Particles >38µm	ASTM D7647	>20	▲ 49	0	---
Particles >71µm	ASTM D7647	>4	2	0	---
Oil Cleanliness	ISO 4406 (c)	>20/18/15	▲ 25/25/23	▲ 25/23/14	---


FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045		4.36	5.00	---




OIL ANALYSIS REPORT


Particle Trend

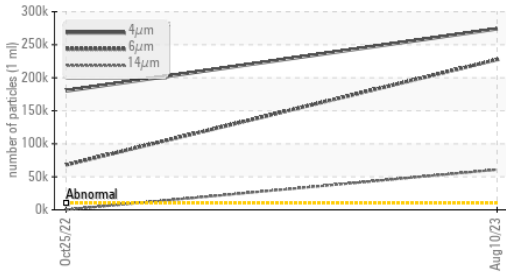


Aluminum (ppm)

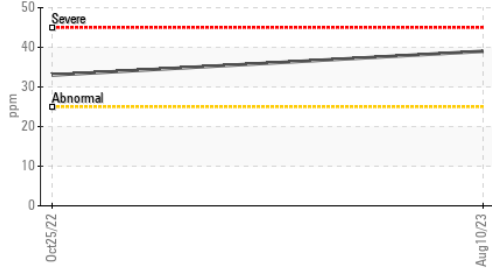


Water (KF)

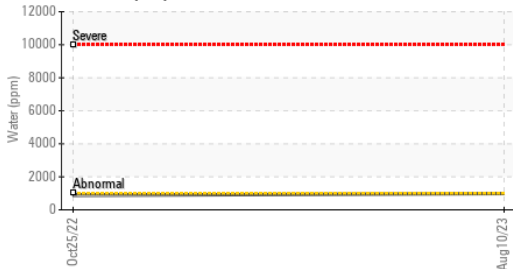

Viscosity @ 100°C

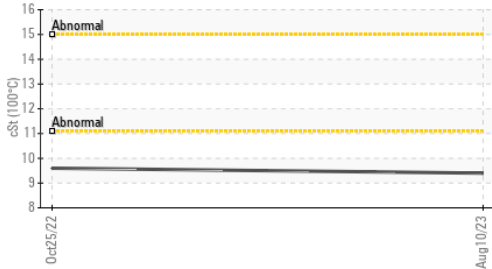


Water (KF)

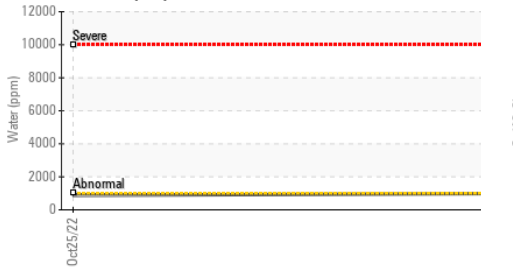

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---
Free Water	scalar	*Visual		NEG	---


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	54.8	56.1	---
Visc @ 100°C	cSt	ASTM D445	9.4	9.6	---
Viscosity Index (VI)	Scale	ASTM D2270	155	156	---

SAMPLE IMAGES

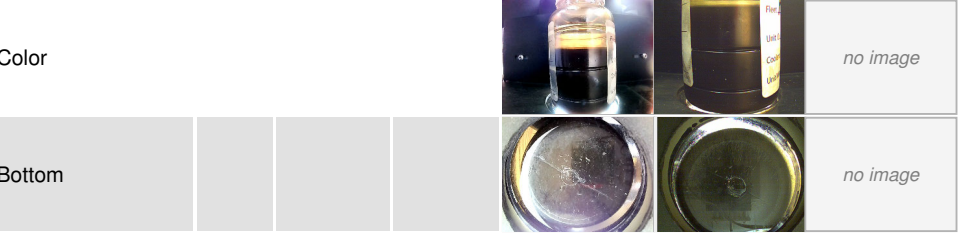


GRAPHS


Ferrous Alloys

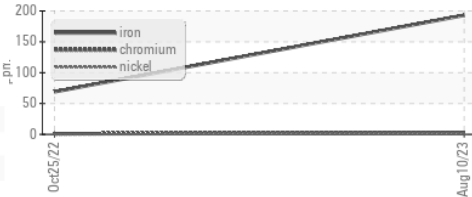


Non-ferrous Metals

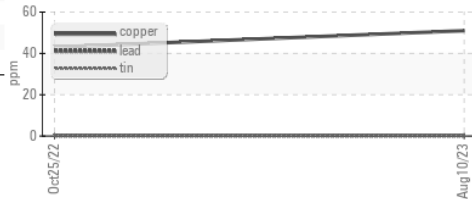

Viscosity @ 40°C

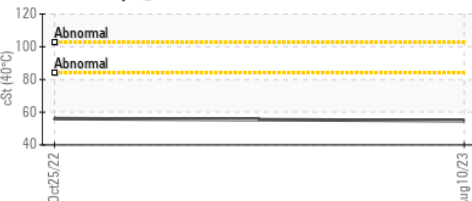

Particle Count

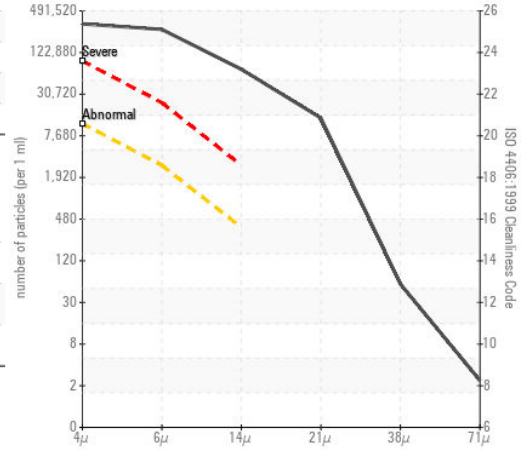

Acid Number



Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0853871 **Received** : 22 Sep 2023
Lab Number : 05959072 **Diagnosed** : 26 Sep 2023
Unique Number : 10660285 **Diagnostician** : Jonathan Hester
Test Package : MOB 2 (Additional Tests: KF, KV100, PrtCount, VI)

BASF - GIANNA CREDAROLI
 500 WHITE PLAINS RD
 TARRYTOWN, NY
 US 10591
 Contact: GIANNA CREDAROLI
 gianna.credaroli@basf.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)