




OIL ANALYSIS REPORT

Sample Rating Trend

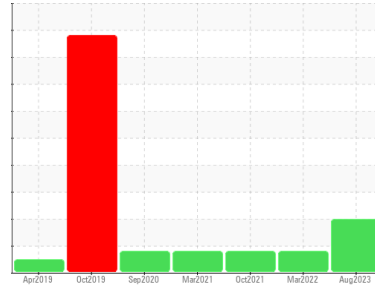

WEAR



Area
METRO
 Machine Id
METRO 20010
 Component
Transmission (Manual)
 Fluid
GEAR OIL SAE 75W90 (--- GAL)

DIAGNOSIS

▲ Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

▲ Wear

The aluminum level has decreased, but is still abnormal.

▲ Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the fluid.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0853874	WC0682398	WC0631726
Sample Date	Client Info		30 Aug 2023	11 Mar 2022	31 Oct 2021
Machine Age	mls	Client Info	416242	261139	231108
Oil Age	mls	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			ABNORMAL	MARGINAL	ABNORMAL

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >200	146	133	110
Chromium	ppm	ASTM D5185m >5	<1	<1	<1
Nickel	ppm	ASTM D5185m >5	0	0	<1
Titanium	ppm	ASTM D5185m	0	0	0
Silver	ppm	ASTM D5185m >7	0	0	<1
Aluminum	ppm	ASTM D5185m >25	▲ 65	▲ 71	▲ 71
Lead	ppm	ASTM D5185m >45	<1	<1	<1
Copper	ppm	ASTM D5185m >225	2	4	5
Tin	ppm	ASTM D5185m >10	8	8	7
Antimony	ppm	ASTM D5185m	---	---	0
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	<1

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 400	2	8	11
Barium	ppm	ASTM D5185m 200	<1	0	0
Molybdenum	ppm	ASTM D5185m 12	1	<1	<1
Manganese	ppm	ASTM D5185m	34	25	22
Magnesium	ppm	ASTM D5185m 12	5	6	6
Calcium	ppm	ASTM D5185m 150	16	38	38
Phosphorus	ppm	ASTM D5185m 1650	982	943	842
Zinc	ppm	ASTM D5185m 125	22	17	19
Sulfur	ppm	ASTM D5185m 22500	13304	9313	9770

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >125	10	10	7
Sodium	ppm	ASTM D5185m	<1	0	<1
Potassium	ppm	ASTM D5185m >20	<1	2	<1
Water	%	ASTM D6304 >0.1	0.009	0.005	0.010
ppm Water	ppm	ASTM D6304 >1000	93.0	54.7	101.6

FLUID CLEANLINESS






	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>10000	▲ 161818	---	---
Particles >6µm	ASTM D7647	>2500	▲ 32556	---	---
Particles >14µm	ASTM D7647	>320	186	---	---
Particles >21µm	ASTM D7647	>80	42	---	---
Particles >38µm	ASTM D7647	>20	2	---	---
Particles >71µm	ASTM D7647	>4	0	---	---
Oil Cleanliness	ISO 4406 (c)	>20/18/15	▲ 25/22/15	---	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 2.00	1.01	1.10	1.117




OIL ANALYSIS REPORT

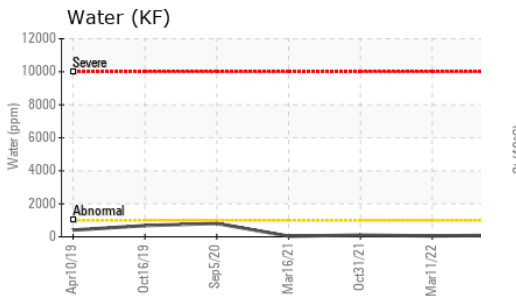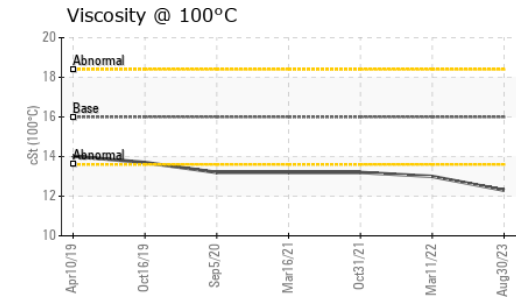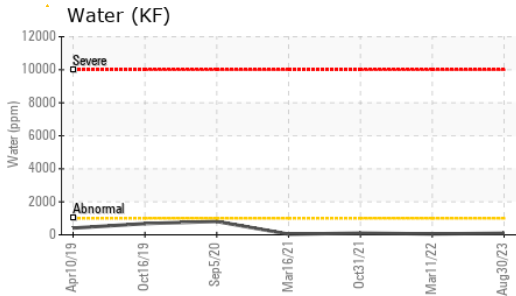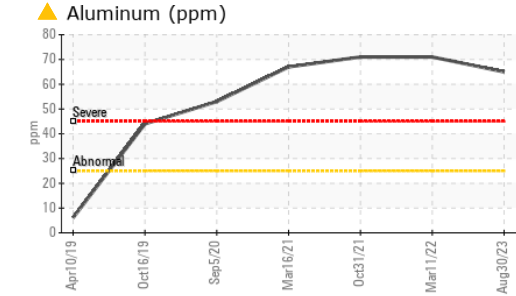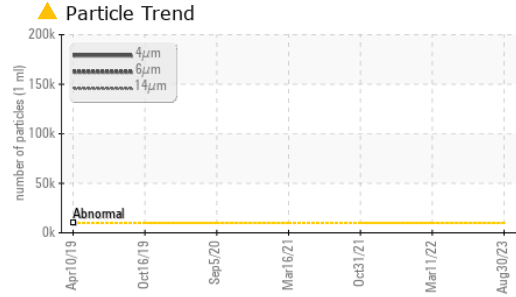





VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	LIGHT	NONE	VLITE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	109	79.5	81.4	82.0
Visc @ 100°C	cSt	ASTM D445	16.0	12.3	13.0	13.2
Viscosity Index (VI)	Scale	ASTM D2270	157	151	160	162

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

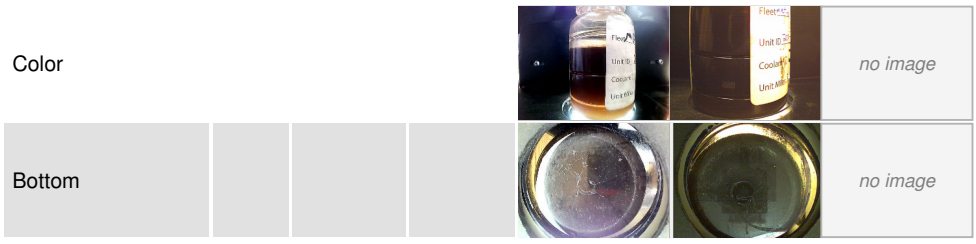

GRAPHS

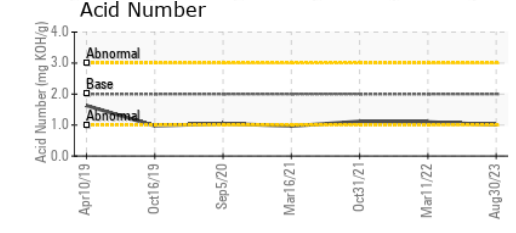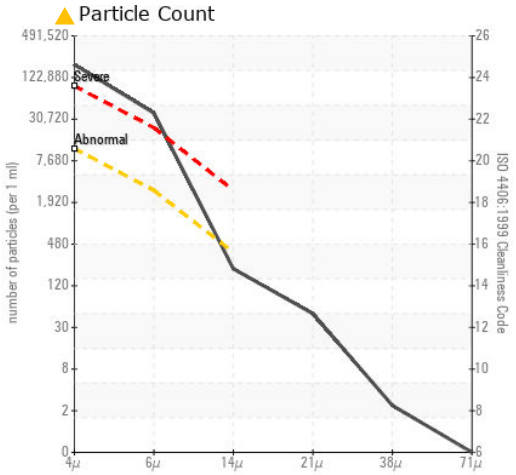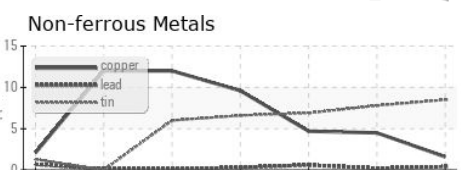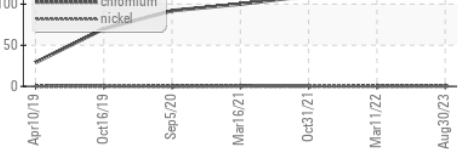

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0853874
Lab Number : 05959076
Unique Number : 10660289
Test Package : MOB 2 (Additional Tests: KF, KV100, PrtCount, VI)

BASF - GIANNA CREDAROLI
 500 WHITE PLAINS RD
 TARRYTOWN, NY
 US 10591
 Contact: GIANNA CREDAROLI
 gianna.credaroli@basf.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)