

PROBLEM SUMMARY

Sample Rating Trend


ISO

Machine Id KAESER SX 7.5 4305234 (S/N 1025)

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

COMPONENT CONDITION SUMMARY

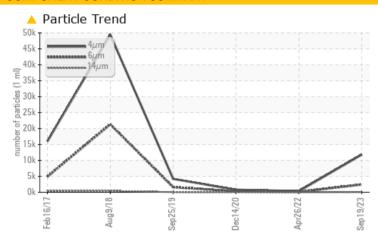

RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

| PROBLEMATIC TEST RESULTS | | | | | | | | |
|--------------------------|----------------|---------------------------|----------|--------|--|--|--|--|
| Sample Status | | ATTENTION | NORMAL | NORMAL | | | | |
| Particles >6µm | ASTM D7647 > | >1300 A 2449 | 108 | 249 | | | | |
| Oil Cleanliness | ISO 4406 (c) > | >/17/13 A 21/18/13 | 16/14/11 | 15/11 | | | | |

Customer Id: PERRAM Sample No.: KCPA006221 Lab Number: 05959085 Test Package: IND 2

To manage this report scan the QR code

To discuss the diagnosis or test data:

Don Baldridge +1 don.b505@comcast.net

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

26 Apr 2022 Diag: Don Baldridge

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



14 Dec 2020 Diag: Jonathan Hester

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



25 Sep 2019 Diag: Don Baldridge

ISO



Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a moderate amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





OIL ANALYSIS REPORT

Sample Rating Trend



KAESER SX 7.5 4305234 (S/N 1025)

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| | | Feb 2017 | Aug2018 Sep2019 | Dec2020 Apr2022 | Sep2023 | |
|------------------|----------|--------------|-----------------|-----------------|-------------|-------------|
| SAMPLE INFORM | MATION | method | limit/base | current | history1 | history2 |
| Sample Number | | Client Info | | KCPA006221 | KCP45462 | KCP29477 |
| Sample Date | | Client Info | | 19 Sep 2023 | 26 Apr 2022 | 14 Dec 2020 |
| Machine Age | hrs | Client Info | | 36947 | 33599 | 29925 |
| Oil Age | hrs | Client Info | | 0 | 3674 | 3335 |
| Oil Changed | | Client Info | | N/A | Changed | Changed |
| Sample Status | | | | ATTENTION | NORMAL | NORMAL |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| Iron | ppm | ASTM D5185m | >50 | <1 | 0 | <1 |
| Chromium | ppm | ASTM D5185m | >10 | 0 | 0 | 0 |
| Nickel | ppm | ASTM D5185m | >3 | 0 | <1 | 0 |
| Titanium | ppm | ASTM D5185m | >3 | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185m | >2 | 0 | <1 | <1 |
| Aluminum | ppm | ASTM D5185m | >10 | 0 | 0 | <1 |
| Lead | ppm | ASTM D5185m | >10 | <1 | 0 | 0 |
| Copper | ppm | ASTM D5185m | >50 | 1 | 1 | 2 |
| Tin | ppm | ASTM D5185m | >10 | <1 | <1 | 0 |
| Antimony | ppm | ASTM D5185m | | | | 0 |
| Vanadium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Cadmium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron | ppm | ASTM D5185m | 0 | 0 | <1 | 10 |
| Barium | ppm | ASTM D5185m | 90 | 2 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m | 0 | 0 | 0 | 0 |
| Manganese | ppm | ASTM D5185m | | 0 | 0 | <1 |
| Magnesium | ppm | ASTM D5185m | 100 | 51 | 55 | 54 |
| Calcium | ppm | ASTM D5185m | 0 | <1 | 0 | <1 |
| Phosphorus | ppm | ASTM D5185m | 0 | 2 | 2 | 1 |
| Zinc | ppm | ASTM D5185m | 0 | 8 | 6 | 10 |
| Sulfur | ppm | ASTM D5185m | 23500 | 19080 | 16919 | 19318 |
| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
| Silicon | ppm | ASTM D5185m | >25 | <1 | 0 | 0 |
| Sodium | ppm | ASTM D5185m | | 5 | 5 | 6 |
| Potassium | ppm | ASTM D5185m | >20 | 2 | 0 | 1 |
| Water | % | ASTM D6304 | >0.05 | 0.013 | 0.007 | 0.009 |
| ppm Water | ppm | ASTM D6304 | >500 | 133.6 | 74.8 | 99.7 |
| FLUID CLEANLIN | ESS | method | limit/base | current | history1 | history2 |
| Particles >4µm | | ASTM D7647 | | 11830 | 339 | 793 |
| Particles >6µm | | ASTM D7647 | >1300 | <u>^</u> 2449 | 108 | 249 |
| Particles >14μm | | ASTM D7647 | >80 | 64 | 14 | 13 |
| Particles >21µm | | ASTM D7647 | >20 | 13 | 2 | 4 |
| Particles >38µm | | ASTM D7647 | >4 | 0 | 0 | 0 |
| Particles >71μm | | ASTM D7647 | >3 | 0 | 0 | 0 |
| Oil Cleanliness | | ISO 4406 (c) | >/17/13 | <u> </u> | 16/14/11 | 15/11 |
| FLUID DEGRADA | TION | method | limit/base | current | history1 | history2 |
| Acid Number (AN) | ma K∩⊔/a | VSTM D804E | 4.0 | 0.33 | 0.40 | 0.330 |



OIL ANALYSIS REPORT



Diagnostician : Don Baldridge

Certificate L2367

Unique Number

: 10660298

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Test Package : IND 2 (Additional Tests: KF, PrtCount)

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

US 55303

T: F:

Contact: SERVICE MANAGER