

### **PROBLEM SUMMARY**


### GALE C Machine Id [GALE C] 001 550006-1


Port Main Engine

**CHEVRON DELO 710 LE (250 GAL)** 

# Sample Rating Trend DIRT DIRT DIRT

### **COMPONENT CONDITION SUMMARY**

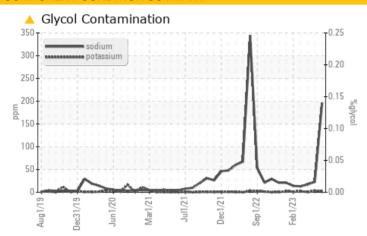

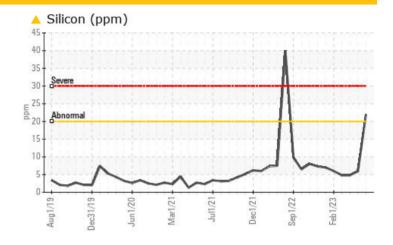

### RECOMMENDATION

We advise that you check for possible coolant leak. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS							
Sample Status				ABNORMAL	NORMAL	NORMAL	
Silicon	ppm	ASTM D5185m	>20	<u>^</u> 22	6	5	
Sodium	ppm	ASTM D5185m	>75	<b>196</b>	23	17	

Customer Id: INGPAD Sample No.: MW0038475 Lab Number: 05959186 Test Package: MAR 2

To manage this report scan the QR code

To discuss the diagnosis or test data: Jonathan Hester +1 919-379-4092 x4092 jhester@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

### **RECOMMENDED ACTIONS**

Action	Status	Date	Done By	Description
Resample			?	We recommend an early resample to monitor this condition.
Check Glycol Access			?	We advise that you check for the source of the coolant leak.

### HISTORICAL DIAGNOSIS

### 01 Jun 2023 Diag: Wes Davis

### NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.



### 01 Apr 2023 Diag: Wes Davis

### NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## view report

### 28 Feb 2023 Diag: Doug Bogart

### NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.






### **OIL ANALYSIS REPORT**

### GALE C [GALE C] 001 550006-1

**Port Main Engine** 

**CHEVRON DELO 710 LE (250 GAL)** 



Sample Rating Trend



### **DIAGNOSIS**

### Recommendation

We advise that you check for possible coolant leak. We recommend an early resample to monitor this condition.

### Wear

All component wear rates are normal.

### Contamination

Sodium and/or potassium levels are high. Elemental level of sodium (Na) and/or boron (B) indicates a possible cooling water leak. Elemental level of silicon (Si) above normal indicating ingress of seal material.


### Fluid Condition


The BN result indicates that there is suitable alkalinity remaining in the oil.


g2019 Dec2013 Jun2020 Mar2021 Ju2021 Dec2021 Sep2022 Feb2023							
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2	
Sample Number		Client Info		MW0038475	MW0038760	MW0043176	
Sample Date		Client Info		01 Sep 2023	01 Jun 2023	01 Apr 2023	
Machine Age	hrs	Client Info		8204	6290	4819	
Oil Age	hrs	Client Info		8204	0	4819	
Oil Changed		Client Info		Not Changd	N/A	Not Changd	
Sample Status				ABNORMAL	NORMAL	NORMAL	
CONTAMINATION	V	method	limit/base	current	history1	history2	
Fuel		WC Method	>4.0	<1.0	<1.0	<1.0	
WEAR METALS		method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>75	17	14	19	
Chromium	ppm	ASTM D5185m	>8	<1	1	<1	
Nickel	ppm	ASTM D5185m	>2	<1	1	<1	
Titanium	ppm	ASTM D5185m	>3	<1	0	0	
Silver	ppm	ASTM D5185m	>2	0	0	0	
Aluminum	ppm	ASTM D5185m	>15	2	1	2	
Lead	ppm	ASTM D5185m	>18	6	9	9	
Copper	ppm	ASTM D5185m	>80	11	12	16	
Tin	ppm	ASTM D5185m	>14	5	6	7	
Vanadium	ppm	ASTM D5185m		<1	0	0	
Cadmium	ppm	ASTM D5185m		0	0	0	
ADDITIVES		method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		60	46	44	
Barium	ppm	ASTM D5185m		<1	0	0	
Molybdenum	ppm	ASTM D5185m		45	46	46	
Manganese	ppm	ASTM D5185m		<1	<1	<1	
Magnesium	ppm	ASTM D5185m		12	16	16	
Calcium	ppm	ASTM D5185m		3327	3703	3632	
Phosphorus	ppm	ASTM D5185m		8	14	8	
Zinc	ppm	ASTM D5185m	10	7	0	5	
Sulfur	ppm	ASTM D5185m		2484	2919	2698	
CONTAMINANTS	5	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>20	<u>^</u> 22	6	5	
Sodium	ppm	ASTM D5185m	>75	<u> </u>	23	17	
Potassium	ppm	ASTM D5185m	>20	3	3	<1	
Glycol	%	*ASTM D2982		NEG	NEG	NEG	
INFRA-RED		method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	>3	0.2	0.2	0.2	
Nitration	Abs/cm	*ASTM D7624	>20	8.7	9.0	8.4	
Sulfation	Abs/.1mm	*ASTM D7415	>30	16.6	17.0	15.4	
FLUID DEGRADA	NOITA	method	limit/base	current	history1	history2	
FLUID DEGRADA  Oxidation	ATION Abs/.1mm	method *ASTM D7414	limit/base >25	current 8.6	history1 11.1	history2 9.5	
		*ASTM D7414					





### **OIL ANALYSIS REPORT**

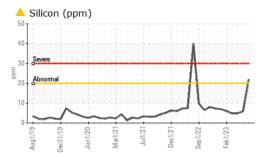

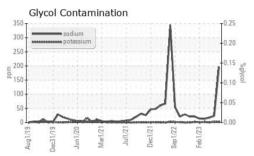







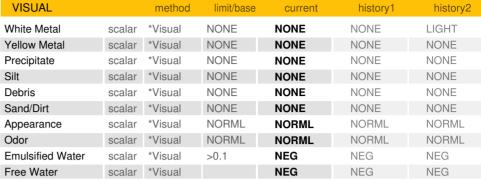



FLUID PHOPENTIES		method	iiiiii/base	current	riistory i	HIStory	
Visc @ 100°C	cSt	ASTM D445	15.5	15.0	15.1	15.1	

### **GRAPHS**







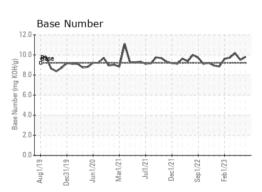





Laboratory Sample No. Lab Number **Unique Number** 

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : 05959186

: MW0038475 : 10660399

Received Diagnosed

Diagnostician

: 22 Sep 2023 : 26 Sep 2023

: Jonathan Hester

US 42003 Contact: ALLEN WILLHELM allen.willhelm@ingrambarge.com

T: (270)415-4467 F: (615)695-3697

Test Package : MAR 2 ( Additional Tests: Glycol ) Certificate L2367 To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) **INGRAM BARGE** 

900 S 3RD ST

PADUCAH, KY