




# OIL ANALYSIS REPORT

Sample Rating Trend

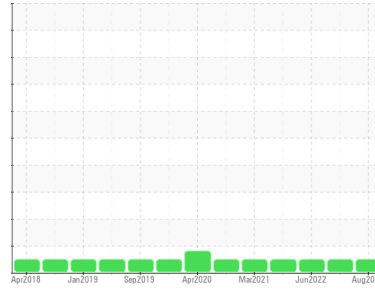

**NORMAL**



Machine Id  
**CATEPILLAR 139**

Component  
**Diesel Engine**

Fluid  
**DIESEL ENGINE OIL SAE 15W40 (5 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>RW0004517</b>	RW0004444	RW0003694
Sample Date	Client Info			<b>26 Aug 2023</b>	22 Feb 2023	03 Jun 2022
Machine Age	hrs	Client Info		<b>5776</b>	5400	4998
Oil Age	hrs	Client Info		<b>376</b>	103	277
Oil Changed	Client Info			<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>22</b>	17	26
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	1	2
Nickel	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>2	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m	>25	<b>21</b>	20	22
Lead	ppm	ASTM D5185m	>40	<b>0</b>	0	<1
Copper	ppm	ASTM D5185m	>330	<b>6</b>	8	3
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	0	<1
Antimony	ppm	ASTM D5185m		<b>---</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	250	<b>5</b>	8	14
Barium	ppm	ASTM D5185m	10	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	100	<b>65</b>	65	63
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	1	<1
Magnesium	ppm	ASTM D5185m	450	<b>939</b>	1047	866
Calcium	ppm	ASTM D5185m	3000	<b>1154</b>	1202	1200
Phosphorus	ppm	ASTM D5185m	1150	<b>1090</b>	1106	1040
Zinc	ppm	ASTM D5185m	1350	<b>1306</b>	1415	1246
Sulfur	ppm	ASTM D5185m	4250	<b>3545</b>	3947	3525



CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>4</b>	5	4
Sodium	ppm	ASTM D5185m	>158	<b>2</b>	<1	<1
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	<1	2

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.3</b>	0.4	0.9
Nitration	Abs/cm	*ASTM D7624	>20	<b>7.4</b>	5.7	7.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>18.2</b>	17.6	19.0

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>14.0</b>	12.7	14.2
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>10.56</b>	9.49	8.87











# OIL ANALYSIS REPORT

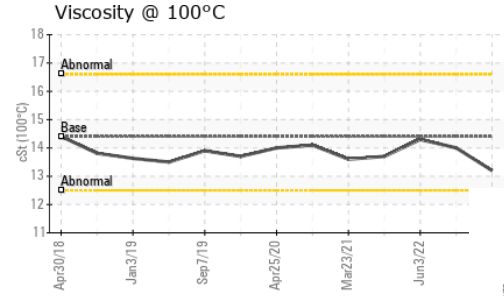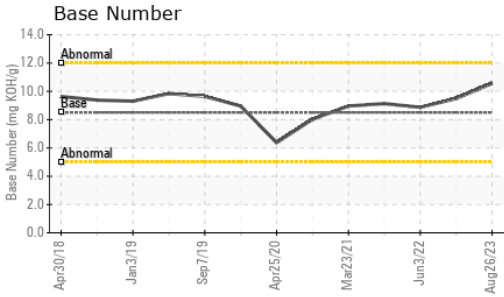

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	<b>13.2</b>	14.0	14.3

### GRAPHS

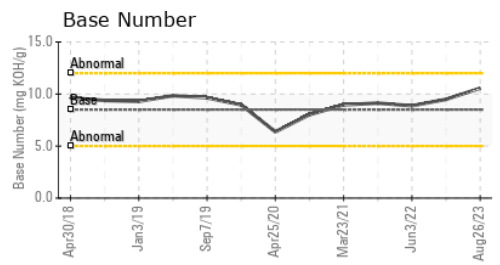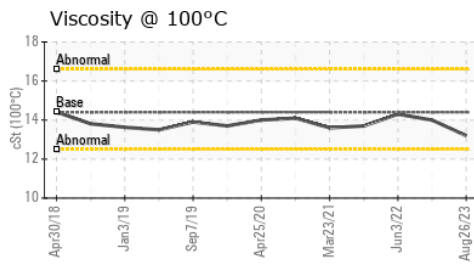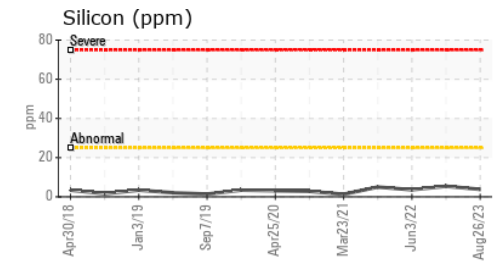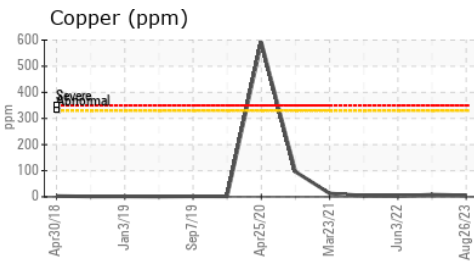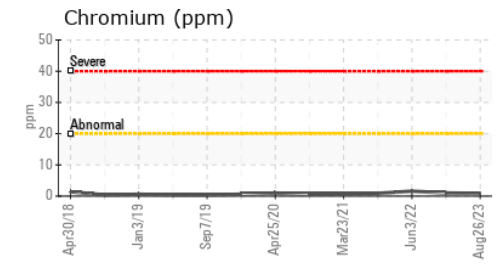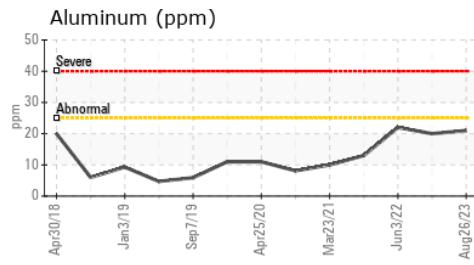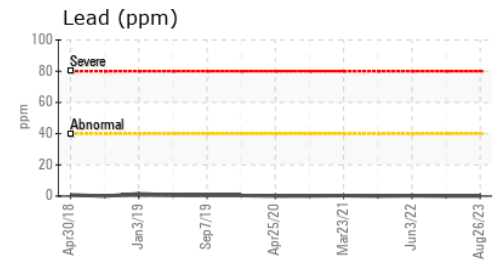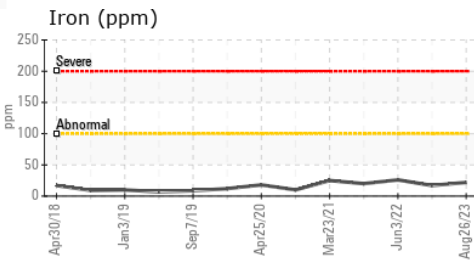

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : RW0004517 **Received** : 22 Sep 2023  
**Lab Number** : 05959218 **Diagnosed** : 25 Sep 2023  
**Unique Number** : 10660431 **Diagnostician** : Wes Davis  
**Test Package** : MOB 2

**HALLACK CONTRACTING, INC.**  
 4223 W POLK  
 HART, MI  
 US 49420  
 Contact: DAN HALLACK KARL BUTCHER  
 shop@hallackcontracting.com  
 T: (231)873-5081  
 F: (231)873-2889

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)