




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Area  
**OKLAHOMA/102/EG - OTHER SERVICE**  
 Machine Id  
**54.16L [OKLAHOMA^102^EG - OTHER SERVICE]**  
 Component  
**Diesel Engine**  
 Fluid  
**MOBIL DELVAC 1300 SUPER15W40 (--- GAL)**

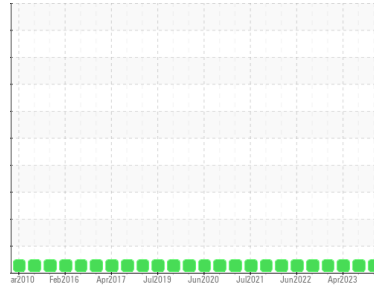

## DIAGNOSIS

**Recommendation**  
 Resample at the next service interval to monitor. ( Customer Sample Comment: 8474 hrs )

**Wear**  
 All component wear rates are normal.

**Contamination**  
 There is no indication of any contamination in the oil.

**Fluid Condition**  
 The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>WC0819993</b>	WC0819937	WC0746786
Sample Date	Client Info	<b>18 Sep 2023</b>	29 Jul 2023	03 Apr 2023
Machine Age	hrs Client Info	<b>8474</b>	8469	8279
Oil Age	hrs Client Info	<b>8243</b>	8243	8243
Oil Changed	Client Info	<b>N/A</b>	N/A	N/A
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >150	<b>4</b>	4	3
Chromium	ppm ASTM D5185m >20	<b>0</b>	<1	<1
Nickel	ppm ASTM D5185m >2	<b>0</b>	0	<1
Titanium	ppm ASTM D5185m >2	<b>0</b>	0	0
Silver	ppm ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >20	<b>1</b>	2	<1
Lead	ppm ASTM D5185m >40	<b>0</b>	0	0
Copper	ppm ASTM D5185m >30	<b>1</b>	0	0
Tin	ppm ASTM D5185m >15	<b>0</b>	0	0
Vanadium	ppm ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>79</b>	57	70
Barium	ppm ASTM D5185m 0	<b>12</b>	0	2
Molybdenum	ppm ASTM D5185m 0	<b>41</b>	33	40
Manganese	ppm ASTM D5185m	<b>0</b>	<1	<1
Magnesium	ppm ASTM D5185m 0	<b>543</b>	477	466
Calcium	ppm ASTM D5185m	<b>1683</b>	1481	1665
Phosphorus	ppm ASTM D5185m	<b>764</b>	676	741
Zinc	ppm ASTM D5185m	<b>923</b>	848	901
Sulfur	ppm ASTM D5185m	<b>2852</b>	2750	2698

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>15</b>	6	9
Sodium	ppm ASTM D5185m	<b>5</b>	<1	2
Potassium	ppm ASTM D5185m >20	<b>11</b>	2	<1

## INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0</b>	0.1	0.1
Nitration	Abs/cm *ASTM D7624 >20	<b>5.0</b>	5.5	5.2
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>21.2</b>	20.9	21.5

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>19.0</b>	18.5	18.7
Base Number (BN)	mg KOH/g ASTM D2896 9.4	<b>10.5</b>	10.0	10.4







# OIL ANALYSIS REPORT

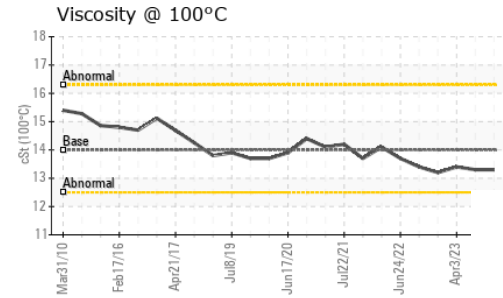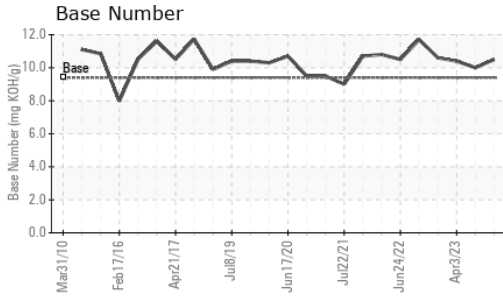

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445 14	<b>13.3</b>	13.3	13.4

## GRAPHS

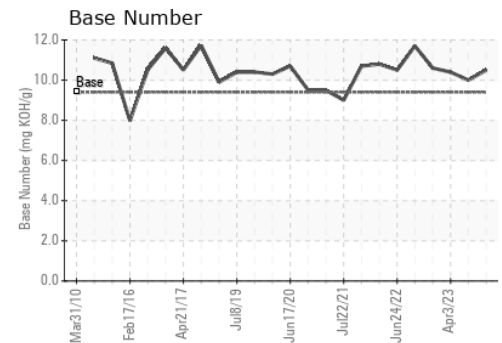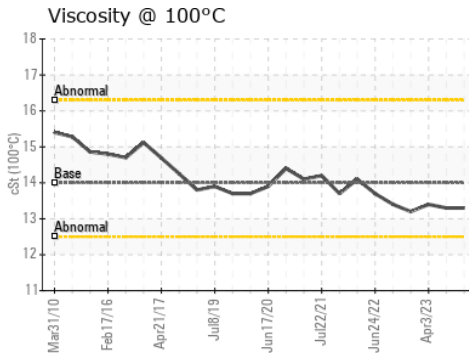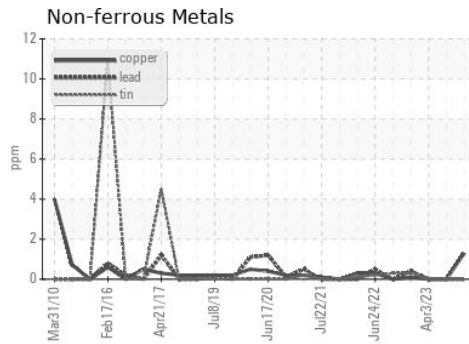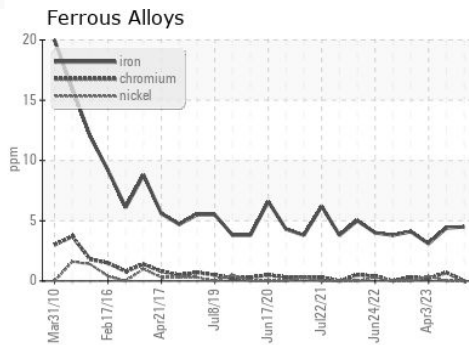

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0819993 **Received** : 25 Sep 2023  
**Lab Number** : **05959401** **Diagnosed** : 25 Sep 2023  
**Unique Number** : 10660614 **Diagnostician** : Don Baldrige  
**Test Package** : CONST ( Additional Tests: TBN )

**SHERWOOD CONSTRUCTION CO INC**  
 3219 WEST MAY ST  
 WICHITA, KS  
 US 67213  
 Contact: DOUG KING  
 doug.king@sherwood.net  
 T: (316)617-3161  
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)