




# OIL ANALYSIS REPORT

Sample Rating Trend

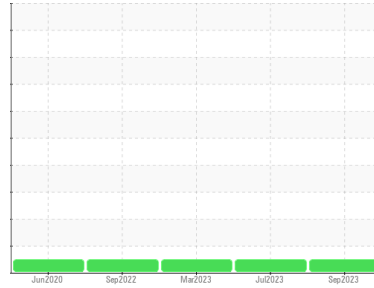

**NORMAL**



Machine Id

## BALER 71

Component

### Hydraulic System

Fluid

### AW HYDRAULIC OIL ISO 46 (--- GAL)

#### DIAGNOSIS

##### Recommendation

Resample at the next service interval to monitor.

##### Wear

All component wear rates are normal.

##### Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

##### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| SAMPLE INFORMATION |             | method      | limit/base | current            | history1    | history2    |
|--------------------|-------------|-------------|------------|--------------------|-------------|-------------|
| Sample Number      | Client Info |             |            | <b>PTK0004859</b>  | PTK0004451  | PTK0003875  |
| Sample Date        | Client Info |             |            | <b>14 Sep 2023</b> | 17 Jul 2023 | 02 Mar 2023 |
| Machine Age        | mths        | Client Info |            | <b>0</b>           | 0           | 0           |
| Oil Age            | mths        | Client Info |            | <b>0</b>           | 0           | 0           |
| Oil Changed        | Client Info |             |            | <b>Not Changed</b> | Not Changed | Not Changed |
| Sample Status      |             |             |            | <b>NORMAL</b>      | NORMAL      | NORMAL      |

| WEAR METALS |     | method      | limit/base | current      | history1 | history2 |
|-------------|-----|-------------|------------|--------------|----------|----------|
| Iron        | ppm | ASTM D5185m | >20        | <b>&lt;1</b> | <1       | 0        |
| Chromium    | ppm | ASTM D5185m | >10        | <b>0</b>     | <1       | <1       |
| Nickel      | ppm | ASTM D5185m | >10        | <b>&lt;1</b> | 0        | 0        |
| Titanium    | ppm | ASTM D5185m |            | <b>0</b>     | 0        | 0        |
| Silver      | ppm | ASTM D5185m |            | <b>0</b>     | 0        | 0        |
| Aluminum    | ppm | ASTM D5185m | >10        | <b>0</b>     | 0        | 0        |
| Lead        | ppm | ASTM D5185m | >10        | <b>0</b>     | 0        | <1       |
| Copper      | ppm | ASTM D5185m | >75        | <b>28</b>    | 31       | 32       |
| Tin         | ppm | ASTM D5185m | >10        | <b>&lt;1</b> | <1       | <1       |
| Vanadium    | ppm | ASTM D5185m |            | <b>0</b>     | 0        | 0        |
| Cadmium     | ppm | ASTM D5185m |            | <b>0</b>     | 0        | 0        |





| ADDITIVES  |     | method      | limit/base | current     | history1 | history2 |
|------------|-----|-------------|------------|-------------|----------|----------|
| Boron      | ppm | ASTM D5185m | 5          | <b>0</b>    | 0        | 0        |
| Barium     | ppm | ASTM D5185m | 5          | <b>0</b>    | 2        | 2        |
| Molybdenum | ppm | ASTM D5185m | 5          | <b>0</b>    | 0        | 0        |
| Manganese  | ppm | ASTM D5185m |            | <b>0</b>    | 0        | 0        |
| Magnesium  | ppm | ASTM D5185m | 25         | <b>0</b>    | <1       | 0        |
| Calcium    | ppm | ASTM D5185m | 200        | <b>44</b>   | 48       | 45       |
| Phosphorus | ppm | ASTM D5185m | 300        | <b>348</b>  | 325      | 315      |
| Zinc       | ppm | ASTM D5185m | 370        | <b>444</b>  | 404      | 396      |
| Sulfur     | ppm | ASTM D5185m | 2500       | <b>1006</b> | 899      | 679      |

| CONTAMINANTS |     | method      | limit/base | current      | history1 | history2 |
|--------------|-----|-------------|------------|--------------|----------|----------|
| Silicon      | ppm | ASTM D5185m | >20        | <b>&lt;1</b> | <1       | <1       |
| Sodium       | ppm | ASTM D5185m |            | <b>0</b>     | 0        | 0        |
| Potassium    | ppm | ASTM D5185m | >20        | <b>1</b>     | 0        | <1       |

| FLUID CLEANLINESS |  | method       | limit/base | current      | history1 | history2 |
|-------------------|--|--------------|------------|--------------|----------|----------|
| Particles >4µm    |  | ASTM D7647   |            | <b>3148</b>  | 2892     | 1087     |
| Particles >6µm    |  | ASTM D7647   | >2500      | <b>1088</b>  | 844      | 274      |
| Particles >14µm   |  | ASTM D7647   | >320       | <b>121</b>   | 62       | 8        |
| Particles >21µm   |  | ASTM D7647   | >80        | <b>30</b>    | 18       | 2        |
| Particles >38µm   |  | ASTM D7647   | >20        | <b>1</b>     | 1        | 0        |
| Particles >71µm   |  | ASTM D7647   | >4         | <b>0</b>     | 0        | 0        |
| Oil Cleanliness   |  | ISO 4406 (c) | >18/15     | <b>17/14</b> | 17/13    | 15/10    |

| FLUID DEGRADATION |          | method     | limit/base | current     | history1 | history2 |
|-------------------|----------|------------|------------|-------------|----------|----------|
| Acid Number (AN)  | mg KOH/g | ASTM D8045 | 0.57       | <b>0.30</b> | 0.34     | 0.28     |


# OIL ANALYSIS REPORT

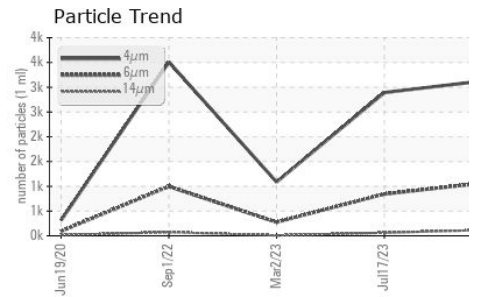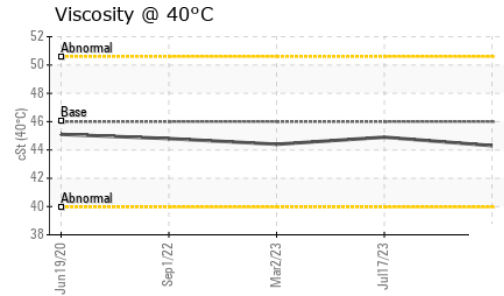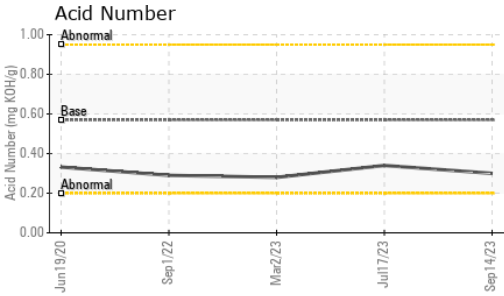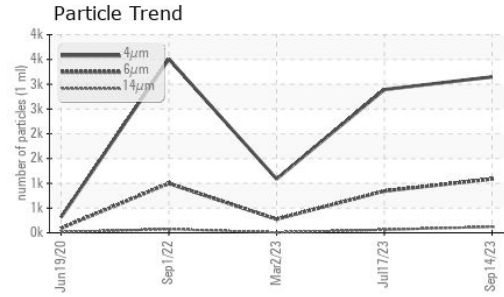






| VISUAL           | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | NONE     |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Silt             | scalar | *Visual    | NONE    | NONE     | NONE     |
| Debris           | scalar | *Visual    | NONE    | NONE     | NONE     |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | NONE     |
| Appearance       | scalar | *Visual    | NORML   | NORML    | NORML    |
| Odor             | scalar | *Visual    | NORML   | NORML    | NORML    |
| Emulsified Water | scalar | *Visual    | >0.1    | NEG      | NEG      |
| Free Water       | scalar | *Visual    |         | NEG      | NEG      |

| FLUID PROPERTIES | method | limit/base   | current     | history1 | history2 |
|------------------|--------|--------------|-------------|----------|----------|
| Visc @ 40°C      | cSt    | ASTM D445 46 | <b>44.3</b> | 44.9     | 44.4     |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
|---------------|--------|------------|---------|----------|----------|

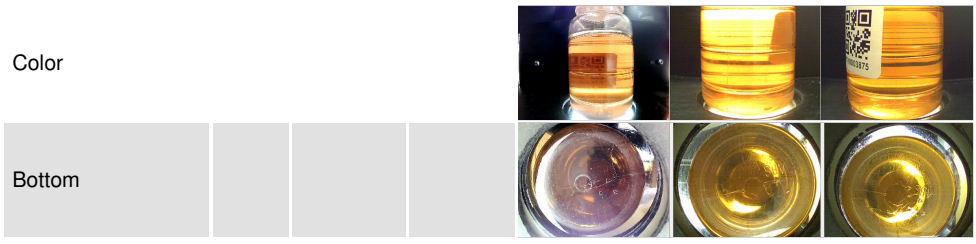

## GRAPHS

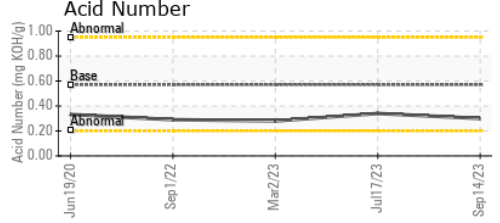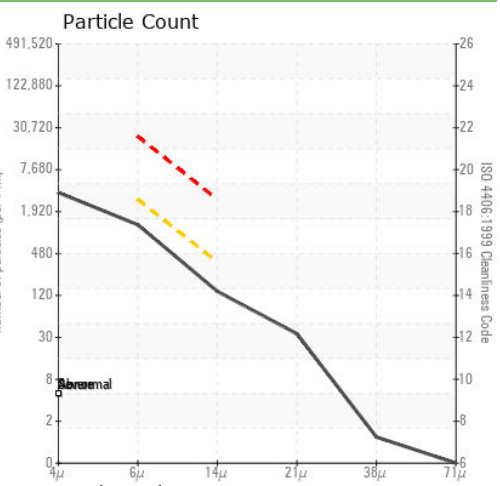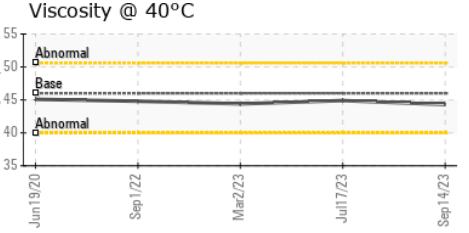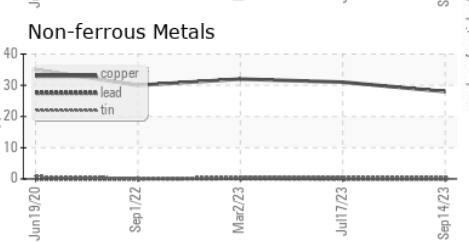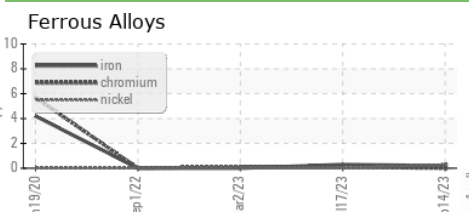

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PTK0004859 **Received** : 25 Sep 2023  
**Lab Number** : 05959756 **Diagnosed** : 26 Sep 2023  
**Unique Number** : 10660969 **Diagnostician** : Wes Davis  
**Test Package** : MOB 2

**JMK FIBERS**  
 1440 PORT OF TACOMA RD  
 TACOMA, WA  
 US 98421  
 Contact: DAVID GRAY  
 dgray5@wm.com  
 T:  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)