


PROBLEM SUMMARY

Area DIAMOND BLUE 8K Machine Id SULLAIR 003-137188 - SPARTAN LIGHT MEXICO Component

Compressor

COMPONENT CONDITION SUMMARY

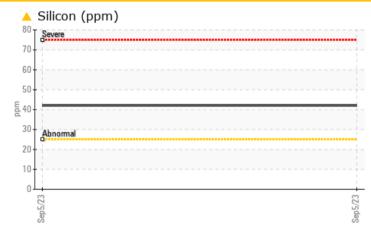

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS									
Sample Status			ABNORMAL						
Silicon	ppm	ASTM D5185m	>25	<u> </u>					


Customer Id: UCJOHSAI Sample No.: UCH05959883 Lab Number: 05959883 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Doug Bogart +1 (800)237-1369 x4016 <u>dougb@wearcheckusa.com</u>

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

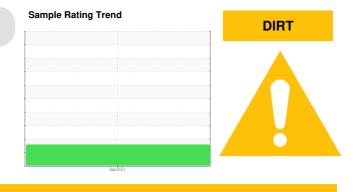

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT

Area DIAMOND BLUE 8K Machine Id SULLAIR 003-137188 - SPARTAN LIGHT MEXICO Component

Compressor

DIAGNOSIS

A Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Elemental level of silicon (Si) above normal.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		-				
				Sep2023		
SAMPLE INFORI	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		UCH05959883		
Sample Date		Client Info		05 Sep 2023		
Machine Age	hrs	Client Info		89138		
Oil Age	hrs	Client Info		3096		
Oil Changed		Client Info		Not Changd		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	2		
Chromium	ppm	ASTM D5185m	>10	0		
Nickel	ppm	ASTM D5185m		<1		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>25	0		
Lead	ppm	ASTM D5185m	>25	<1		
Copper	ppm	ASTM D5185m	>50	5		
Tin	ppm	ASTM D5185m	>15	ء <1		
Vanadium	ppm	ASTM D5185m	210	0		
Cadmium		ASTM D5185m		0		
	ppm			-		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		566		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m		0		
Calcium	ppm	ASTM D5185m		4		
Phosphorus	ppm	ASTM D5185m		13		
Zinc	ppm	ASTM D5185m		35		
Sulfur	ppm	ASTM D5185m		483		
CONTAMINANTS	S	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	4 2		
Sodium	ppm	ASTM D5185m		103		
Potassium	ppm	ASTM D5185m	>20	7		
FLUID DEGRAD	ATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.269		
VISUAL	ing Koning	method	limit/base		biotonut	history2
			limit/base		history1	
White Metal	scalar	*Visual	NONE	NONE		
Yellow Metal	scalar	*Visual	NONE	NONE		
Precipitate	scalar	*Visual	NONE	NONE		
Silt	scalar	*Visual	NONE	NONE		
Debris	scalar	*Visual	NONE	NONE		
Sand/Dirt	scalar	*Visual	NONE	NONE		
Appearance	scalar	*Visual	NORML	NORML		
Odor	scalar	*Visual	NORML	NORML		
Emulsified Water	scalar	*Visual	>0.1	NEG		
Free Water	scalar	*Visual		NEG		
16:27) Pov: 1			Contact/	Location: DACU		

Sample Rating Trend

DIRT



OIL ANALYSIS REPORT



Contact/Location: RACHEL VON HATTEN - UCJOHSAI