




COOLANT REPORT

Sample Rating Trend

NORMAL



Area
OKLAHOMA/102
 Machine Id
20.526L [OKLAHOMA^102]
 Component
Coolant
 Fluid
CATERPILLAR ELC (--- GAL)

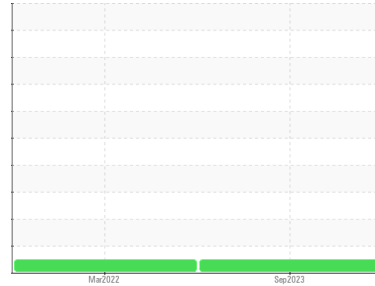

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The fluid is suitable for further service.

Corrosion

All metal levels are normal indicating no corrosion in the cooling system.

Contaminants

There is no indication of any contamination in the coolant.

Coolant Condition

Carboxylate test failed. Glycol and nitrite levels are acceptable. The pH level of this fluid is within the acceptable limits.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0834137	WC0584723	---
Sample Date	Client Info		18 Sep 2023	03 Mar 2022	---
Machine Age	hrs	Client Info	1737	13	---
Oil Age	hrs	Client Info	1737	13	---
Oil Changed	Client Info		Not Chngd	Not Chngd	---
Sample Status			NORMAL	NORMAL	---

PHYSICAL TEST RESULTS

	method	limit/base	current	history1	history2
Specific Gravity	*ASTM D1298		1.068	1.068	---
pH	Scale 0-14	ASTM D1287	7.56	8.45	---
Nitrites	ppm	AP-053:2009	372	636	---
Reserve Alkalinity	Scale 0-20	*ASTM D1121	---	---	---
Percentage Glycol	%	ASTM D3321	50.8	50.4	---
Freezing Point	°F	ASTM D3321	-35	-35	---
Total Dissolved Solids			370.5	337.5	---
Carboxylate			fail	pass	---

CORROSION INHIBITORS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D6130	0	37	36
Phosphorus	ppm	ASTM D6130	0	14	141
Boron	ppm	ASTM D6130	0	<1	0
Molybdenum	ppm	ASTM D6130	950	1005	1091

CORROSION

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D6130	>15	<1	4
Aluminum	ppm	ASTM D6130	>10	<1	<1
Copper	ppm	ASTM D6130	>10	2	<1
Lead	ppm	ASTM D6130	>10	0	<1
Tin	ppm	ASTM D6130	>10	0	0
Zinc	ppm	ASTM D6130		<1	1

CONTAMINANTS

	method	limit/base	current	history1	history2
Chlorine	ppm	ASTM D6130		13	29

CARRIER SALTS


	method	limit/base	current	history1	history2
Sodium	ppm	ASTM D6130		5606	3420
Potassium	ppm	ASTM D6130		622	258





SCALE POTENTIAL

	method	limit/base	current	history1	history2
Calcium	ppm	ASTM D6130		2	2
Magnesium	ppm	ASTM D6130		3	2






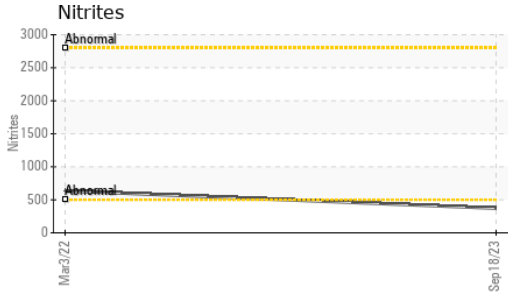


COOLANT REPORT



VISUAL	method	limit/base	current	history1	history2
Coolant Color	*Visual		Red	Red	---
Coolant Appearance	*Visual	Clear	normal	normal	---
Color					no image
Bottom					no image

GRAPHS

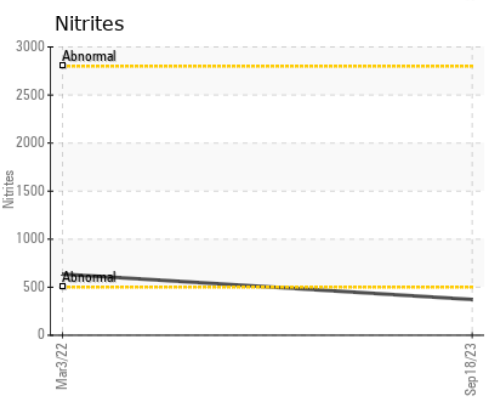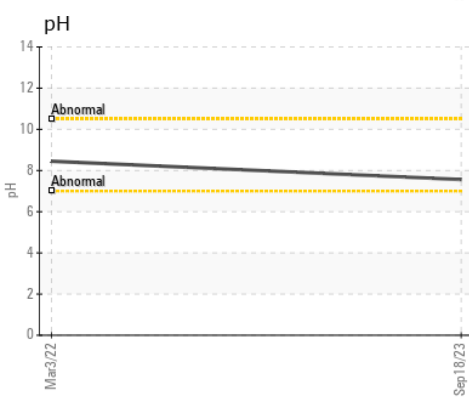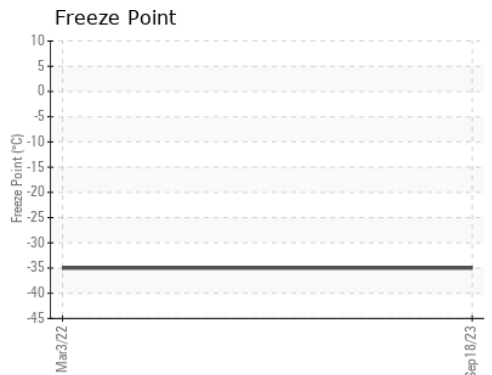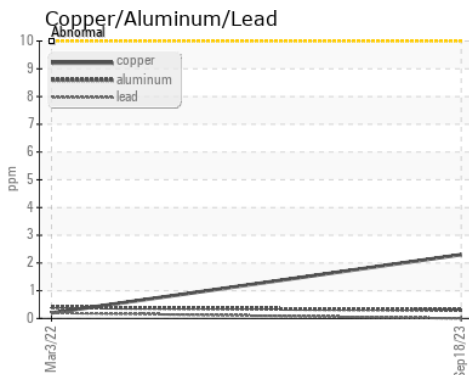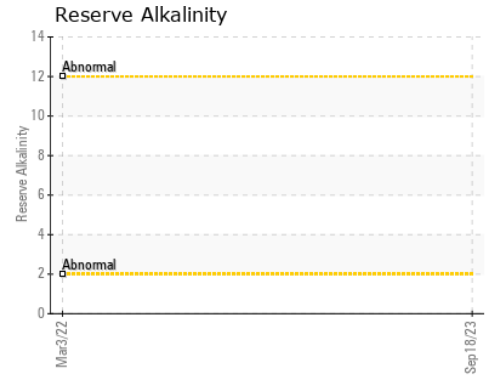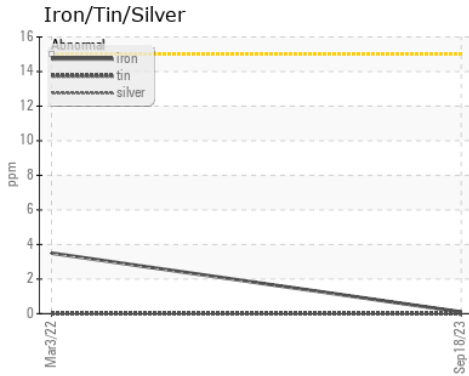

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0834137 **Received** : 25 Sep 2023
Lab Number : 05960290 **Diagnosed** : 28 Sep 2023
Unique Number : 10661503 **Diagnostician** : Doug Bogart
Test Package : COOL- (Additional Tests: COOL, ICP)

SHERWOOD CONSTRUCTION CO INC
 3219 WEST MAY ST
 WICHITA, KS
 US 67213
 Contact: DOUG KING
 doug.king@sherwood.net
 T: (316)617-3161
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)