



PROBLEM SUMMARY



Area
GM SEATTLE OFF ROAD SHOP
 Machine Id
[GM SEATTLE OFF ROAD SHOP] 28-237
 Component
Diesel Engine
 Fluid
SHELL 15W40 (--- GAL)

Sample Rating Trend



FUEL




COMPONENT CONDITION SUMMARY

▲ Viscosity @ 100°C



▲ Fuel Dilution

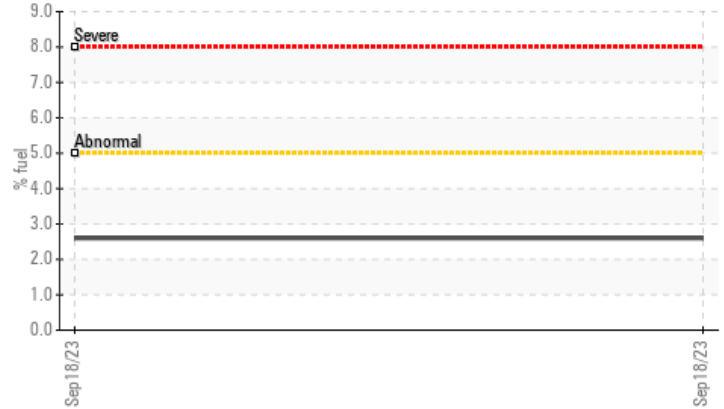

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status				ATTENTION	---	---
Fuel	%	ASTM D3524	>5	▲ 2.6	---	---
Visc @ 100°C	cSt	ASTM D445		▲ 10.3	---	---

Customer Id: GARSEA
 Sample No.: PE0000536
 Lab Number: 05960477
 Test Package: CONST



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Jonathan Hester +1 919-379-4092 x4092
jhester@wearcheckusa.com

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	Oil and filter change at the time of sampling has been noted.
Change Filter	---	---	?	Oil and filter change at the time of sampling has been noted.

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT

Sample Rating Trend

FUEL



Area
GM SEATTLE OFF ROAD SHOP
 Machine Id
[GM SEATTLE OFF ROAD SHOP] 28-237
 Component
Diesel Engine
 Fluid
SHELL 15W40 (--- GAL)



DIAGNOSIS

▲ Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

Metal levels are typical for a new component breaking in.

▲ Contamination

Light fuel dilution occurring.

▲ Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	PE0000536	---	---
Sample Date	Client Info	18 Sep 2023	---	---
Machine Age	hrs Client Info	560	---	---
Oil Age	hrs Client Info	560	---	---
Oil Changed	Client Info	Changed	---	---
Sample Status		ATTENTION	---	---

CONTAMINATION

method	limit/base	current	history1	history2
Glycol	WC Method	NEG	---	---

WEAR METALS

method	limit/base	current	history1	history2
Iron ppm	ASTM D5185m >100	22	---	---
Chromium ppm	ASTM D5185m >20	<1	---	---
Nickel ppm	ASTM D5185m >2	0	---	---
Titanium ppm	ASTM D5185m >2	0	---	---
Silver ppm	ASTM D5185m >2	0	---	---
Aluminum ppm	ASTM D5185m >25	1	---	---
Lead ppm	ASTM D5185m >40	<1	---	---
Copper ppm	ASTM D5185m >330	7	---	---
Tin ppm	ASTM D5185m >15	0	---	---
Vanadium ppm	ASTM D5185m	0	---	---
Cadmium ppm	ASTM D5185m	0	---	---

ADDITIVES

method	limit/base	current	history1	history2
Boron ppm	ASTM D5185m	35	---	---
Barium ppm	ASTM D5185m	0	---	---
Molybdenum ppm	ASTM D5185m	37	---	---
Manganese ppm	ASTM D5185m	2	---	---
Magnesium ppm	ASTM D5185m	478	---	---
Calcium ppm	ASTM D5185m	1771	---	---
Phosphorus ppm	ASTM D5185m	954	---	---
Zinc ppm	ASTM D5185m	1159	---	---
Sulfur ppm	ASTM D5185m	3793	---	---

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon ppm	ASTM D5185m >25	5	---	---
Sodium ppm	ASTM D5185m >150	2	---	---
Potassium ppm	ASTM D5185m >20	2	---	---
Fuel %	ASTM D3524 >5	▲ 2.6	---	---




INFRA-RED

method	limit/base	current	history1	history2
Soot %	*ASTM D7844 >3	0.1	---	---
Nitration	Abs/cm *ASTM D7624 >20	7.4	---	---
Sulfation	Abs/.1mm *ASTM D7415 >30	21.4	---	---

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	19.8	---	---
Base Number (BN)	mg KOH/g ASTM D2896	9.0	---	---





OIL ANALYSIS REPORT

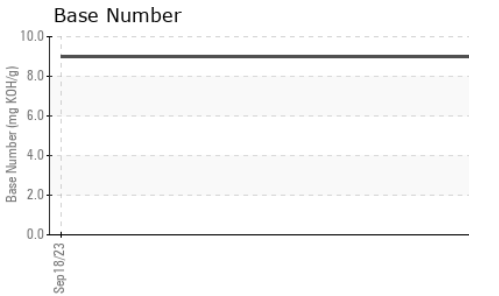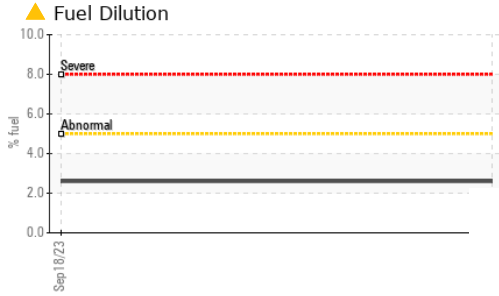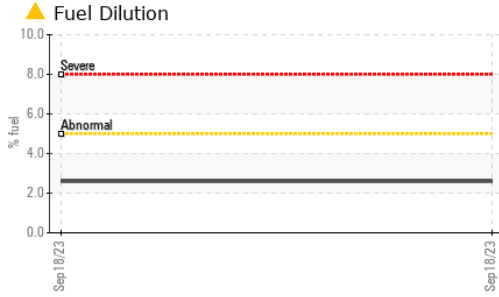

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	▲ 10.3	---	---

GRAPHS

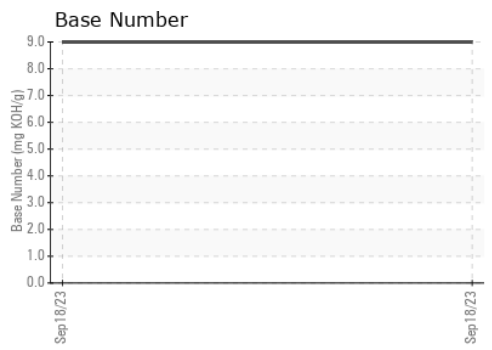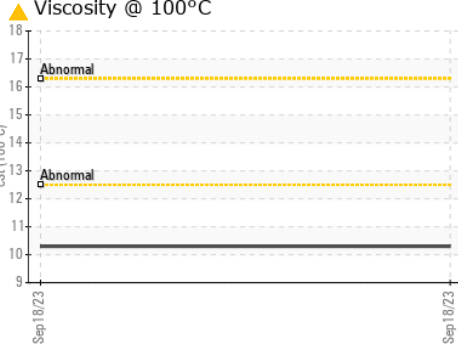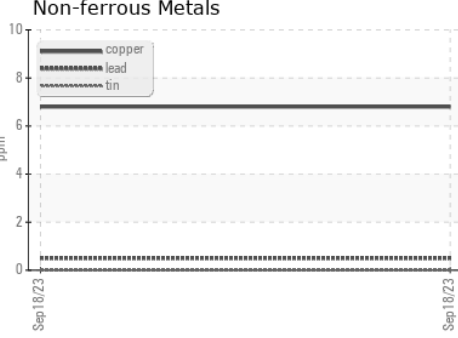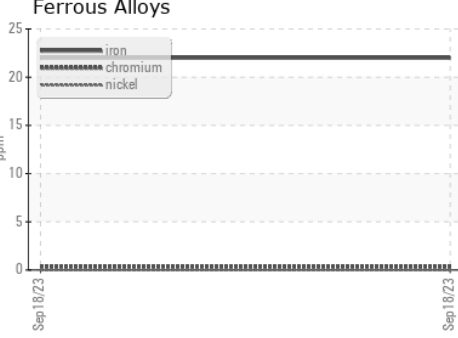

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PE0000536 **Received** : 25 Sep 2023
Lab Number : 05960477 **Diagnosed** : 27 Sep 2023
Unique Number : 10661690 **Diagnostician** : Jonathan Hester
Test Package : CONST (Additional Tests: FT-IR, FuelDilution, ICP, KV100, PercentFuel, SCREEN, TBN)

Gary Merlino Construction - Off Road Shop
 9125 10TH AVE SOUTH
 SEATTLE, WA
 US 98108
 Contact: Jesse Patterson
 oilsamples@gmccinc.com
 T: 1(866)292-1303
 F:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)