


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL



BALDWIN U-22 GENERATOR

Component **Thrust Bearing**

NOT GIVEN (2000 GAL)

Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

There is no indication of any contamination in the component. The amount and size of particulates present in the system is acceptable.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

5c2005 Dec2009 Dec2013 Aug2015 Mar2017 Aug2018 Mar2020 Sep2022						
SAMPLE INFORM	//ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0845045	WC0786731	WC0731010
Sample Date		Client Info		12 Sep 2023	02 Mar 2023	16 Sep 2022
Machine Age	yrs	Client Info		0	0	0
Oil Age	yrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>85	0	0	0
Chromium	ppm	ASTM D5185m	>20	0	0	0
Nickel	ppm	ASTM D5185m	>20	0	0	0
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m		0	0	<1
Aluminum	ppm	ASTM D5185m	>40	0	<1	0
Lead	ppm	ASTM D5185m	>60	0	<1	0
Copper	ppm	ASTM D5185m	>7	<1	<1	<1
Tin	ppm	ASTM D5185m	>40	<1	0	0
Antimony	ppm	ASTM D5185m				
Vanadium	ppm	ASTM D5185m		0	0	<1
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		<1	0	<1
Manganese	ppm	ASTM D5185m		<1	0	<1
Magnesium	ppm	ASTM D5185m		<1	<1	1
Calcium	ppm	ASTM D5185m		10	8	<1
Phosphorus	ppm	ASTM D5185m		10	3	17
Zinc	ppm	ASTM D5185m		0	0	0
Sulfur	ppm	ASTM D5185m		5310	3936	4767
CONTAMINANTS	• •	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	<1	<1	1
Sodium	ppm	ASTM D5185m	720	4	0	1
Potassium	ppm	ASTM D5185m	>20	1	1	0
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		860	1825	1741
Particles >6µm		ASTM D7647	>1300	244	507	450
Particles >14µm		ASTM D7647	>160	16	27	42
Particles >21µm		ASTM D7647		3	3	10
Particles >38µm		ASTM D7647	>10	0	0	0
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>/17/14	17/15/11	18/16/12	18/16/13
FLUID DEGRADA	TION_	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.08	0.119	0.05
				0.00	010	0.00



OIL ANALYSIS REPORT

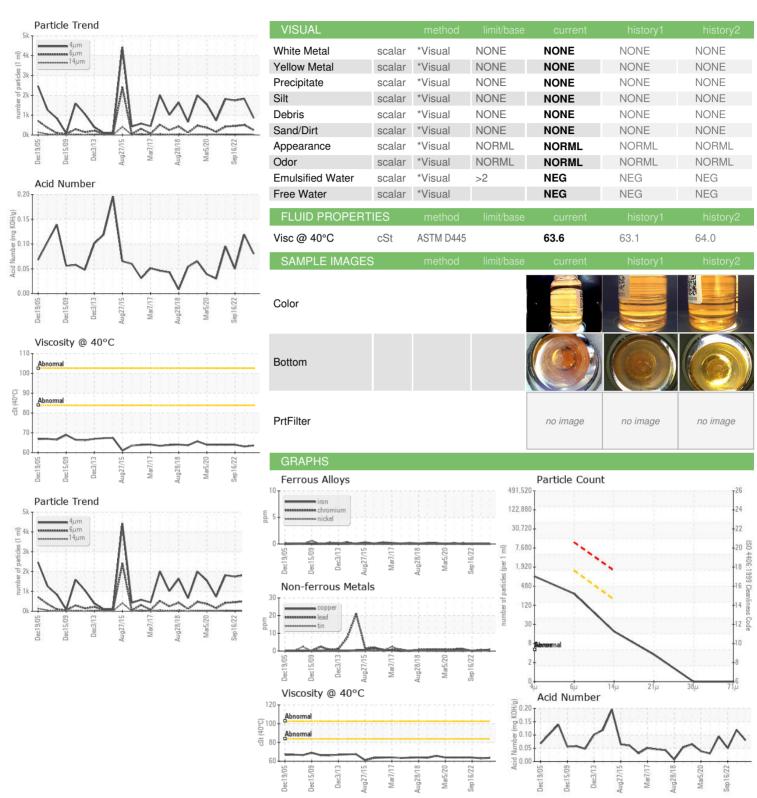





Certificate L2367

Laboratory Sample No. Lab Number **Unique Number**

: WC0845045 : 05960561 : 10661774

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 25 Sep 2023 Diagnosed

: 27 Sep 2023 Diagnostician : Don Baldridge

Test Package : PLANT (Additional Tests: FilterPatch) To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

NEW YORK POWER AUTHORITY

PO BOX 700 MASSENA, NY US 13662

Contact: ANDY WESTMACOTT Andy.Westmacott@nypa.gov

T: (315)764-6250 F: (315)764-6612