



OIL ANALYSIS REPORT

Sample Rating Trend


NORMAL



Machine Id
BALDWIN U-25 GENERATOR

Component
Thrust Bearing

Fluid
NOT GIVEN (2000 GAL)

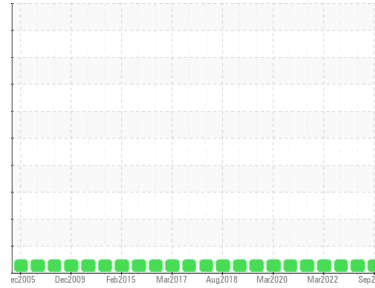

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0845039	WC0786725	WC0731016
Sample Date	Client Info		12 Sep 2023	03 Mar 2023	16 Sep 2022
Machine Age	yrs	Client Info	0	0	0
Oil Age	yrs	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			NORMAL	NORMAL	NORMAL

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >85	0	0	0
Chromium	ppm	ASTM D5185m >20	0	0	0
Nickel	ppm	ASTM D5185m >20	0	0	0
Titanium	ppm	ASTM D5185m	0	0	<1
Silver	ppm	ASTM D5185m	0	0	<1
Aluminum	ppm	ASTM D5185m >40	0	<1	0
Lead	ppm	ASTM D5185m >60	0	<1	0
Copper	ppm	ASTM D5185m >7	1	<1	<1
Tin	ppm	ASTM D5185m >40	<1	0	0
Vanadium	ppm	ASTM D5185m	0	0	<1
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0
Barium	ppm	ASTM D5185m	0	0	0
Molybdenum	ppm	ASTM D5185m	<1	0	<1
Manganese	ppm	ASTM D5185m	<1	0	1
Magnesium	ppm	ASTM D5185m	<1	<1	1
Calcium	ppm	ASTM D5185m	9	7	0
Phosphorus	ppm	ASTM D5185m	12	4	20
Zinc	ppm	ASTM D5185m	0	0	0
Sulfur	ppm	ASTM D5185m	6643	5172	6078

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<1	<1	1
Sodium	ppm	ASTM D5185m	3	0	<1
Potassium	ppm	ASTM D5185m >20	1	<1	0

FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		1599	784	1871
Particles >6µm	ASTM D7647 >2500		297	126	243
Particles >14µm	ASTM D7647 >320		13	4	9
Particles >21µm	ASTM D7647 >80		4	0	2
Particles >38µm	ASTM D7647 >20		0	0	0
Particles >71µm	ASTM D7647 >4		0	0	0
Oil Cleanliness	ISO 4406 (c)	>--/18/15	18/15/11	17/14/9	18/15/10


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.082	0.127	0.056




OIL ANALYSIS REPORT


Particle Trend

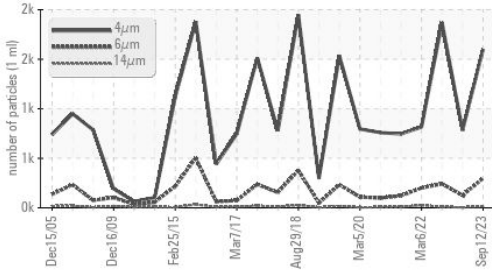


Acid Number

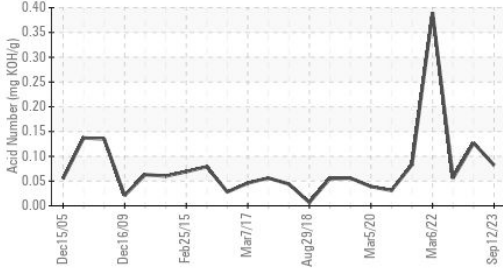

Viscosity @ 40°C

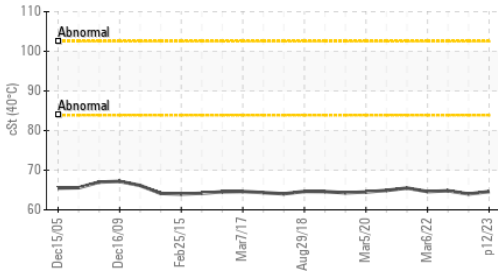

Particle Trend

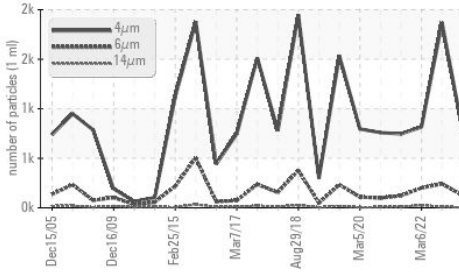

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	64.6	64.0	64.8

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color



Bottom




PrtFilter




GRAPHS


Ferrous Alloys

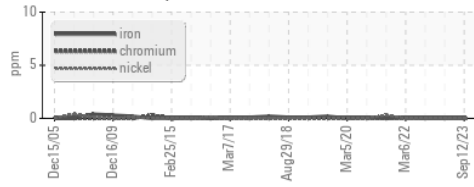


Non-ferrous Metals

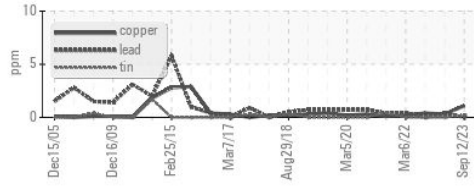


Viscosity @ 40°C

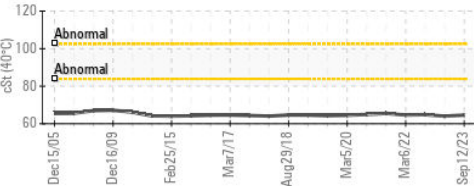

Particle Count

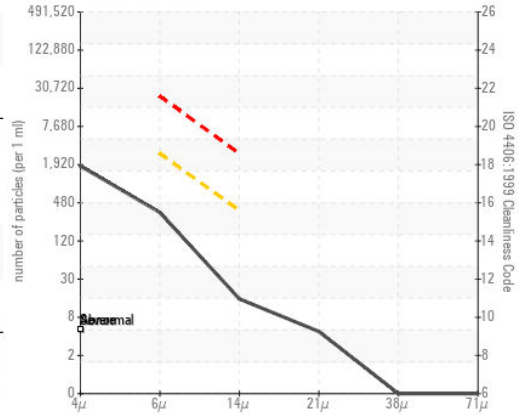

Acid Number

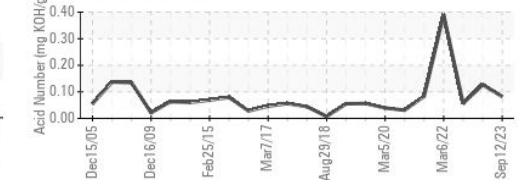

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : WC0845039
 Lab Number : 05960567
 Unique Number : 10661780
 Test Package : PLANT (Additional Tests: FilterPatch)

NEW YORK POWER AUTHORITY
 PO BOX 700
 MASSENA, NY
 US 13662
 Contact: ANDY WESTMACOTT
 Andy.Westmacott@nypa.gov
 T: (315)764-6250
 F: (315)764-6612

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)