

OIL ANALYSIS REPORT

Sample Rating Trend

xc0055 May2009 Juu2011 Feb2015 Aug2016 Feb2018 May2020 May2022 Sep201





BALDWIN U-30 GENERATOR

Component

Thrust Bearing

NOT GIVEN (2000 GAL)

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

mc2005 Mmy2009 Junc2011 Feb.2015 Aug/2016 Feb.2018 Mmz2020 Mmz0222 Bmp2016						
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0845029	WC0786715	WC0731026
Sample Date		Client Info		13 Sep 2023	03 Mar 2023	16 Sep 2022
Machine Age	yrs	Client Info		0	0	0
Oil Age	yrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>85	0	0	0
Chromium	ppm	ASTM D5185m	>20	0	0	0
Nickel	ppm	ASTM D5185m	>20	0	0	0
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m		0	0	<1
Aluminum	ppm	ASTM D5185m	>40	0	<1	0
Lead	ppm	ASTM D5185m	>60	0	<1	0
Copper	ppm	ASTM D5185m	>7	1	<1	<1
Tin	ppm	ASTM D5185m	>40	<1	0	0
Vanadium	ppm	ASTM D5185m		0	0	<1
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		<1	0	<1
Manganese	ppm	ASTM D5185m		<1	0	<1
Magnesium	ppm	ASTM D5185m		<1	<1	1
Calcium	ppm	ASTM D5185m		10	9	1
Phosphorus	ppm	ASTM D5185m		12	6	20
Zinc	ppm	ASTM D5185m		0	<1	0
Sulfur	ppm	ASTM D5185m		6764	5427	6299
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	<1	0	1
Sodium	ppm	ASTM D5185m		3	0	<1
Potassium	ppm	ASTM D5185m	>20	1	1	0
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		569	462	1135
Particles >6µm		ASTM D7647	>1300	133	95	257
Particles >14µm		ASTM D7647	>160	8	5	22
Particles >21µm		ASTM D7647	>40	1	1	6
Particles >38µm		ASTM D7647	>10	0	0	1
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>/17/14	16/14/10	16/14/10	17/15/12
FLUID DEGRADA	TION	method	limit/base	current	history1	history2

Acid Number (AN) mg KOH/g ASTM D8045


0.11

0.066

0.065



OIL ANALYSIS REPORT

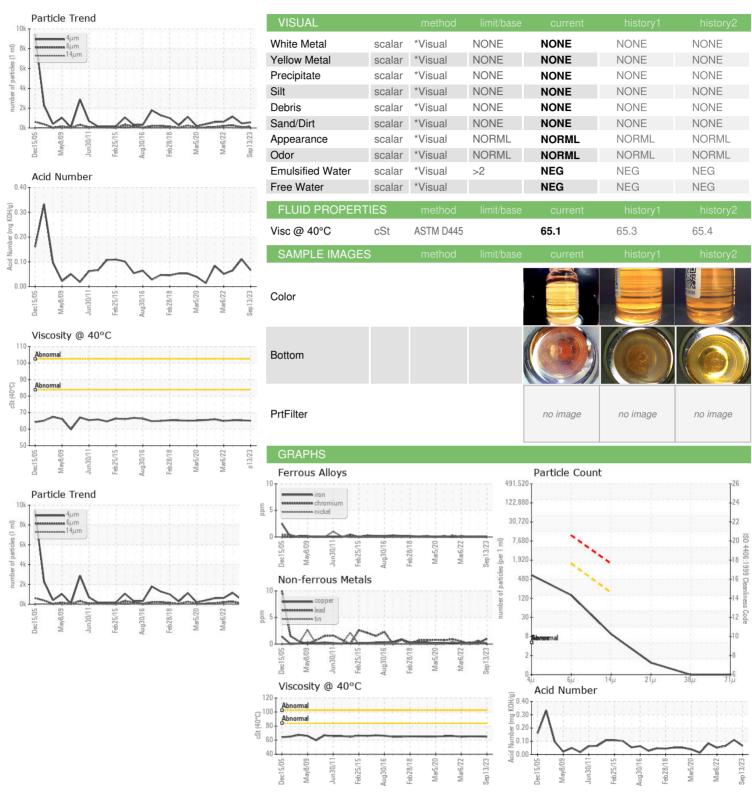





Certificate L2367

Laboratory Sample No. Lab Number **Unique Number**

: WC0845029 : 05960577 : 10661790

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 25 Sep 2023 Diagnosed : 27 Sep 2023

Diagnostician : Don Baldridge Test Package : PLANT (Additional Tests: FilterPatch)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

NEW YORK POWER AUTHORITY

PO BOX 700 MASSENA, NY US 13662

Contact: ANDY WESTMACOTT Andy.Westmacott@nypa.gov

T: (315)764-6250 F: (315)764-6612

Report Id: NEWMAS [WUSCAR] 05960577 (Generated: 09/28/2023 09:40:47) Rev: 1

Contact/Location: ANDY WESTMACOTT - NEWMAS