




OIL ANALYSIS REPORT

Sample Rating Trend

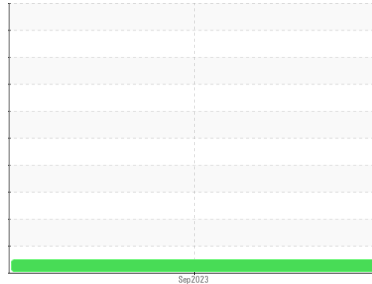

NORMAL



Machine Id
KAESER ASD25T 6166591 (S/N 1126)

Component
Compressor
 Fluid
KAESER SIGMA (OEM) M-460 (6 GAL)

DIAGNOSIS

Recommendation

The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

| | method | limit/base | current | history1 | history2 |
|---------------|-------------|-------------|--------------------|----------|----------|
| Sample Number | Client Info | | KCPA006346 | --- | --- |
| Sample Date | Client Info | | 01 Sep 2023 | --- | --- |
| Machine Age | hrs | Client Info | 14454 | --- | --- |
| Oil Age | hrs | Client Info | 0 | --- | --- |
| Oil Changed | | Client Info | N/A | --- | --- |
| Sample Status | | | NORMAL | --- | --- |

WEAR METALS

| | method | limit/base | current | history1 | history2 |
|----------|--------|-----------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185m >50 | 0 | --- | --- |
| Chromium | ppm | ASTM D5185m >10 | 0 | --- | --- |
| Nickel | ppm | ASTM D5185m >3 | 0 | --- | --- |
| Titanium | ppm | ASTM D5185m >3 | 0 | --- | --- |
| Silver | ppm | ASTM D5185m >2 | <1 | --- | --- |
| Aluminum | ppm | ASTM D5185m >10 | 0 | --- | --- |
| Lead | ppm | ASTM D5185m >10 | 0 | --- | --- |
| Copper | ppm | ASTM D5185m >50 | 20 | --- | --- |
| Tin | ppm | ASTM D5185m >10 | <1 | --- | --- |
| Vanadium | ppm | ASTM D5185m | 0 | --- | --- |
| Cadmium | ppm | ASTM D5185m | 0 | --- | --- |

ADDITIVES

| | method | limit/base | current | history1 | history2 |
|------------|--------|-------------------|--------------|----------|----------|
| Boron | ppm | ASTM D5185m 0 | 0 | --- | --- |
| Barium | ppm | ASTM D5185m 90 | 0 | --- | --- |
| Molybdenum | ppm | ASTM D5185m 0 | <1 | --- | --- |
| Manganese | ppm | ASTM D5185m | <1 | --- | --- |
| Magnesium | ppm | ASTM D5185m 100 | 1 | --- | --- |
| Calcium | ppm | ASTM D5185m 0 | 2 | --- | --- |
| Phosphorus | ppm | ASTM D5185m 0 | 4 | --- | --- |
| Zinc | ppm | ASTM D5185m 0 | 0 | --- | --- |
| Sulfur | ppm | ASTM D5185m 23500 | 18939 | --- | --- |

CONTAMINANTS

| | method | limit/base | current | history1 | history2 |
|-----------|--------|------------------|--------------|----------|----------|
| Silicon | ppm | ASTM D5185m >25 | <1 | --- | --- |
| Sodium | ppm | ASTM D5185m | 3 | --- | --- |
| Potassium | ppm | ASTM D5185m >20 | 1 | --- | --- |
| Water | % | ASTM D6304 >0.05 | 0.006 | --- | --- |
| ppm Water | ppm | ASTM D6304 >500 | 66.9 | --- | --- |






FLUID CLEANLINESS

| | method | limit/base | current | history1 | history2 |
|-----------------|--------------|------------|-----------------|----------|----------|
| Particles >4µm | ASTM D7647 | | 1282 | --- | --- |
| Particles >6µm | ASTM D7647 | >1300 | 419 | --- | --- |
| Particles >14µm | ASTM D7647 | >80 | 26 | --- | --- |
| Particles >21µm | ASTM D7647 | >20 | 4 | --- | --- |
| Particles >38µm | ASTM D7647 | >4 | 0 | --- | --- |
| Particles >71µm | ASTM D7647 | >3 | 0 | --- | --- |
| Oil Cleanliness | ISO 4406 (c) | >--/17/13 | 17/16/12 | --- | --- |

FLUID DEGRADATION

| | method | limit/base | current | history1 | history2 |
|------------------|----------|----------------|-------------|----------|----------|
| Acid Number (AN) | mg KOH/g | ASTM D8045 1.0 | 0.36 | --- | --- |


OIL ANALYSIS REPORT

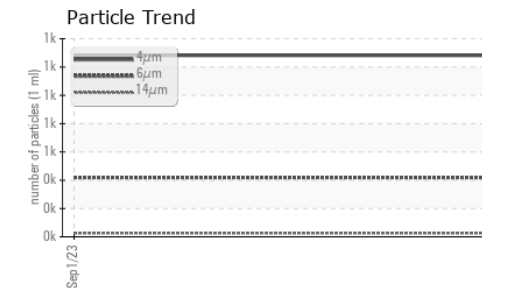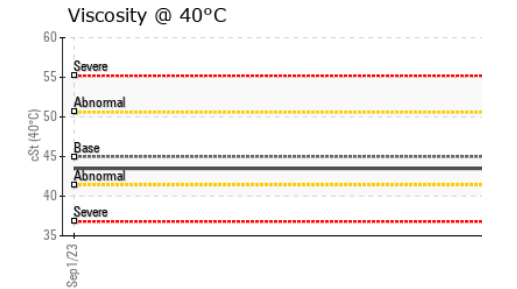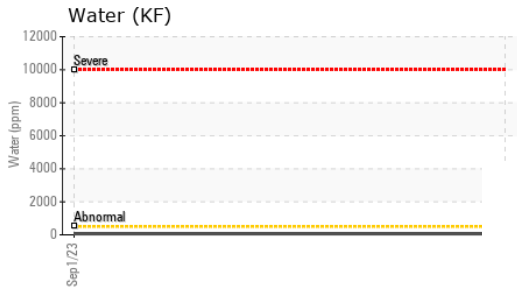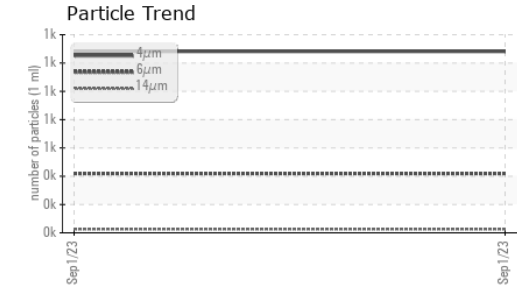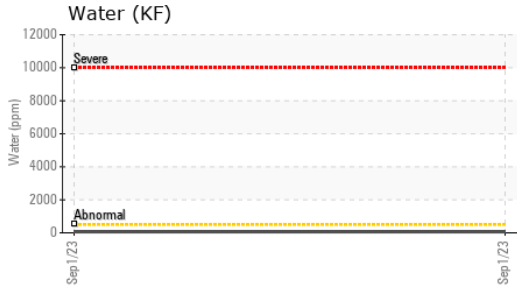






| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|---------------|--------------|----------|----------|
| White Metal | scalar | *Visual NONE | LIGHT | --- | --- |
| Yellow Metal | scalar | *Visual NONE | NONE | --- | --- |
| Precipitate | scalar | *Visual NONE | NONE | --- | --- |
| Silt | scalar | *Visual NONE | NONE | --- | --- |
| Debris | scalar | *Visual NONE | NONE | --- | --- |
| Sand/Dirt | scalar | *Visual NONE | NONE | --- | --- |
| Appearance | scalar | *Visual NORML | NORML | --- | --- |
| Odor | scalar | *Visual NORML | NORML | --- | --- |
| Emulsified Water | scalar | *Visual >0.05 | NEG | --- | --- |
| Free Water | scalar | *Visual | NEG | --- | --- |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|--------------|-------------|----------|----------|
| Visc @ 40°C | cSt | ASTM D445 45 | 43.5 | --- | --- |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
|---------------|--------|------------|---------|----------|----------|

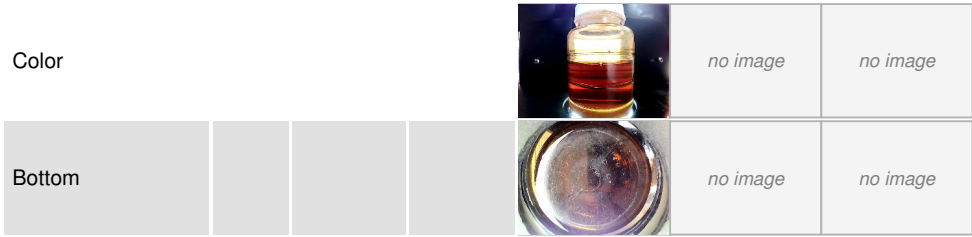

GRAPHS

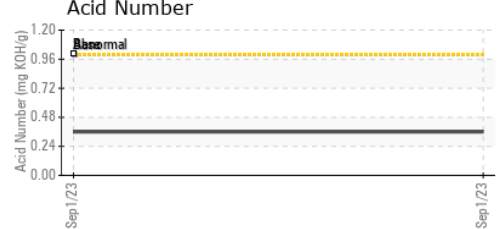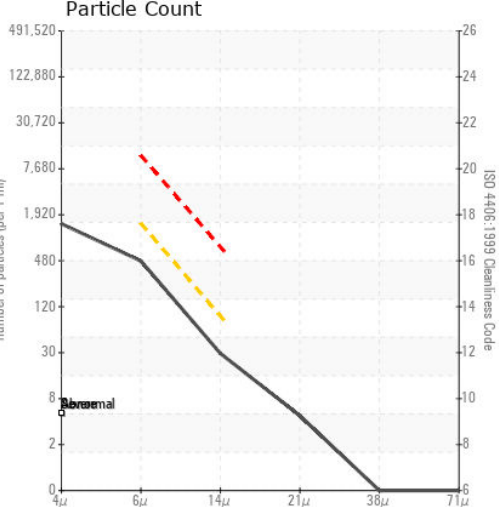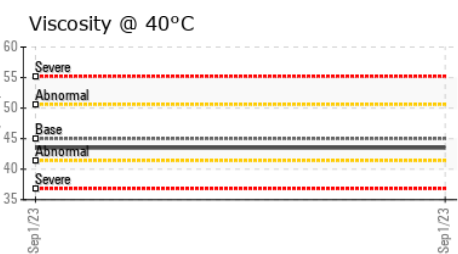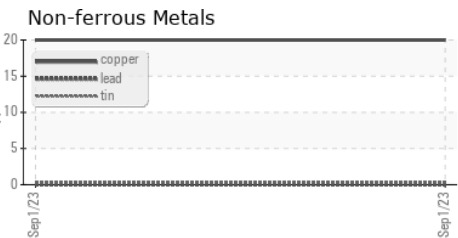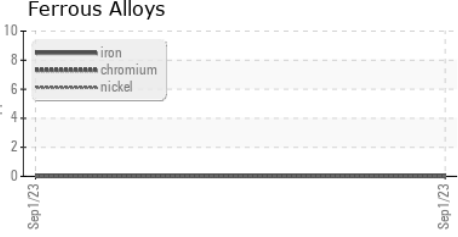

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KCPA006346 **Received** : 25 Sep 2023
Lab Number : 05960615 **Diagnosed** : 27 Sep 2023
Unique Number : 10661828 **Diagnostician** : Angela Borella
Test Package : IND 2 (Additional Tests: KF, PrtCount)

GERLING & ASSOCIATES
 138 STELZER RD
 SUNBURY, OH
 US 43074
 Contact: PURCHASING
 PURCHASING@GERLINGGROUP.COM

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: