

# **PROBLEM SUMMARY**

Sample Rating Trend




KAESER 0903778

Component

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

# **COMPONENT CONDITION SUMMARY**

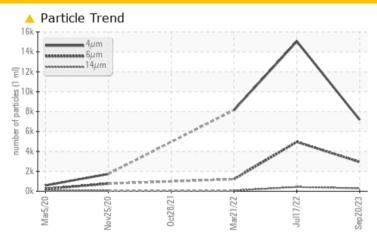

## RECOMMENDATION

The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

| PROBLEMATIC TEST RESULTS |              |         |                 |             |        |  |  |  |  |
|--------------------------|--------------|---------|-----------------|-------------|--------|--|--|--|--|
| Sample Status            |              |         | ABNORMAL        | ABNORMAL    | NORMAL |  |  |  |  |
| Particles >6µm           | ASTM D7647   | >1300   | <b>2940</b>     | <b>4957</b> | 1218   |  |  |  |  |
| Particles >14μm          | ASTM D7647   | >80     | <b>295</b>      | <b>431</b>  | 72     |  |  |  |  |
| Particles >21μm          | ASTM D7647   | >20     | <u>^</u> 66     | <b>6</b> 0  | 21     |  |  |  |  |
| Oil Cleanliness          | ISO 4406 (c) | >/17/13 | <b>20/19/15</b> | 21/19/16    | 17/13  |  |  |  |  |

Customer Id: MENNEE Sample No.: KCPA006422 Lab Number: 05960641 Test Package: IND 2

To manage this report scan the QR code

To discuss the diagnosis or test data: Angela Borella +1 800-237-1369 angela.borella@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

## **RECOMMENDED ACTIONS**

There are no recommended actions for this sample.

## HISTORICAL DIAGNOSIS

## 17 Jul 2022 Diag: Angela Borella

ISO



Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.



## 21 Mar 2022 Diag: Don Baldridge

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



## 28 Oct 2021 Diag: Don Baldridge

VIS DEBRIS




No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample. All component wear rates are normal. Moderate concentration of visible dirt/debris present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





# **OIL ANALYSIS REPORT**

Sample Rating Trend

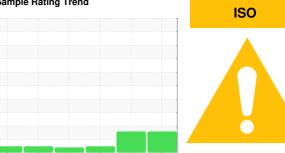

# **KAESER 0903778**

Component

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

# **DIAGNOSIS**

## Recommendation

The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

All component wear rates are normal.

# Contamination

There is a high amount of particulates present in the oil.

## **Fluid Condition**


The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

|                 |        | Mar2020      | Nov2020 Oct2021 | Mar2022 Jul2022   | Sep2023           |             |
|-----------------|--------|--------------|-----------------|-------------------|-------------------|-------------|
| SAMPLE INFORM   | MATION | method       | limit/base      | current           | history1          | history2    |
| Sample Number   |        | Client Info  |                 | KCPA006422        | KC103378          | KCP37143    |
| Sample Date     |        | Client Info  |                 | 20 Sep 2023       | 17 Jul 2022       | 21 Mar 2022 |
| Machine Age     | hrs    | Client Info  |                 | 34530             | 24782             | 21759       |
| Oil Age         | hrs    | Client Info  |                 | 0                 | 6025              | 3002        |
| Oil Changed     |        | Client Info  |                 | N/A               | Changed           | Not Changd  |
| Sample Status   |        |              |                 | ABNORMAL          | ABNORMAL          | NORMAL      |
| WEAR METALS     |        | method       | limit/base      | current           | history1          | history2    |
| Iron            | ppm    | ASTM D5185m  | >50             | 0                 | <1                | <1          |
| Chromium        | ppm    | ASTM D5185m  | >10             | 0                 | 0                 | 0           |
| Nickel          | ppm    | ASTM D5185m  | >3              | 0                 | 0                 | 0           |
| Titanium        | ppm    | ASTM D5185m  | >3              | 0                 | 0                 | 0           |
| Silver          | ppm    | ASTM D5185m  | >2              | 0                 | <1                | 0           |
| Aluminum        | ppm    | ASTM D5185m  | >10             | 0                 | <1                | <1          |
| Lead            | ppm    | ASTM D5185m  | >10             | 0                 | <1                | 0           |
| Copper          | ppm    |              | >50             | 7                 | 11                | 4           |
| Tin             | ppm    | ASTM D5185m  | >10             | <1                | <1                | 0           |
| Antimony        | ppm    | ASTM D5185m  |                 |                   |                   |             |
| Vanadium        | ppm    | ASTM D5185m  |                 | 0                 | 0                 | 0           |
| Cadmium         | ppm    | ASTM D5185m  |                 | 0                 | 0                 | 0           |
| ADDITIVES       |        | method       | limit/base      | current           | history1          | history2    |
| Boron           | ppm    | ASTM D5185m  |                 | 0                 | 0                 | 0           |
| Barium          | ppm    | ASTM D5185m  | 90              | 0                 | 0                 | 23          |
| Molybdenum      | ppm    | ASTM D5185m  |                 | <1                | 0                 | 0           |
| Manganese       | ppm    | ASTM D5185m  |                 | <1                | 0                 | 0           |
| Magnesium       | ppm    | ASTM D5185m  | 90              | 31                | 20                | 57          |
| Calcium         | ppm    | ASTM D5185m  | 2               | 2                 | 0                 | 1           |
| Phosphorus      | ppm    | ASTM D5185m  |                 | 3                 | 4                 | 2           |
| Zinc            | ppm    | ASTM D5185m  |                 | 17                | 19                | 12          |
| Sulfur          | ppm    | ASTM D5185m  |                 | 21864             | 19701             | 17077       |
| CONTAMINANTS    | 5      | method       | limit/base      | current           | history1          | history2    |
| Silicon         | ppm    | ASTM D5185m  | >25             | <1                | <1                | <1          |
| Sodium          | ppm    | ASTM D5185m  |                 | 21                | 9                 | 31          |
| Potassium       | ppm    |              | >20             | 4                 | 4                 | 10          |
| Water           | %      | ASTM D6304   |                 | 0.020             | 0.019             | 0.016       |
| ppm Water       | ppm    | ASTM D6304   | >500            | 207.9             | 194.2             | 163.2       |
| FLUID CLEANLIN  | IESS   | method       | limit/base      | current           | history1          | history2    |
| Particles >4µm  |        | ASTM D7647   |                 | 7174              | 15051             | 8153        |
| Particles >6µm  |        | ASTM D7647   | >1300           | <u>^</u> 2940     | <b>4957</b>       | 1218        |
| Particles >14μm |        | ASTM D7647   | >80             | <u>^</u> 295      | <u>431</u>        | 72          |
| Particles >21μm |        | ASTM D7647   | >20             | <u>^</u> 66       | <b>△</b> 60       | 21          |
| Particles >38μm |        | ASTM D7647   | >4              | 2                 | 2                 | 0           |
| Particles >71μm |        | ASTM D7647   | >3              | 1                 | 0                 | 0           |
| Oil Cleanliness |        | ISO 4406 (c) | >/17/13         | <u>^</u> 20/19/15 | <u>^</u> 21/19/16 | 17/13       |
| FLUID DEGRADA   | ATION  | method       | limit/base      | current           | history1          | history2    |
|                 |        |              |                 |                   |                   |             |

0.33



# **OIL ANALYSIS REPORT**

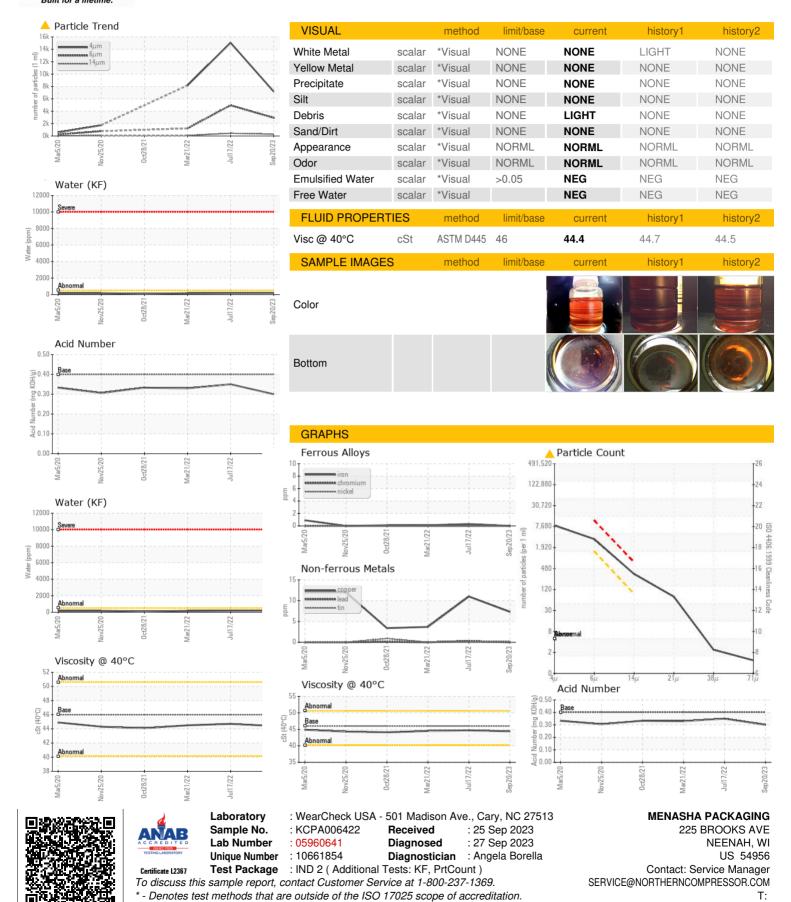

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: