

PROBLEM SUMMARY

Sample Rating Trend

ISO

Machine Id


KAESER SM 11 1128896 (S/N 1012)

Component

Compressor

KAESER SIGMA (OEM) M-460 (--- QTS)

COMPONENT CONDITION SUMMARY

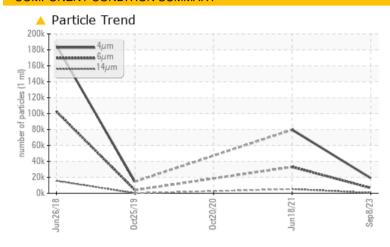

RECOMMENDATION

The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS									
Sample Status			ABNORMAL	ABNORMAL	ABNORMAL				
Particles >6µm	ASTM D7647	>1300	△ 6657	<u>▲</u> 33133					
Particles >14μm	ASTM D7647	>80	<u></u> 504	<u></u> 5278					
Particles >21µm	ASTM D7647	>20	<u> </u>	▲ 1703					
Oil Cleanliness	ISO 4406 (c)	>/17/13	21/20/16	<u>22/20</u>					

Customer Id: WOBWOB Sample No.: KCPA006291 Lab Number: 05960666 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Angela Borella +1 800-237-1369 angela.borella@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

18 Jun 2021 Diag: Angela Borella

ISO



The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



20 Oct 2020 Diag:

VIS DEBRIS



Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. Moderate concentration of visible dirt/debris present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



25 Oct 2019 Diag: Don Baldridge

ISO




No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





OIL ANALYSIS REPORT

Sample Rating Trend

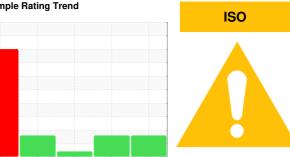

KAESER SM 11 1128896 (S/N 1012)

Compressor

KAESER SIGMA (OEM) M-460 (--- QTS)

DIAGNOSIS

Recommendation

The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		Jun2018	0et2019	Oct2020 Jun2021	Sep 2023	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA006291	KCP42190	KCP31542
Sample Date		Client Info		08 Sep 2023	18 Jun 2021	20 Oct 2020
Machine Age	hrs	Client Info		44187	39661	38412
Oil Age	hrs	Client Info		0	1249	1978
Oil Changed		Client Info		N/A	Not Changd	Changed
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<1	1	2
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	<1
Aluminum	ppm	ASTM D5185m	>10	0	0	0
Lead	ppm	ASTM D5185m	>10	0	<1	0
Copper	ppm	ASTM D5185m	>50	8	4	7
Tin	ppm	ASTM D5185m	>10	<1	<1	0
Antimony	ppm	ASTM D5185m			0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	1
Barium	ppm	ASTM D5185m	90	0	29	0
Molybdenum	ppm	ASTM D5185m	0	<1	0	0
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	100	5	63	25
Calcium	ppm	ASTM D5185m	0	<1	1	0
Phosphorus	ppm	ASTM D5185m	0	3	2	2
Zinc	ppm	ASTM D5185m	0	0	0	<1
Sulfur	ppm	ASTM D5185m	23500	23128	18638	19975
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	1	0	2
Sodium	ppm	ASTM D5185m		4	21	8
Potassium	ppm	ASTM D5185m	>20	1	3	2
Water	%	ASTM D6304	>0.05	0.008	0.027	0.019
ppm Water	ppm	ASTM D6304	>500	82.1	274.5	197.0
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4μm		ASTM D7647		19010	79783	
Particles >6µm		ASTM D7647	>1300	6657	▲ 33133	
Particles >14μm		ASTM D7647	>80	504	<u>▲</u> 5278	
Particles >21µm		ASTM D7647	>20	<u> </u>	▲ 1703	
Particles >38µm		ASTM D7647	>4	4	4 7	
Particles >71μm		ASTM D7647	>3	1	2	
Oil Cleanliness		ISO 4406 (c)	>/17/13	<u>^</u> 21/20/16	<u>22/20</u>	
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
<u> </u>						

0.383

0.394



OIL ANALYSIS REPORT

